

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 27, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

☒ On 6/12/2026 found a 1/2"x10" bent iron with a barn spike along side.
DATE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7/28/2026 placed a 5/8" iron with seal #43844.
DATE

SKETCH OF REFERENCE TIES

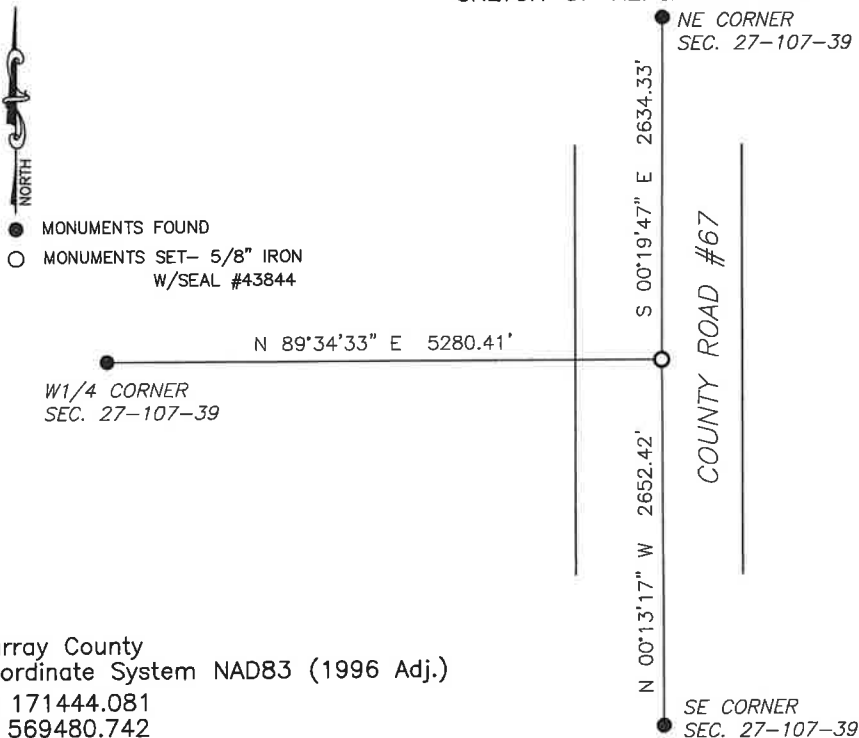

Murray County
Coordinate System NAD83 (1996 Adj.)
N: 171444.081
E: 569480.742

Statement of evidence relative to this corner location is on back of page.

RECORDING INFORMATION


I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision



Daniel L. Bueltel
License No. 43844

7/31/2026
DATE

AUG 05 2026



MURRAY COUNTY RECORDER

Statement of Evidence

East Quarter Corner Section 27, T107N, R39W of the 5th P.M.

October 10, 1857 - J.W. Myers surveyed the east boundary line of the township.

July 23, 1861 - J.W. Myers surveyed the north, south, and west boundary lines of the township.

September 2, 1861 - L. Brockmann subdivided the township.

1901 & 1909 corner established midway and on line between section corners.
(distances 2650.7' per half mile)

No Date - MNDOT highway plans note the corner to be in line with fence to west and 158'± south of center line of MN T. H. No. 30

May 19, 2000 - Zieske Land Surveying found a iron monument in place at the corner per MNDOT plans.

June 12, 2012 - County records note an iron monument in place at the corner with a barn spike next to it.

June 12, 2026 - Bueltel-Moseng Land Surveying found a $\frac{1}{2}$ " bent iron with a barn spike next to it. Iron is 157'± south of center line of MN T. H. No. 30. Found iron is within 1.5'± of recorded distance from southwest corner as noted in 1901 & 1909 surveys.

July 28, 2026 - Bueltel-Moseng Land Surveying set a $\frac{5}{8}$ " iron with seal #43844 in place of the found $\frac{1}{2}$ " iron after the county replaced a center line culvert.