


SURVEYOR'S RECORD

2
3

Range 39

Township 106

Section 2

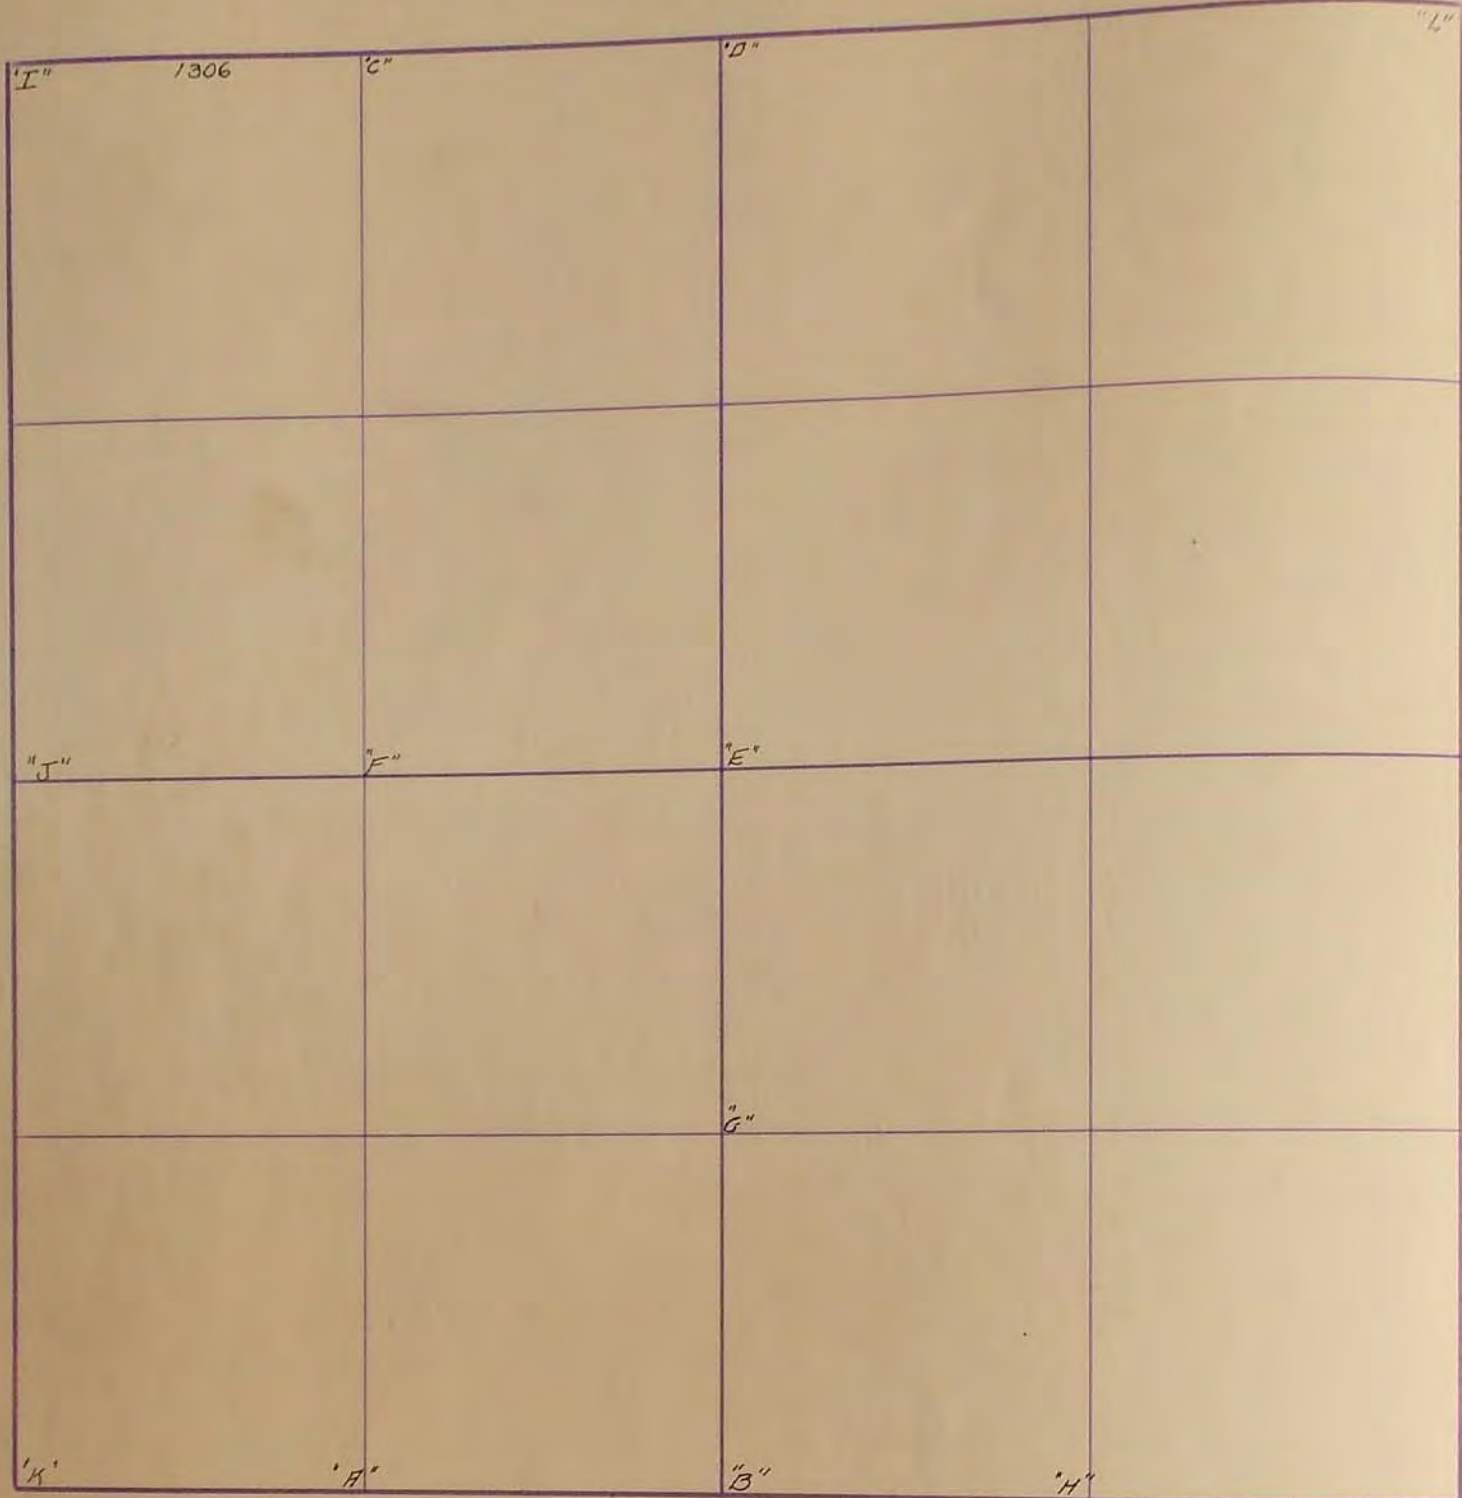

Surveyed Sept 1892 S.P. McIntyre Depts.

- 'A' Placed stone 16" x 14" x 25" Marked + 33' North of Cor.
 - 'B' Placed stone 10" x 20" x 20" " $\frac{1}{11}$ + 33' " " "
 - 'C' " " 12" x 13" x 20" Piece of Loth under stone
 - 'D' " " 12" x 16" x 24" in Marked \square Located field stone 12" below gravel surface July 17, 1973; Placed steel pin at angle over stone. R.P. N&C, P.P. SE. 51³¹; R.P. N&C Fence Post South 31⁷⁰; R.P. Chiseled 'X' North end & E. 39⁴³.
 - 'E' " " 12" x 15" x 20" " +
 - 'F' " " 15" x 15" x 20" " +
 - 'G' Iron 37" x 4 x $\frac{1}{2}$ " Part of Cutter bar
 - 'H' Round Iron $\frac{3}{4}$ " in Dia. 22 $\frac{1}{2}$ " Long
- Feb 5, 1934
- 'I' Concrete Stone + : R.P. Tack in Cor fence post S.W. 48³¹ : R.P. Tack in Cor fence post N.W. 41⁰
 - 'J' " " + : R.P. Tack in Cor fence post West on Line 33.6' : R.P. Tack in fence post N.W. 41¹
 - 'K' " " + : R.P. " " " " " N.W. 46¹ : R.P. Tack in Cor fence post NE. 46⁹ F.A. March.
 - 'L' Placed Stone R.P. Tack in fence post N.W. 40⁰ : R.P. Tack in Cor fence post S.W. 35² F.A. March 1934
 - 'H' Placed iron pin 3" below road grade 1967. R.P. N&C, P.P. SE. 58.4'
R.P. ~~NE. 40.4~~ ^{Spike 45.4} TP. N.W. 40.4; R.P. South Culv. end apron tie bolt S.W. 42.0'
 - 'J' Placed iron pin 3" below road grade 1967; R.P. N&C Cor. F.P. N. 49.8';
R.P. N&C, P.P. NE. 91.0'
 - 'L' Located field stone 10" below gravel surface July 17, 1973; Placed steel pin at angle above stone; R.P. N&C, P.P. NE. 54⁴⁹; R.P. Chiseled 'X' stone in ditch ENE. 47⁵⁹ Painted Red

SURVEY No. _____

Section 2

Town 106

Range 39

2645



FIELD NOTES.

{ At "A" Placed Stone 16x16x25 in Marked, thus
 As 33 ft North of Corner

+

Surveyed Sept 1892 S.P. McIntyre Dept. Co. Sr

{ "B" Placed Stone 10x20x28 in Marked
 and 33 ft North

2+
11

"I" Stone: R.P. Tack in fence post N.W. 40.2; R.P. Tack in corner fence
post S.W. 35.4
F.A. March 1934

C Placed Stone 12x13x20 in, Piece of lath under Stone

D Placed Stone 12x16x24 in Marked □

E Placed Stone 12x15x20 in Marked +

F Placed stone 15x15x20 marked +

G Drive an Iron 37x4x1/2 Part of Cutter bar

H Drive round Iron 3/4 in dia 22 in long

I 2 stones top one 10x10x12 Fence cor. 25.1 NE. Tel. pole 34.4 N.W.

February 5, 1934

- "I" - Concrete stone with +; R.P. - Tack in corner fence post S.W. 48.2; R.P. Tack in corner fence post N.W. 41.0.
- "J" - Concrete stone with +; R.P. Tack in corner fence post West on line 33.6; R.P. Tack in fence post N.W. 41.7.
- "K" - Concrete stone with +; R.P. Tack in corner fence post N.W. 46.7; R.P. Tack in corner fence post N.E. 46.9.

F.A. March