


SURVEYOR'S RECORD

Section 26

Township 106

Range 39

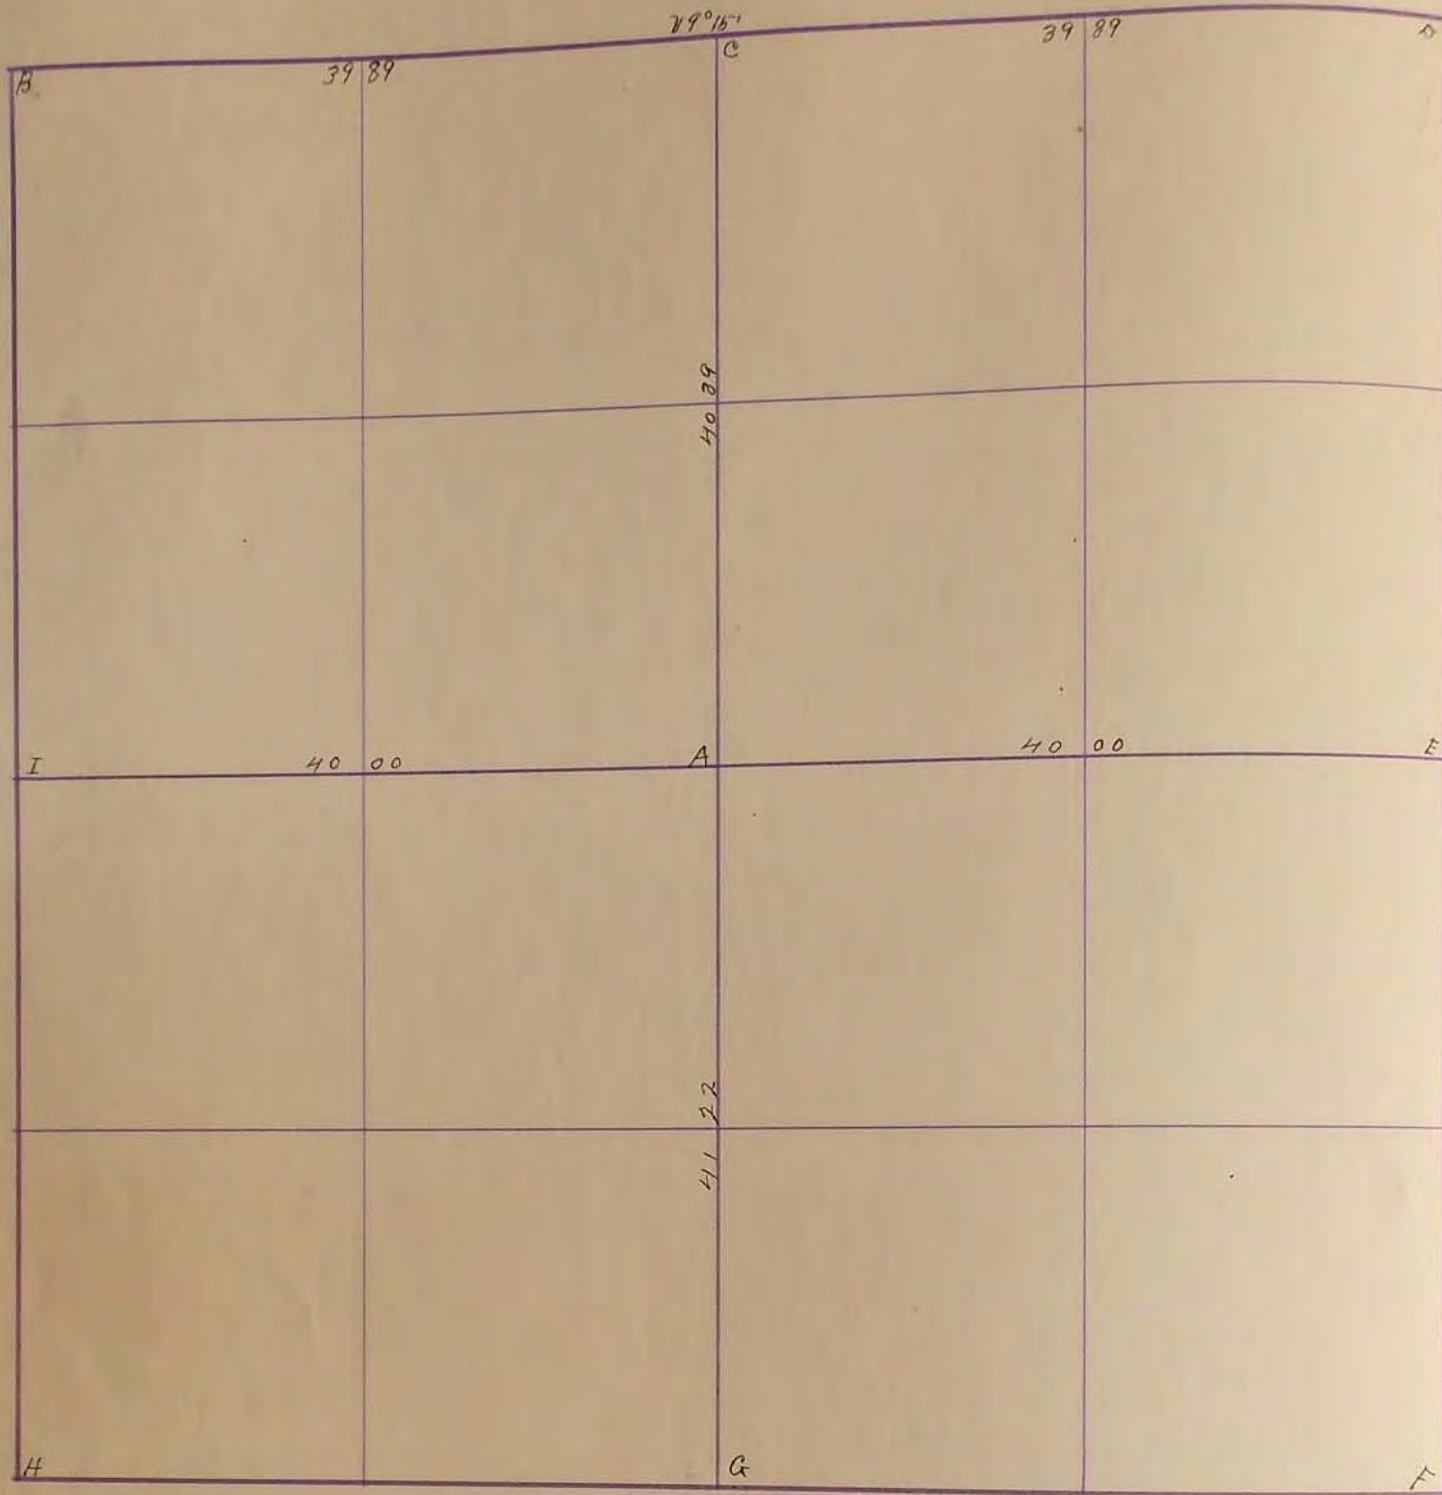

July 19, 1898

A. Cedar Post + Rite

B. Stone 8" X 8" X 18"

C. " 6" X 6" X 16"

D. " in Grade

E. Gov. Mound + Stone 6" X 6" X 12"

F. " "

G. " "

H. " "

I. " " + Stone

J. M. Woolstenhulme

February 5-1934

"I" Concrete Stone with +: R. P. Jack in cor.

Fence post East 32.6'; R. P. Jack in 3rd

" " Fence Post North of East cor. 57.9'

"H" "Concrete Stone" look at S.E. Cor. Sec 27-106-39.

"B" concrete stone with + R. P. Jack in cor.

Fence Post S.E. 47.6'; R. P. Jack in corner fence Post

N.E. 45.0'

T. A. March

"I" Placed iron pin 3" below road grade 1967

R.P., N&C., P.P. West 49.50'; R.P., N&C., Cor. F.P. East 64.30'


"G" South 1/4 Cor. Dug up exc hulk with back hoe, but lost location; Gov mound 2nd stone was located - hulk was removed at old road bed 2' below finished grade. Sept. 27, 1914

"F" Southeast Sec. Cor. - Located steel surveyors pin in old cor. 10' below pin with back hoe but did not find Gov mound. Steel pin R.P., N&C., P.P., N.W. 59.90'; R.P., N&C., T.P., N.E. 45.0'; R.P. N&C. Stop sign post S.E. 43.05'. Sept. 27, 1914

26
27

SURVEY No. 4012

Section 26 Town 106 Range 34

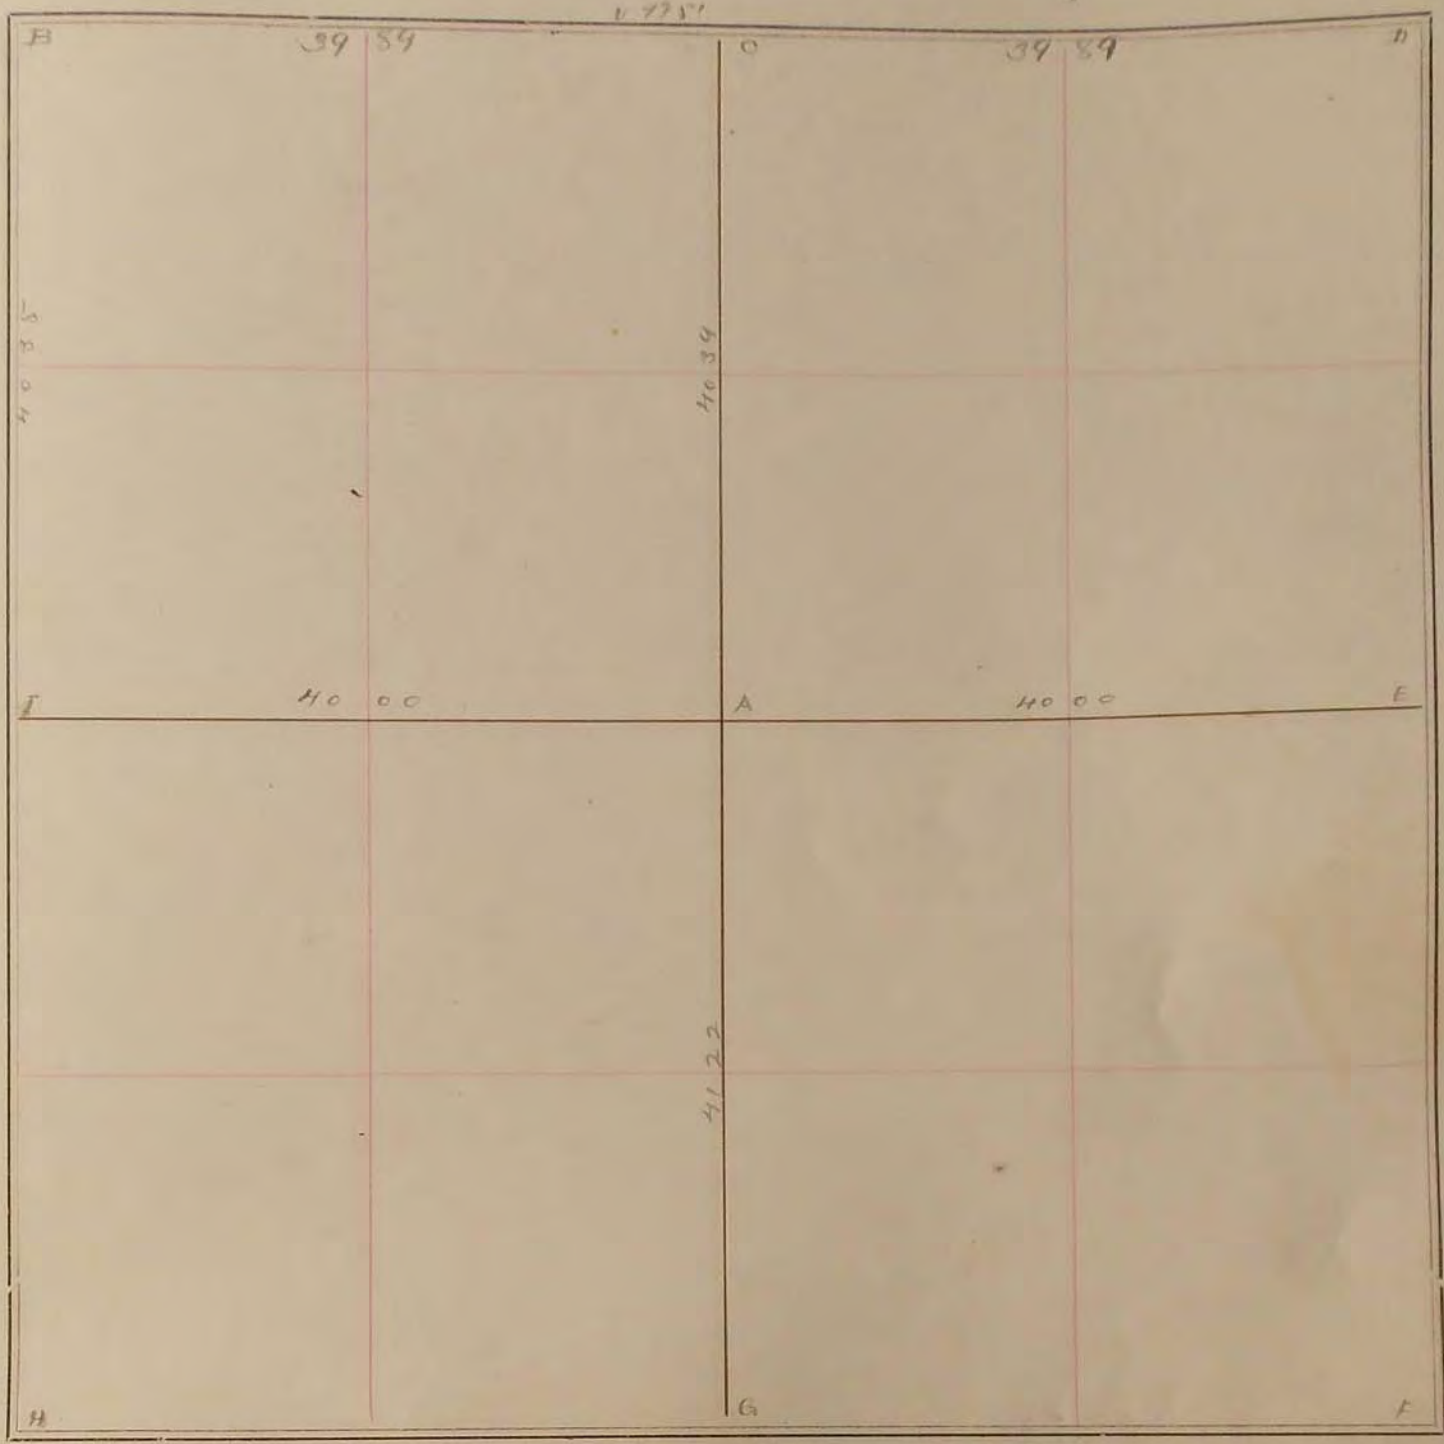

FIELD NOTES.

July 19, 1898,

- A. Cedar post + pits.
- B. Stone 8'x8'x18"
- C. " 6'x6'x16"
- D. " in grade
- E. Gov. mound + stone 6'x6'x12"
- F. " "
- G. " "
- H. " "
- I. " + Stone

2284
 2378
 2378
 2632

J. W. Woolstenhulst,

February 5, 1934

"I" Concrete stone with +: R.P. Tack in cor. fence post East 32.0'; R.P. Tack in 3rd fence post north of East cor. post 57.9'

"B" Concrete stone with +: R.P. Tack in cor. fence post S.E. 47.6'; R.P. Tack in corner fence post N.E. 45.0';
 J. A. March.