


# SURVEYOR'S RECORD

Section 26

Township 108

Range 40

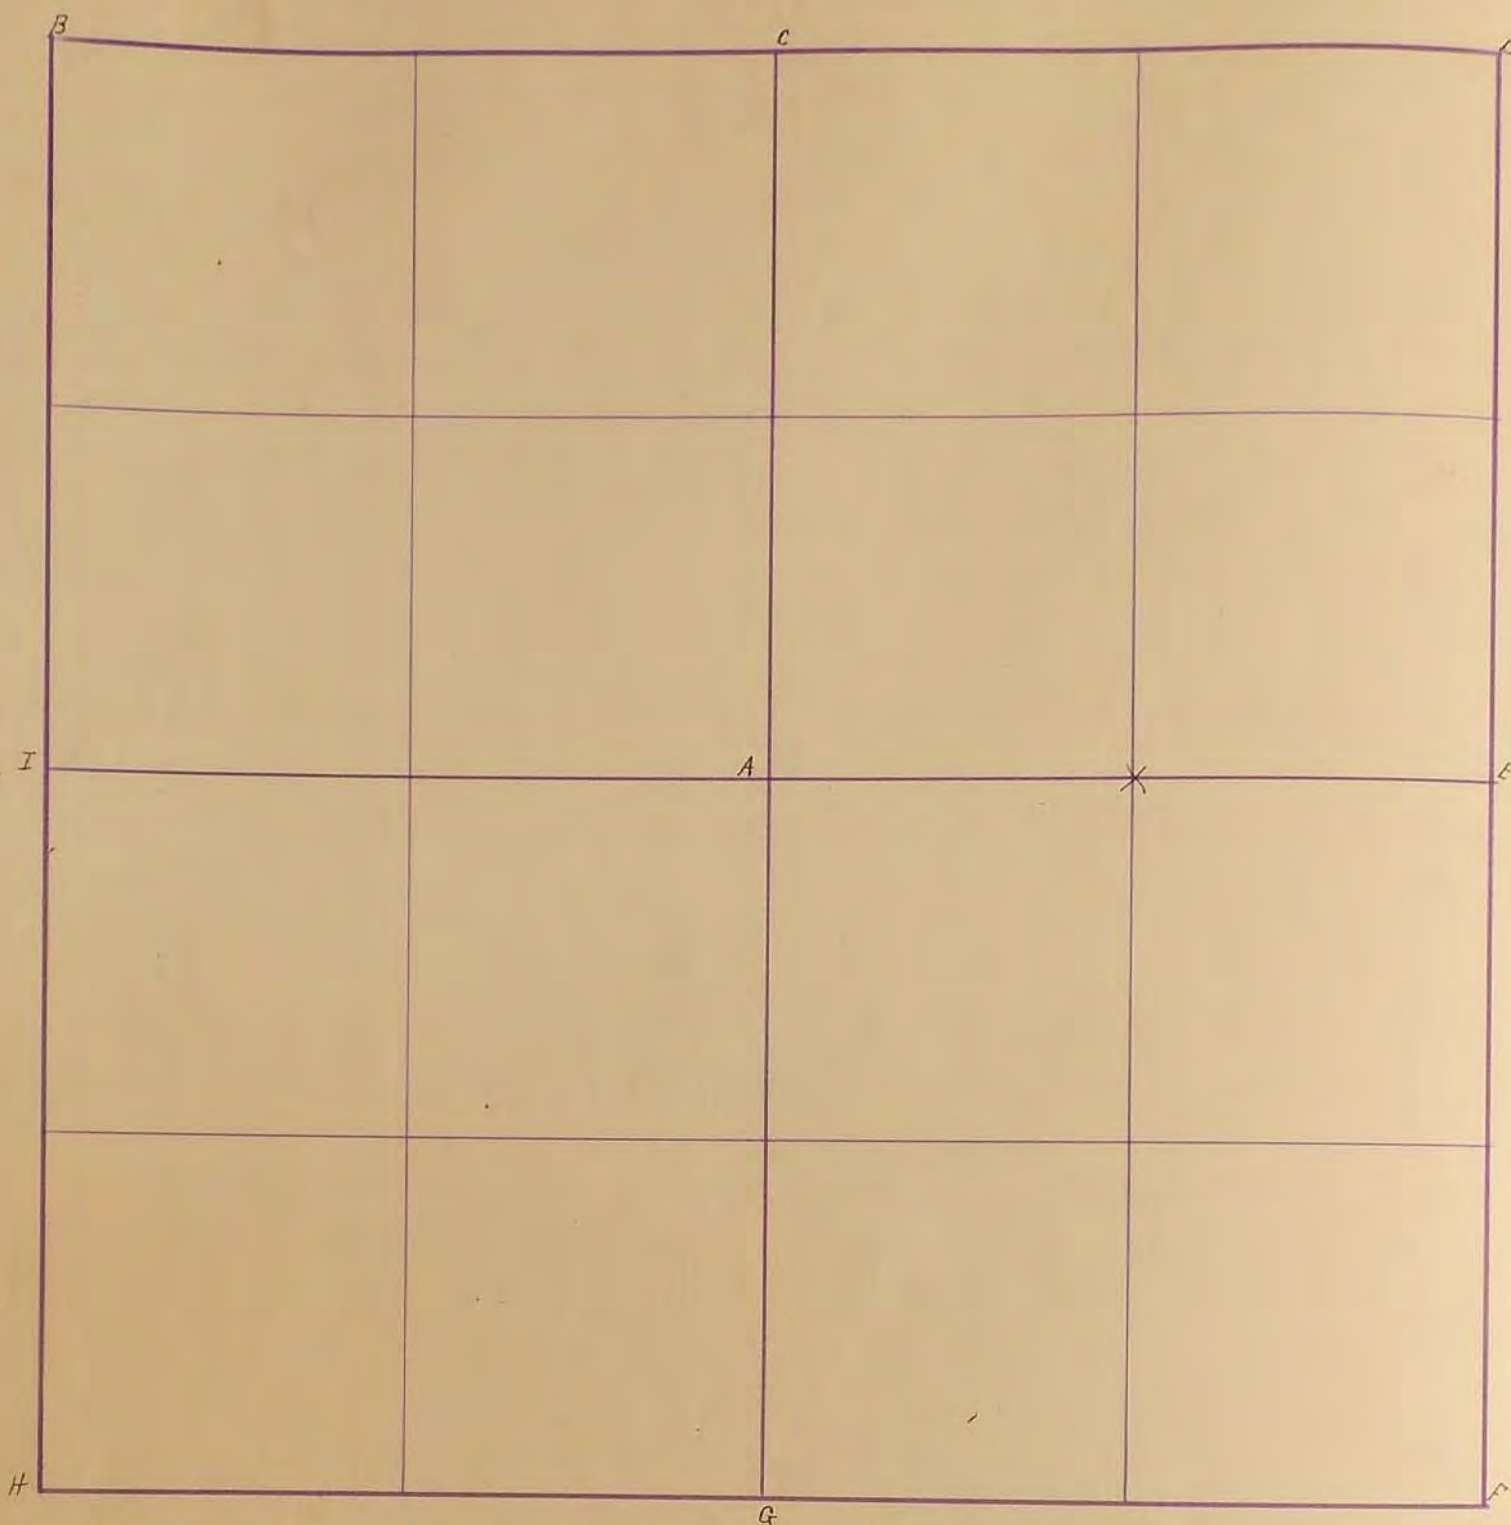

Found the center of Sect 26-108-40 - and set stakes there at

- 'A' Fence post in Cor.
- 'B' 33' East + 16 1/2' North of fence on sec 27 which was located by me when original Cors. were there
- 'C' 6" sewer Bell up 2ft long 2' 6" North of Line B-D.
- 'D' Stone in grade Center of Road on Line with fence East.
- 'E' Found old stone in grade on Line with fence running East.
- 'H' 33' south + 33' East of Fence on Line.
- 'I' Old oak fence post 33' W. [Stone Tack in tel pole SE 283'; Tack in fence post SW 415' FA March 1934]
- 'X' Stones. J.W. Woolstencroft.

Oct 2, 1929

- 'C' Could not find sewer pipe Placed stone 2 1/2' North of Line B-D on Line with fence sec 26
- 'D' Found old Cor. stake oak + placed casting over the top casting about 5" long with 2 1/2" hole about 3/4" wall + placed stone on top of casting + stake. ; R.P. Fence Cor. NE 415' ; F. Cor. S.E. 408' ; F. Cor NW 360' ; R.P. West End of Colvert 233'

1936 - July

- ~~'E' Concrete Stone Tack in tel pole NW 76.2 R.P. Tack in light pole S.W. 92.7~~
- 'I' "Concrete Stone" R.P. Tack in cor fence post East 34.3 R.P. Tack in light pole S.W. 92.1
- 'B' "Concrete Stone" R.P. Tack in tel pole NW 58.0' ; R.P. Tack in Cor fence post SW 47.5'
- 'B' Iron pin in bituminous surface center of intersection
- 'C' Located stone, placed iron pin: R.P. N&C. P.P. NW - 54.50' ; R.P. N&C. TP SW - 53.20'
- 'D' Located stone: R.P. N&C. Sign post SW - 62.96' ; N&C. TP SE - 60.71' ; R.P. N&C. P.P. NW - 58.80' , Nov. 1969 J.L. Sorenson


26  
27

SURVEY No. 20

Section 26

Town 10<sup>th</sup>

Range 40

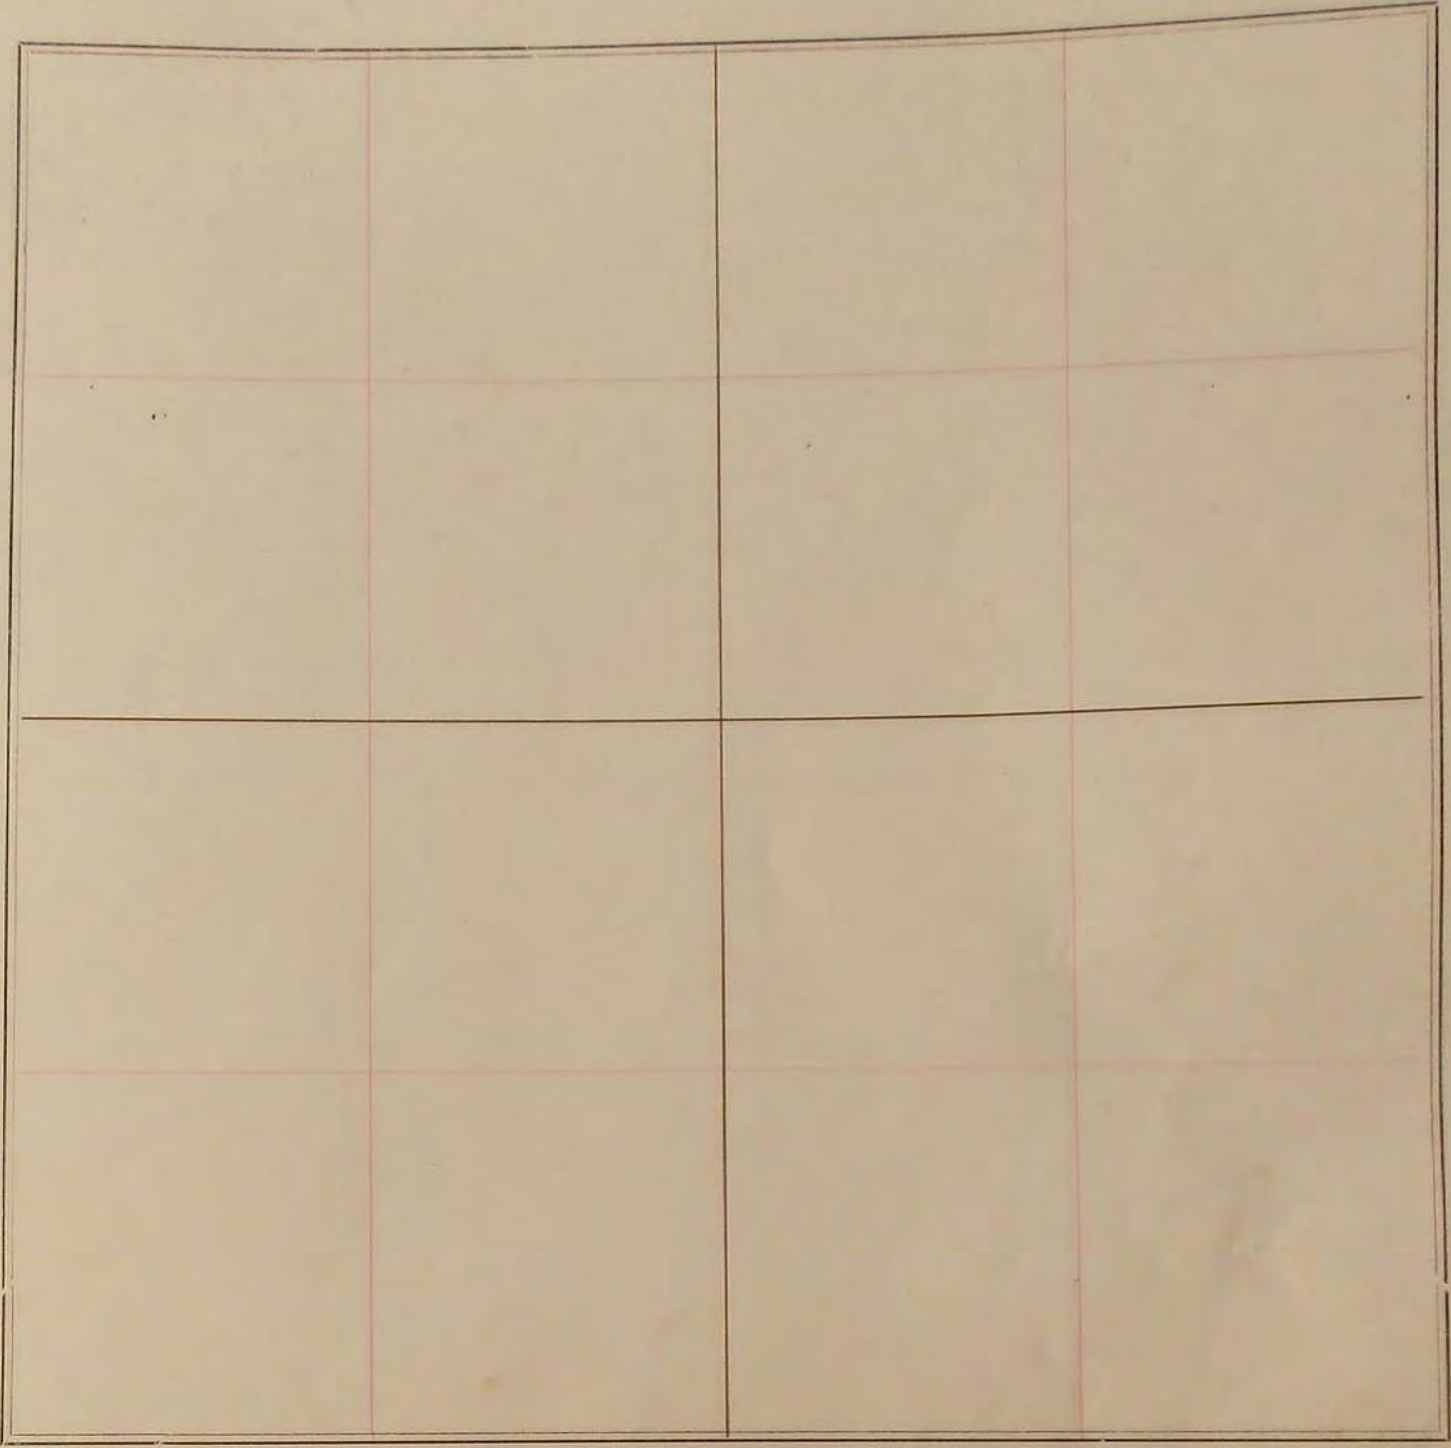

FIELD NOTES.

Found the center of Sect. 26. 10<sup>th</sup>. 40 and set a stake thereat.

Section 26 Town 10<sup>5</sup> Range 4B



FIELD NOTES.

June 7, 1922.

- A Fence post in corner
- B 33' E +  $\frac{1}{2}$  N. of fence on Sec. 27 which was located by me when original corners were there.
- C 6" sewer pipe, bell up, about 2' long. broken pieces in center of tile, 2.5" north of line B-D
- D Stone in grade, equidistant and on line between E. & and F.E. Sec. 23.
- E Found old stone in grade on line with fence running east.
- F
- G
- H 33' S + 33' E. of fence on Sec. 27 see B.
- I Old oak fence post 33' W. Sec B.
- X Stones.

J.W. Woolstenhult  
Co. Surveyor.

Oct. 2, 1929

- C. could not find old sewer pipe placed stone 2 1/2' north of line B-D. on line with fence, with
- D. found old corner stake oak and placed casting over the top of same, casting about 5" high with 2 1/2" hole about 3/4" wide, and placed stone on top of casting and stake. Reference marker on trap flat back.