


SURVEYOR'S RECORD

Section 28

Township 108

Range 40

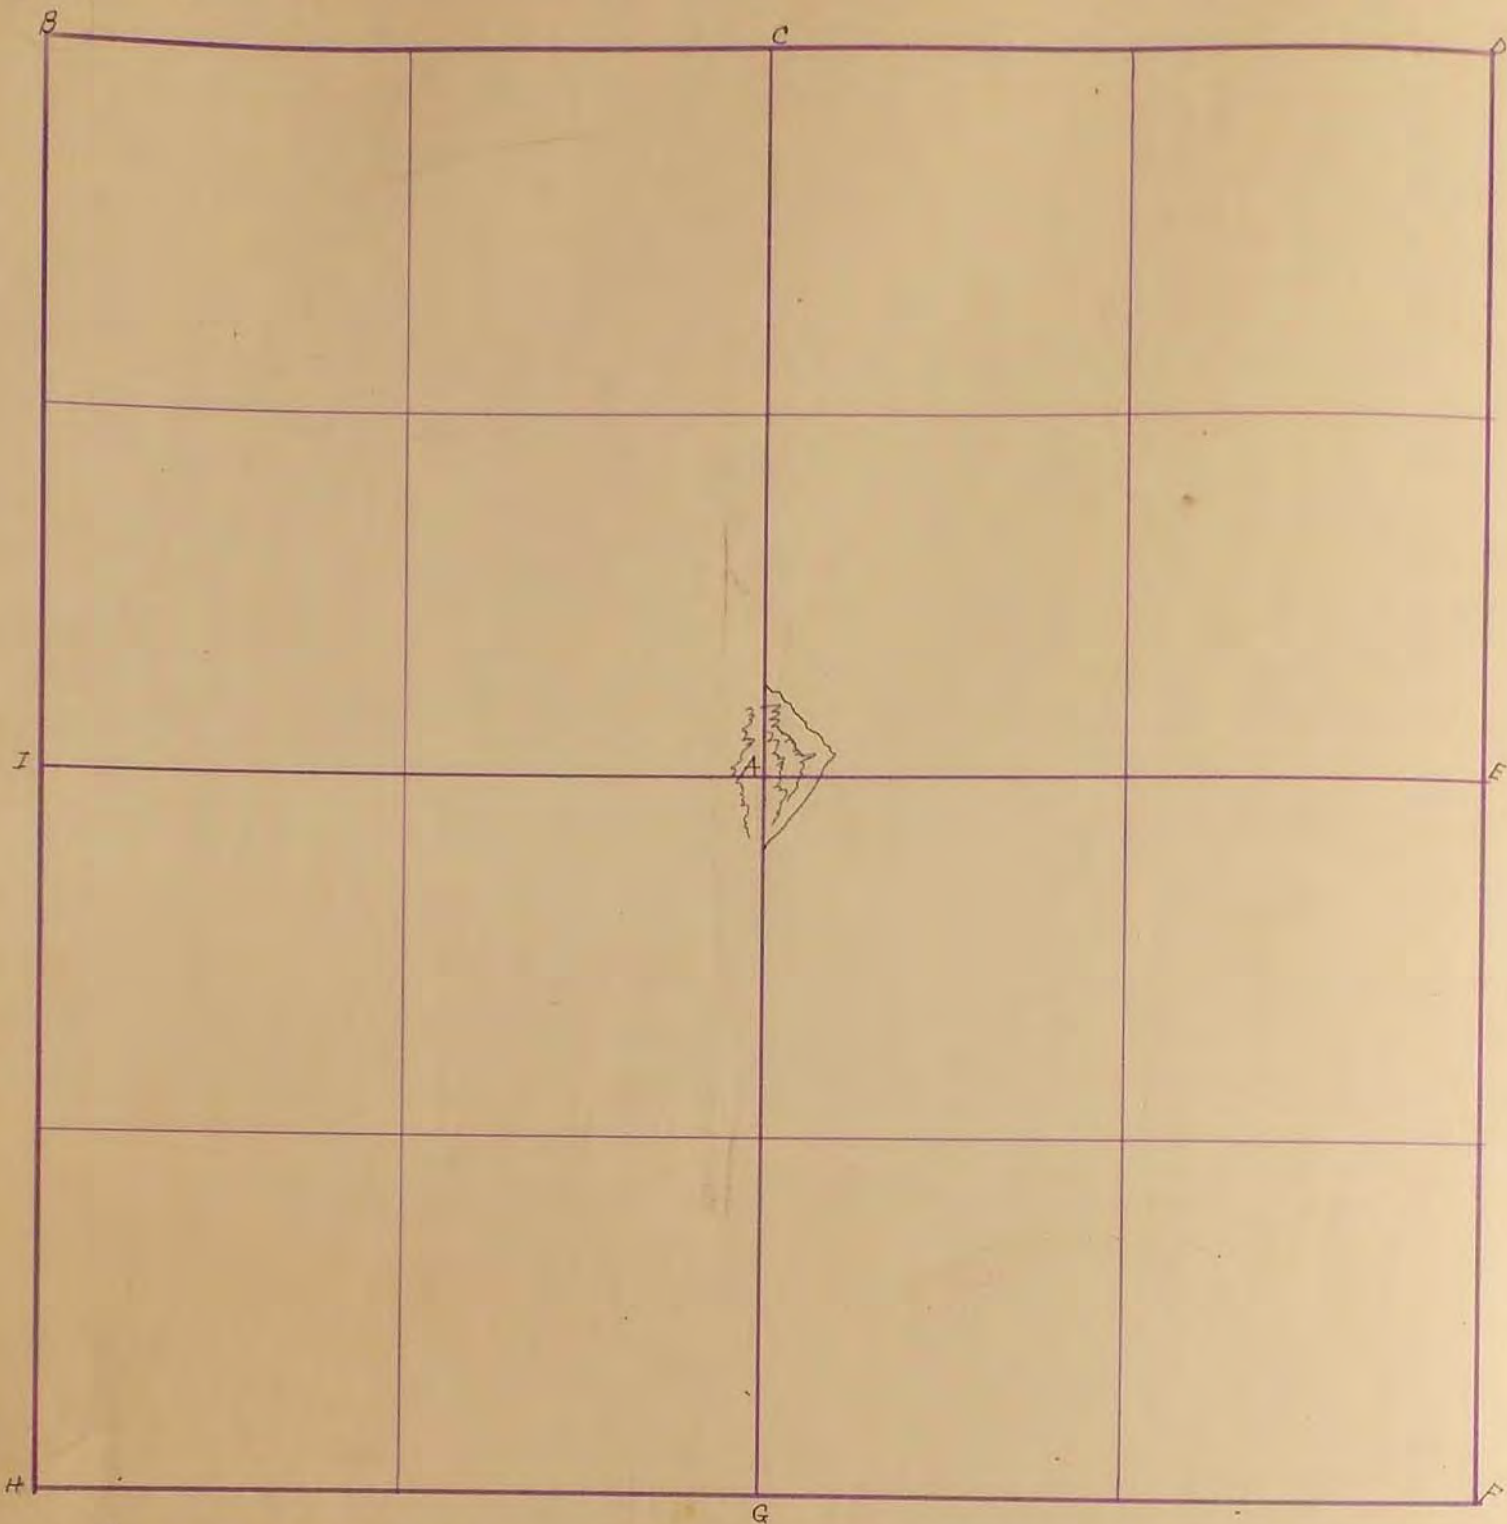

Found the center of sect. 28-108-40. and set a stone thereat and divided the SE 1/4 into S 1/2 and N 1/2 Survey 73 Surveyed road north on quarter line through sect. 28 with variation on account of slough as marked

"A" Stone

"C" Stone L.P. 41.7' East, T.P. 46.5' N.W. - 1952 (M.E. Koopman)

"G" Stone Tack in cor fence post SW 43.2; R.P. Tack in cor fence post SE 46.8; R.P. Tack in light pole SW 40.2

"B" Stone Tack in cor fence post south 19.2; R.P. Tack in fence post SE 33.2 "Stone with Glass Nails" F.R. March 1934

"F" Concrete Stone R.P. Edge of Steel Cor post North on Line 48.2

R.P. Tack in Box Elder NE 55.2; R.P. Tack in Light pole NW 37.6

"G" Concrete Stone R.P. Tack in Cor. fence post SW 54.2; R.P. Tack in Cor. fence post SE 47.2
R.P. bottle cap in brace pole SE 45.2
 R.P. bottle cap in power pole SW 55.2
 1956

"B" Stone + on top S.C.P. 27.8', R.P. Galv. roofing nail in bottom of post

T.P. - NE 33.9' R.P. Galv. roofing nail in bottom of post. 1952 M.E. Koopman

"G" Conc. Stone R.P. N. & C. in P.P. 52.05' NE, N. & C. in T.C.T. 50.20' S.E.,

N. & C. in P.P. 60.18' S.W. - July 19, 1972

28
29


1940

SURVEY No. 12

Section 28

Town 108

Range 40

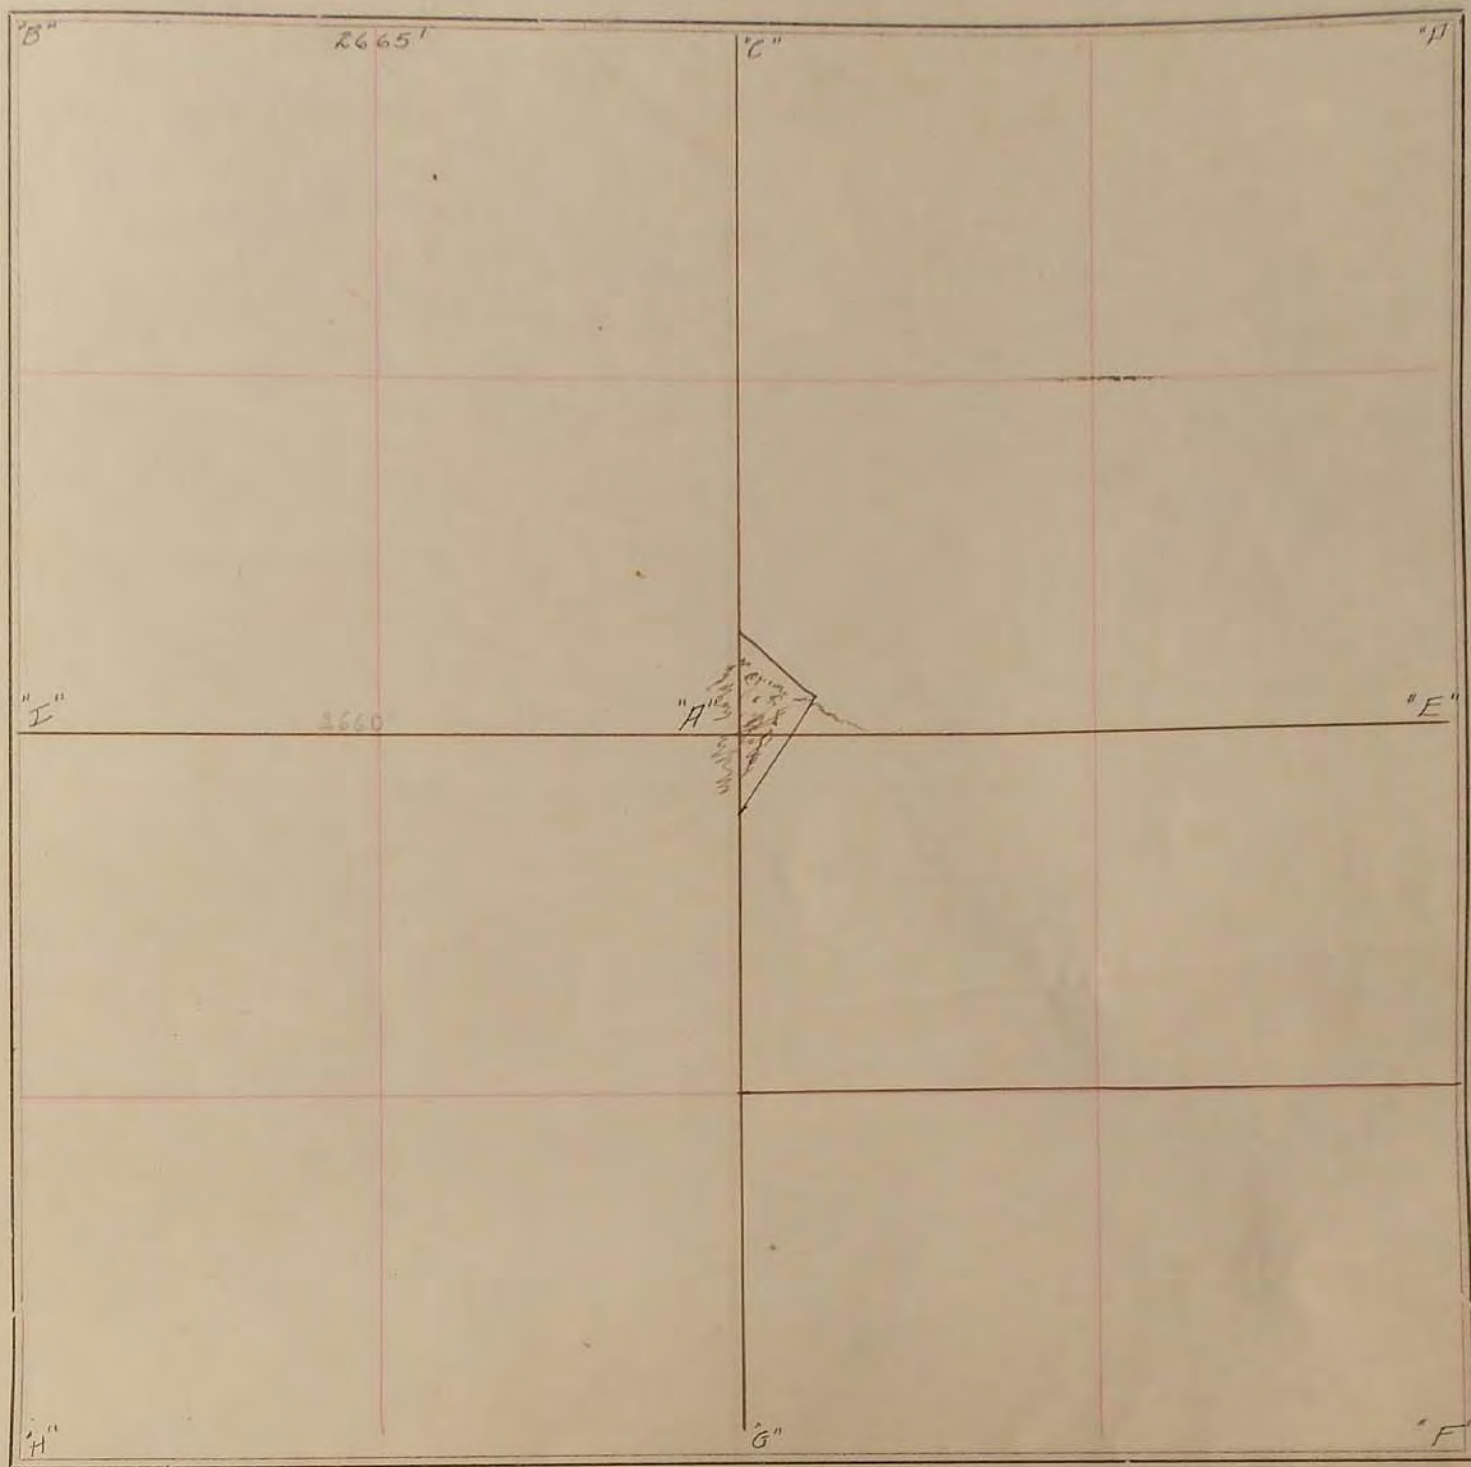

FIELD NOTES.

Found the center of sect. 28. T. 108. R. 40. and set a stake thereat, and divided the SE 1/4 into S 1/2 and E 1/2
 Survey 23. Surveyed road north on quarter line through section 28, with variation on account of slope as marked

"A" Stone

"C" Stone + L.P. 41.7' East T.P. 46.5 N.W. - 1952 M.E. Koopman

"G" Stone Tack in Cor. fence post SW. 430' : R.P. Tack in Cor fence post SE. 490'

"B" Stone with glass nails R.P. Tack in Cor fence post south 190' : R.P. Tack in fence post SE. 332' 1934 F.H. March

"B" Stone + on Top S.C.P. 27.8' R.P. Galvanized Roofing Nail in Bottom of Post, T.P. N.E. 38.9' R.P. Galvanized Roofing Nail in Bottom of Post. June 16-1952 M.E. Koopman.