


SURVEYOR'S RECORD

Section 28

Township 108

Range 41

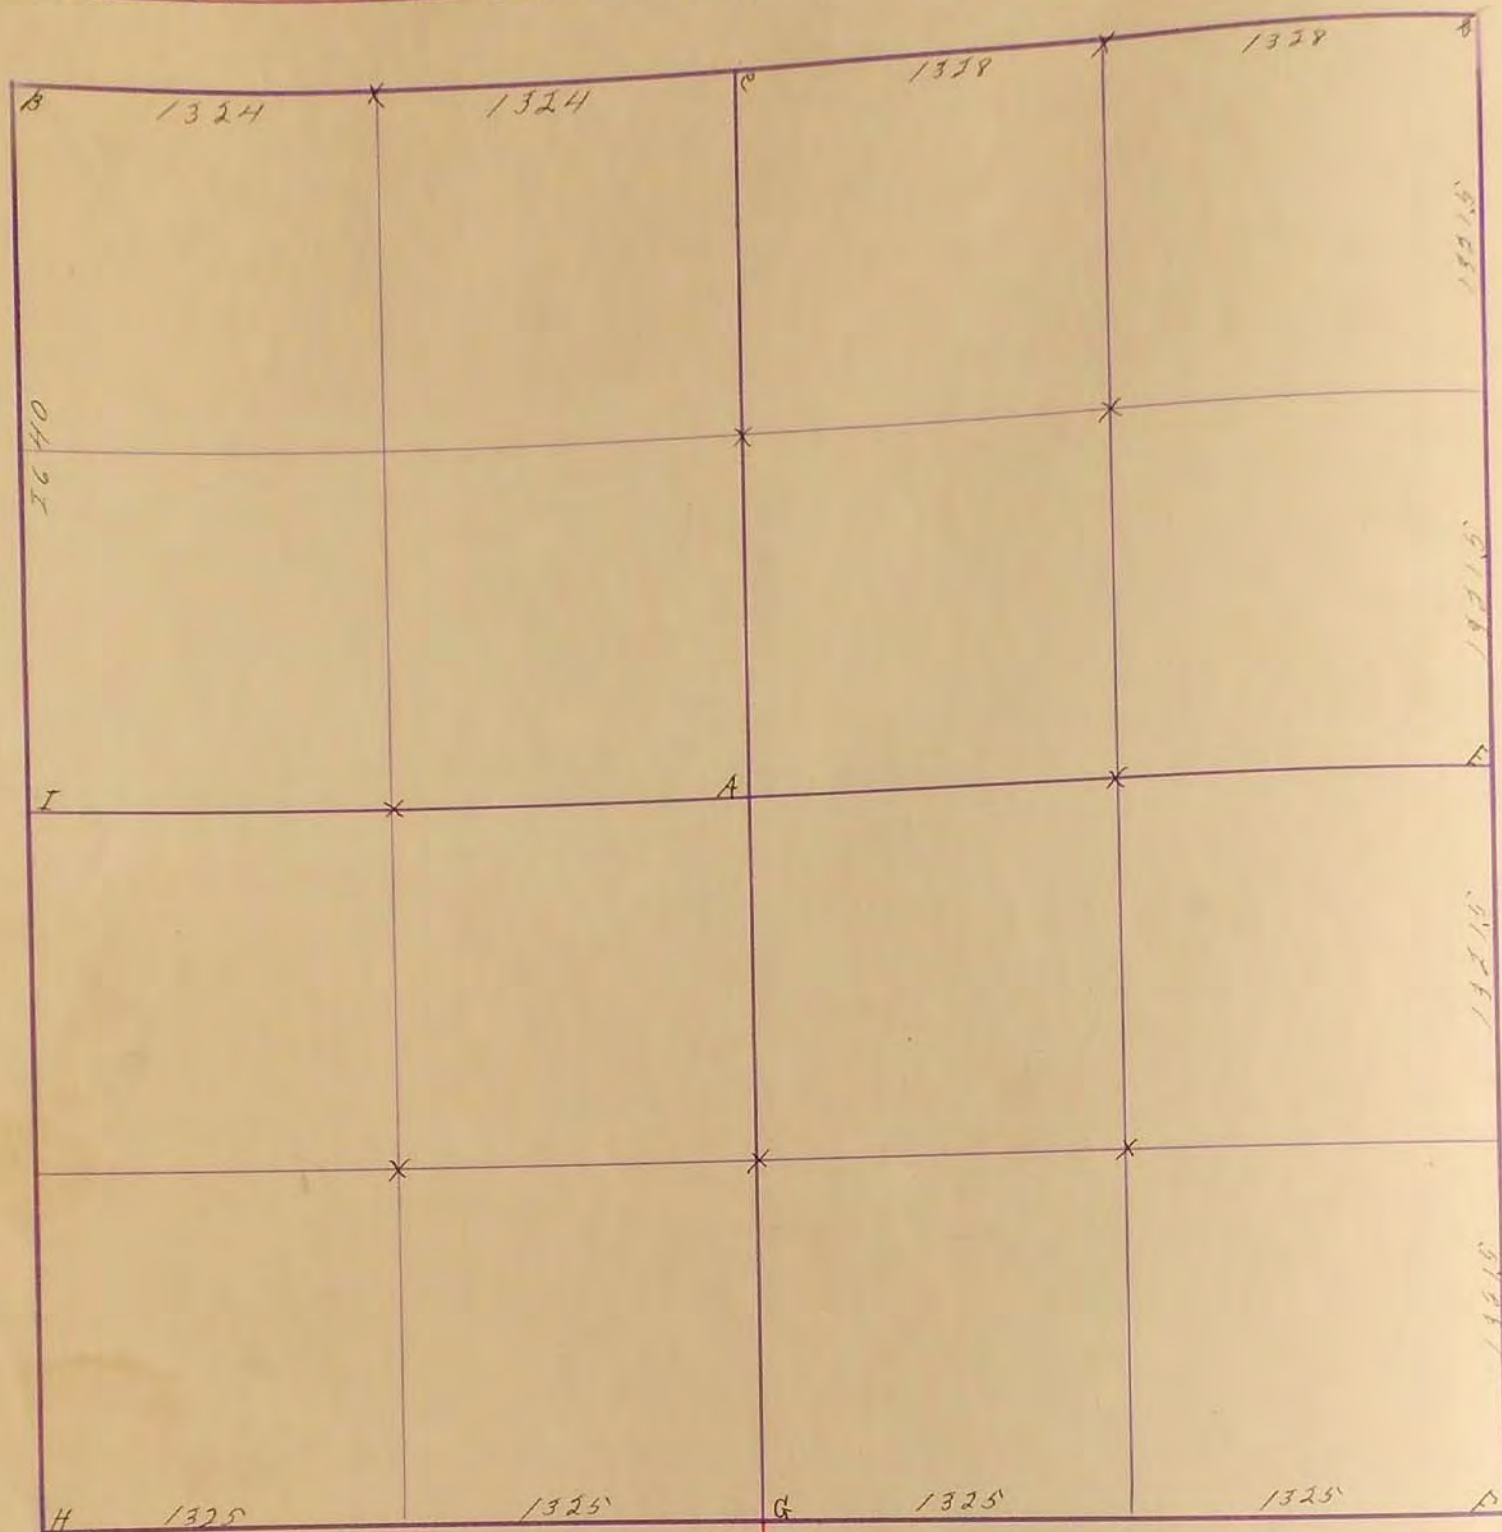

June 4-1907

Cor. corner C.D. H.S.

Arizans survey 74.

Established B.E. X.A.

Stone on all corners except B. Old wagon skin at B.

and small stone mound 38 ft. north east of

fence post on N.E. Cor. of 29

J.H. Hoolstine roof

"C" "Stone": R.P. Tack in fence cor. South on line 33.5'; R.P.

Tack intel pole N.W. 40.5'

"D" "Stone": R.P. Tack in cor. fence post SW. 45.5'; R.P. Tack

in fence cor. North 34' cor. post 6' east of stone; R.P. Tack in

Blazed Cottonwood Tree S.E. 49.3'

"Q" Located field stone 0.3' below gravel surface, April 7, 1910; R.P., N&C,

corner fence post south 34.3'; R.P., N&C, P.P., N.E. 34.95'

"D" Located field stone 1.8' below gravel surface, April 7, 1910; Placed

3/4" x 12" bolt above center of stone; R.P., N&C, P.P., N.E. 45.6'; R.P., N&C,

brace post N.W. 52.1'; R.P., N&C, Cor. Post SW. 38.35'


28
29

SURVEY No. 512

Section 26

Town 103

Range 41

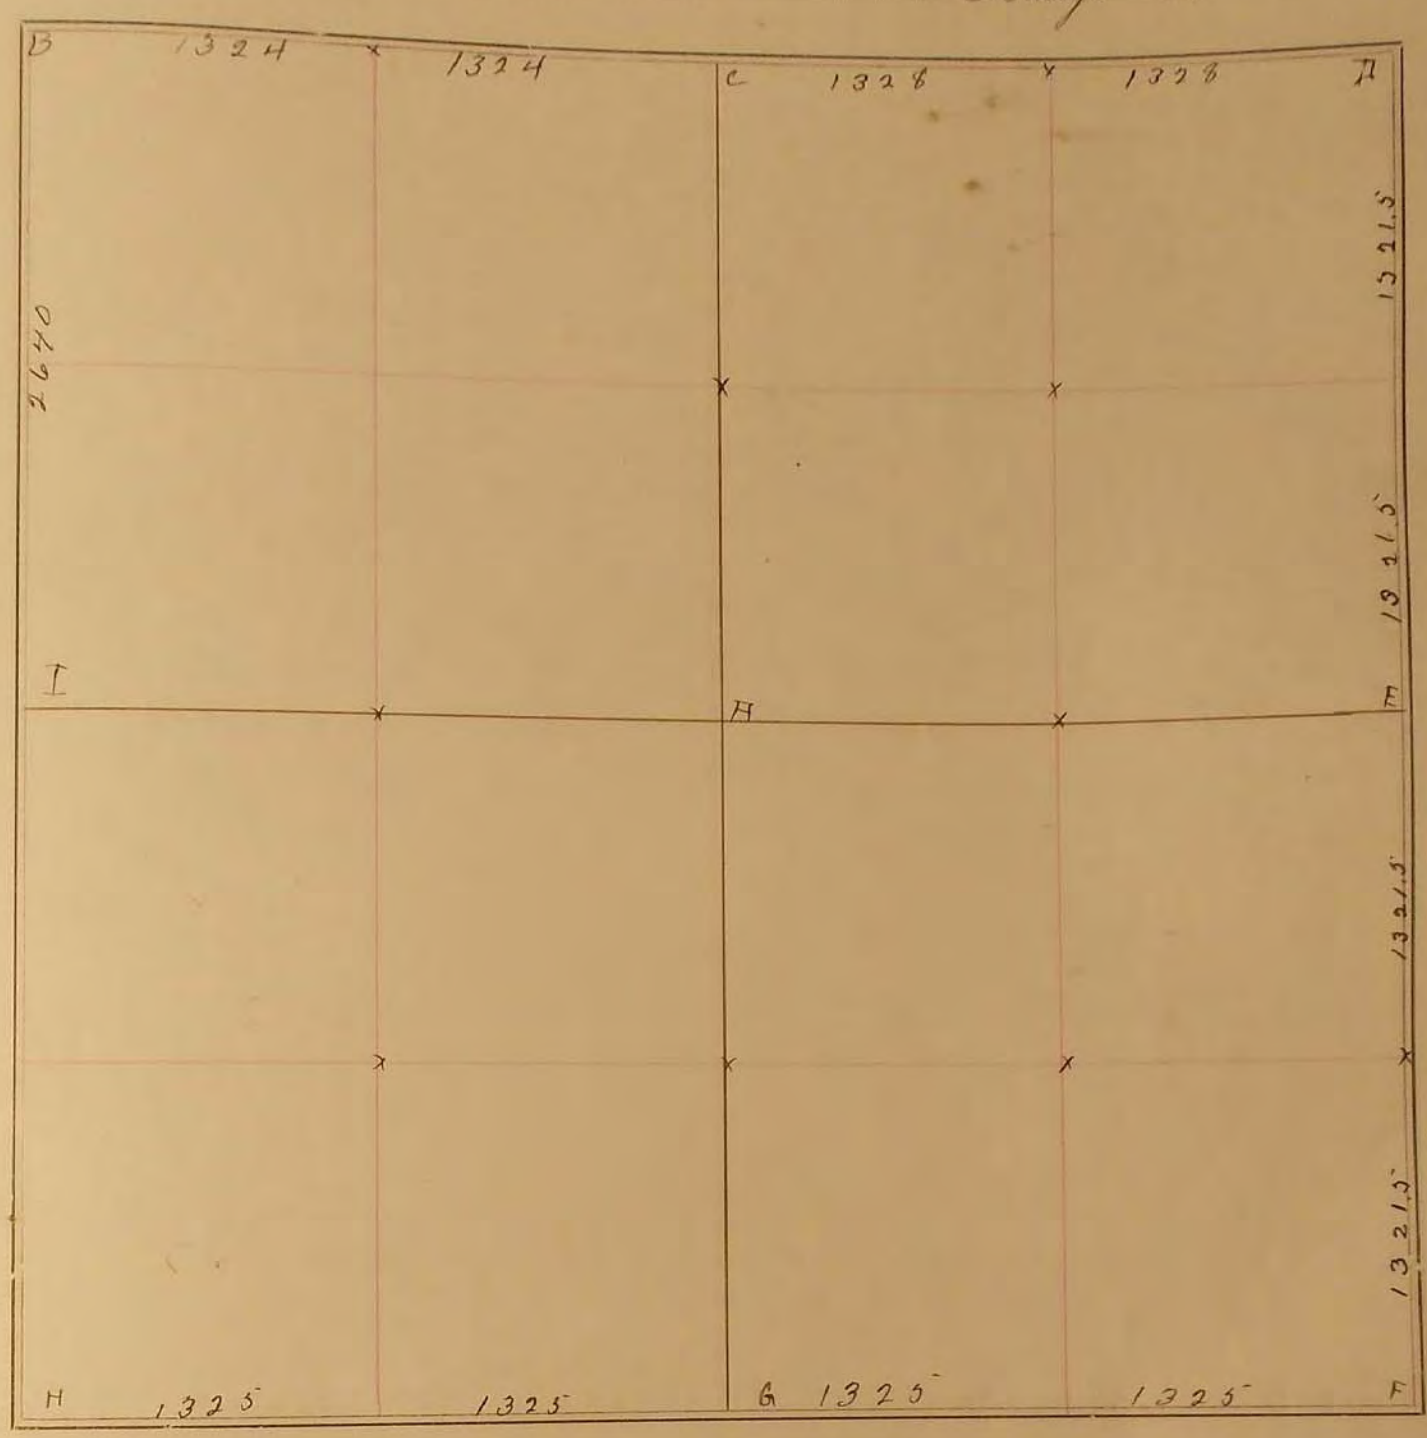

FIELD NOTES.

June, 4, 1907.

Gov. corners, C, D, H, I.
Previous survey F, G.
Established B, E, X, A.

Stones on all corners except, B, old wagon
wheel at B + small stones around. 38 ft north east of fence
post on N.E. cor of 29.

J. W. Woolstenhulme