


# SURVEYOR'S RECORD

Section 30

Township 105

Range 42

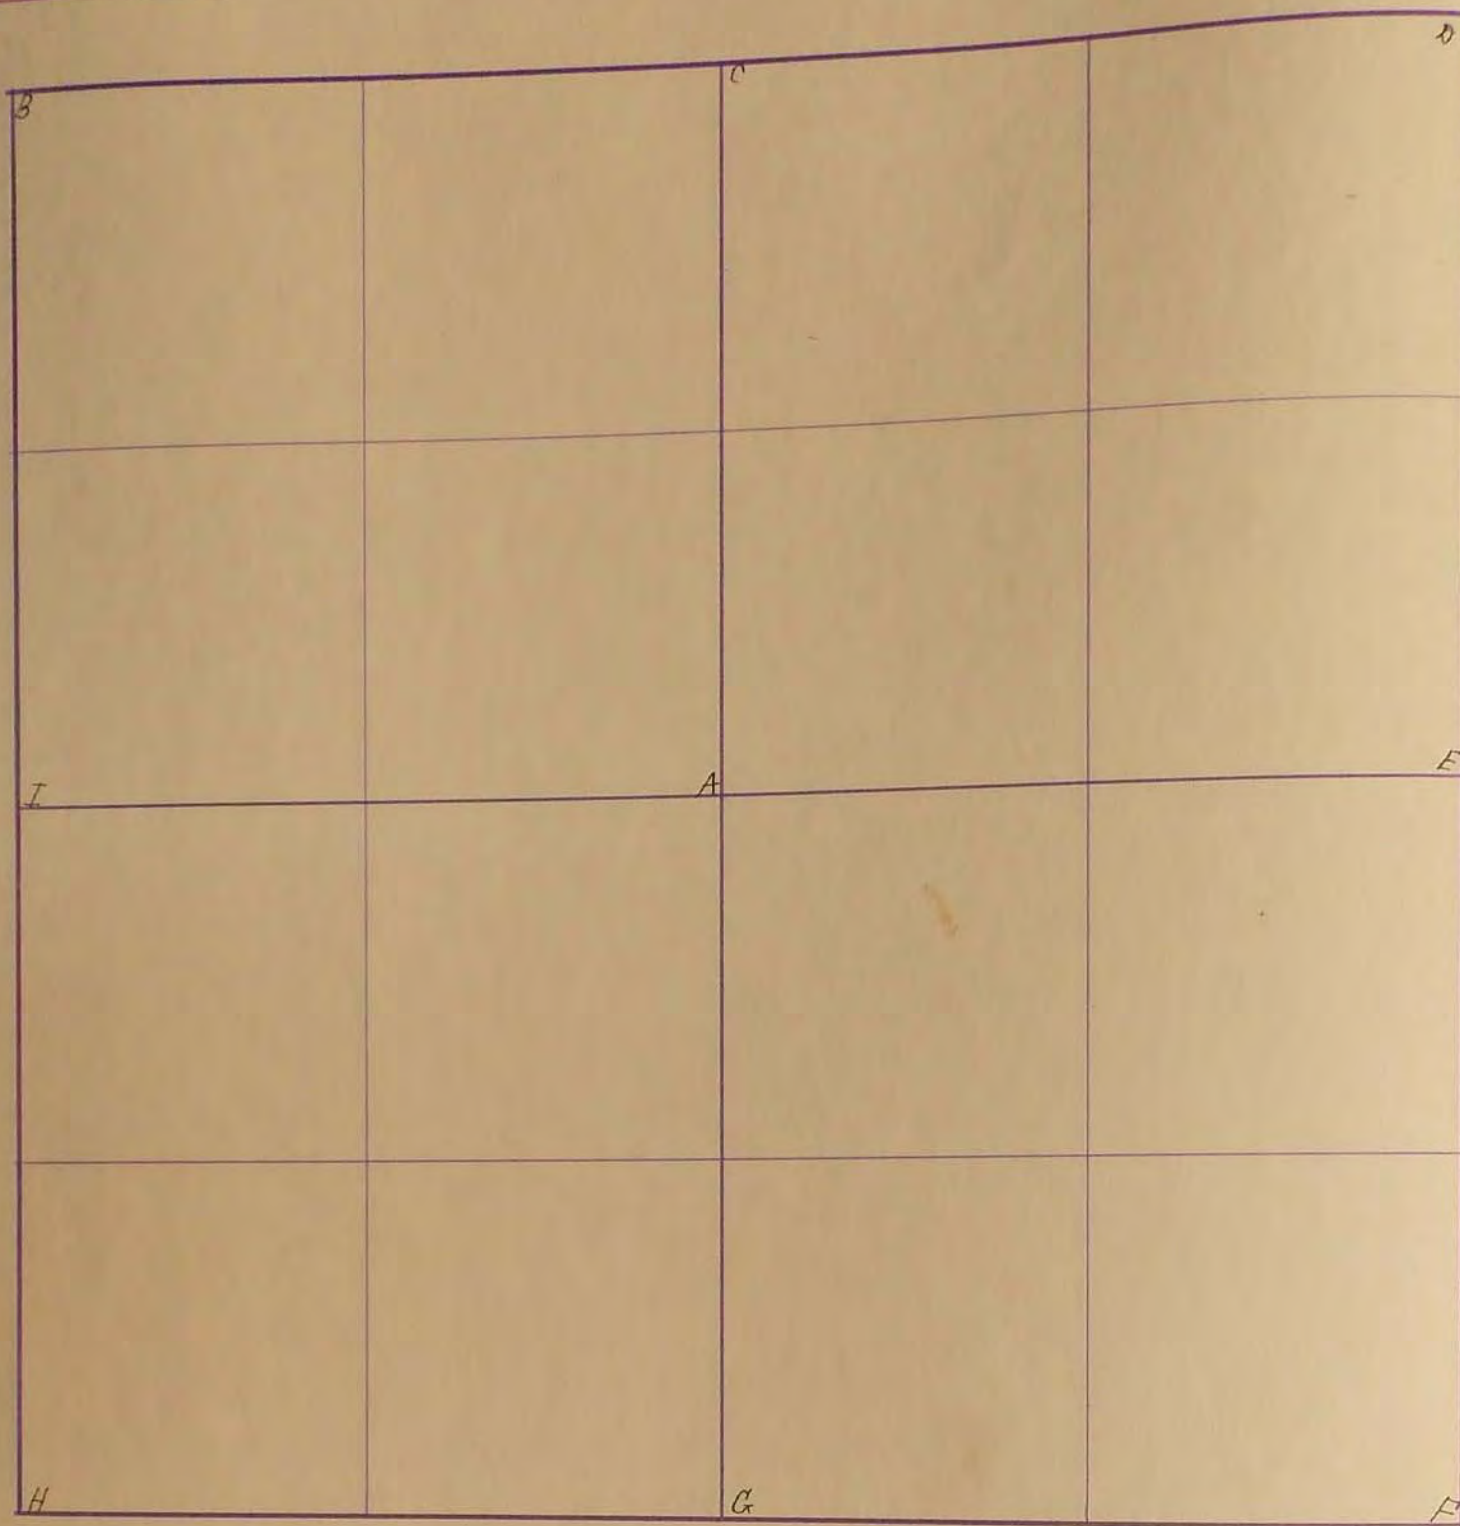

Sept. 19 1977


B. Stone in grade 10X10X18 F. Cor. 45.6' N.E.  
 South end at culvert 65' center of culvert  
 H. Stone in grade F. Cor. 424' N.E. T.P. 38.5' S.E.  
 Fence cor. 45.5' S.W. F. Cor. 45.0' N.W.  
 I. Stone F. Cor. 31.7' E. and 3' 8" South  
 Fence Cor. 33.8' West 3' 8" South

JUNE. 13 1969

"C" placed Iron pin  
 R.P. "X" on Top of Culv. N.W. 39.35' S.W. 39.75'  
 "D" placed Iron pin  
 R.P. "X" on Apron. S.E. 51.15'  
 N.C. Power pole S.W. 60.55'

30  
31

SURVEY No. \_\_\_\_\_

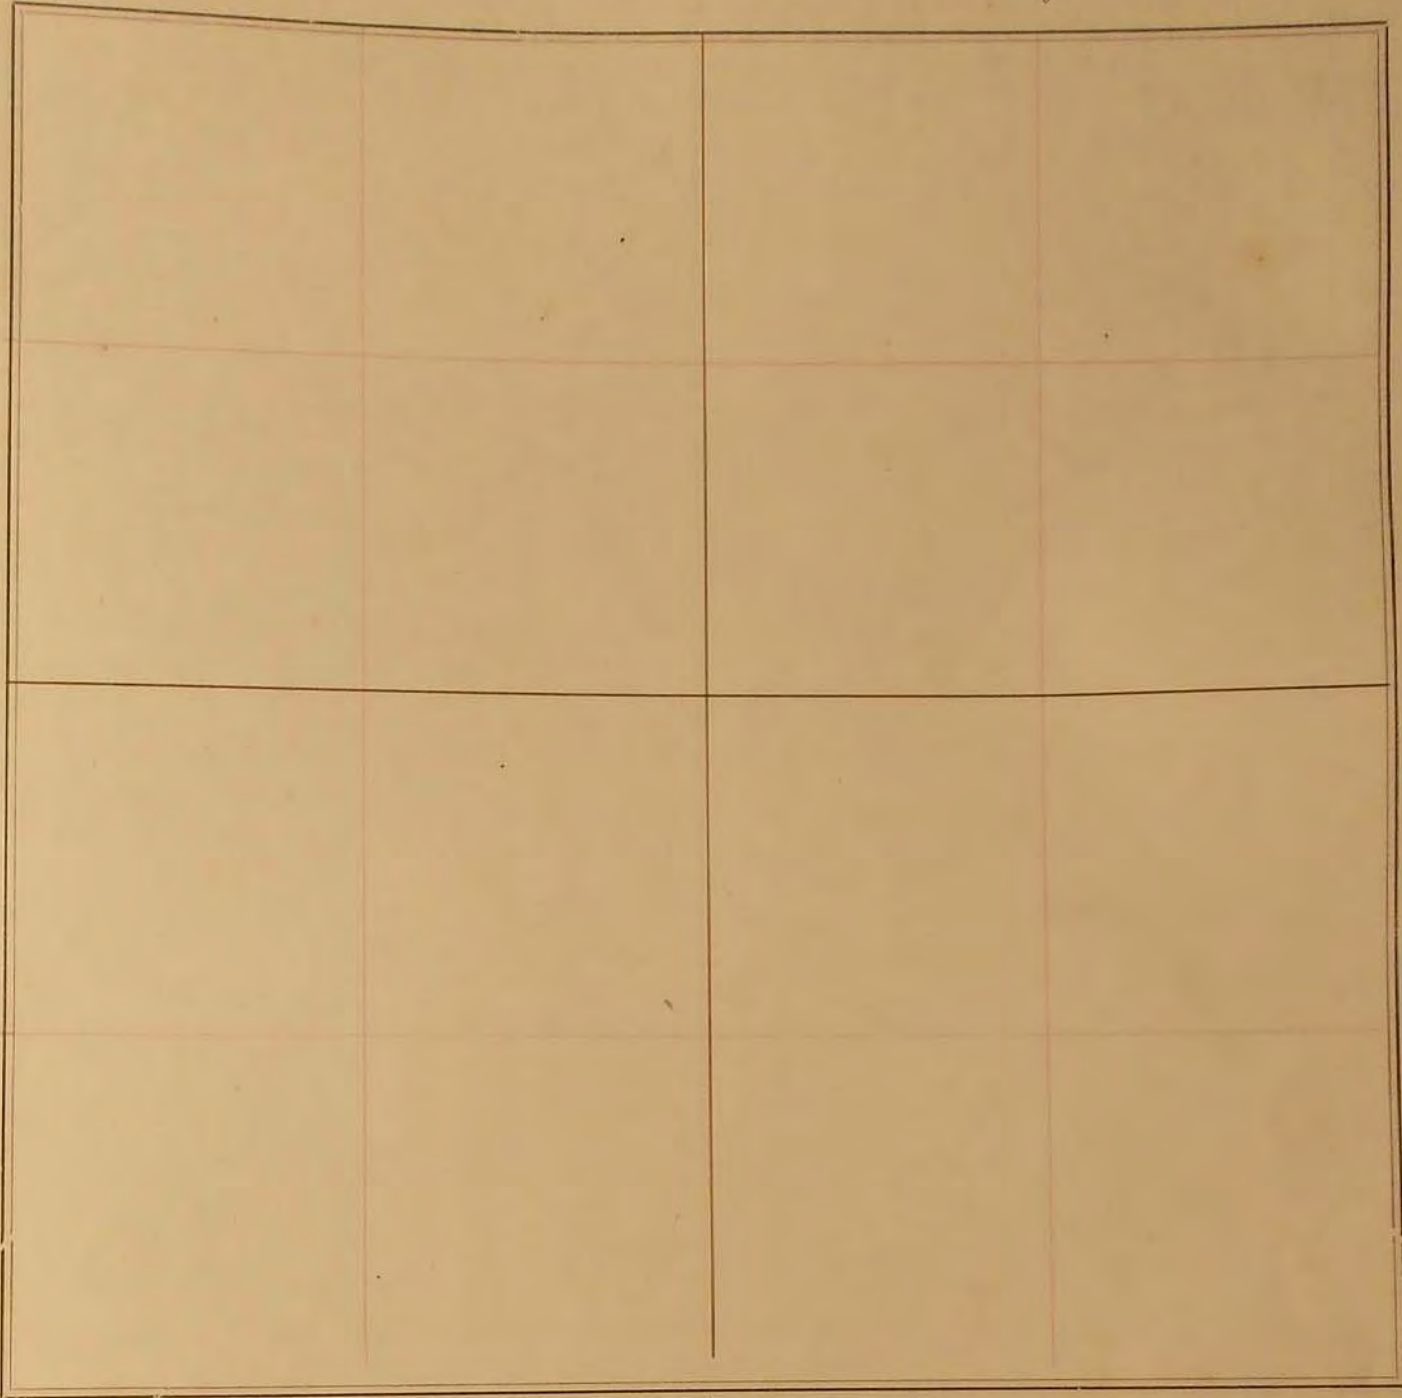Section 30 Town 105 Range 12

## FIELD NOTES.

Sept. 19, 1927

3. Stone in grade 10x10x18 - Elev. 45.6 N.E. South end of culvert 65' center of culvert.

14 Stone in grade. Elev. 42.4 N.E. T.P. 38.5 S.E. Elev. 45.5 S.W. Elev. 45.0 N.W.  
 1 Stone Elev. 31.7 E + 38' South. Elev. 33.8 W + 38' South