


SURVEYOR'S RECORD

Section 32

Township 108

Range 39

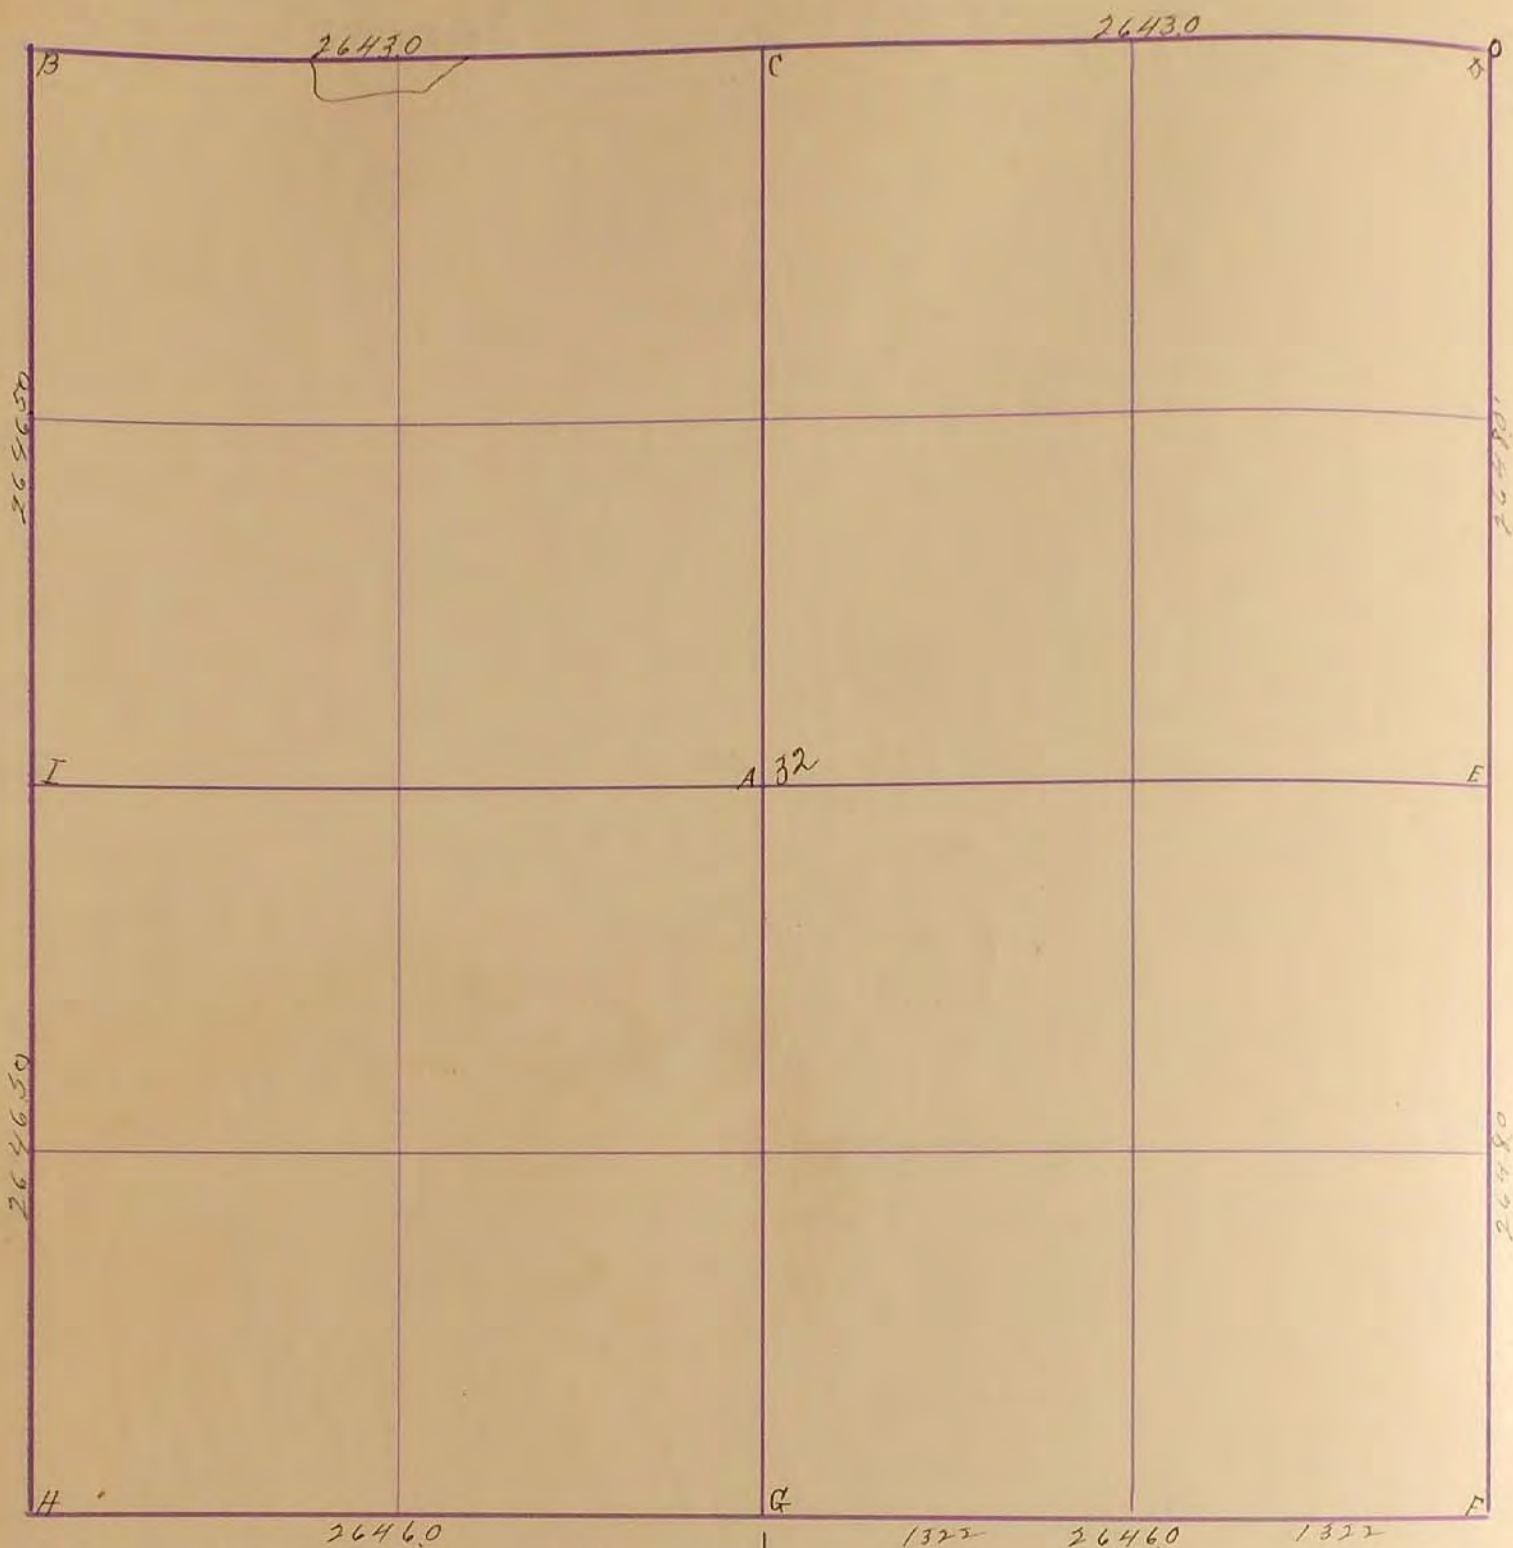

O Indicates Cor. Cor See Page 240

"G" Field Stone RP tack in Gate post North 34.2°

RP tack in blazed fence post SW 44.0°

"F" Concrete Stone RP tack in REA Pole NW 60.2°

RP tack in cor fence post SW 54.6°

"E" Kasota Stone RP tack in brace post SE 57.2°

RP tack in cor post East 48.0°

"K" Kasota Stone RP tack in brace post SE 52.2°

Edge of steel fence post ^{NE} 57.0°

"L" Kasota Stone RP tack in gate post SW 33.2°

RP tack in gate post SE 32.6°. RP tack in REA pole North 30.2°

"D" Dug 6'x6'x6' deep hole with backhoe Nothing. 4-14-78

4-14-78 Del thresh

N4C P.R. S.W. 75.80

N4C Corn. P.W. 48.85


"E" Located original Kasota stone: RP N4C Wood P. N.W. 49.33

32

33

SURVEY No. 1402

Section 32 Town 108 Range 39

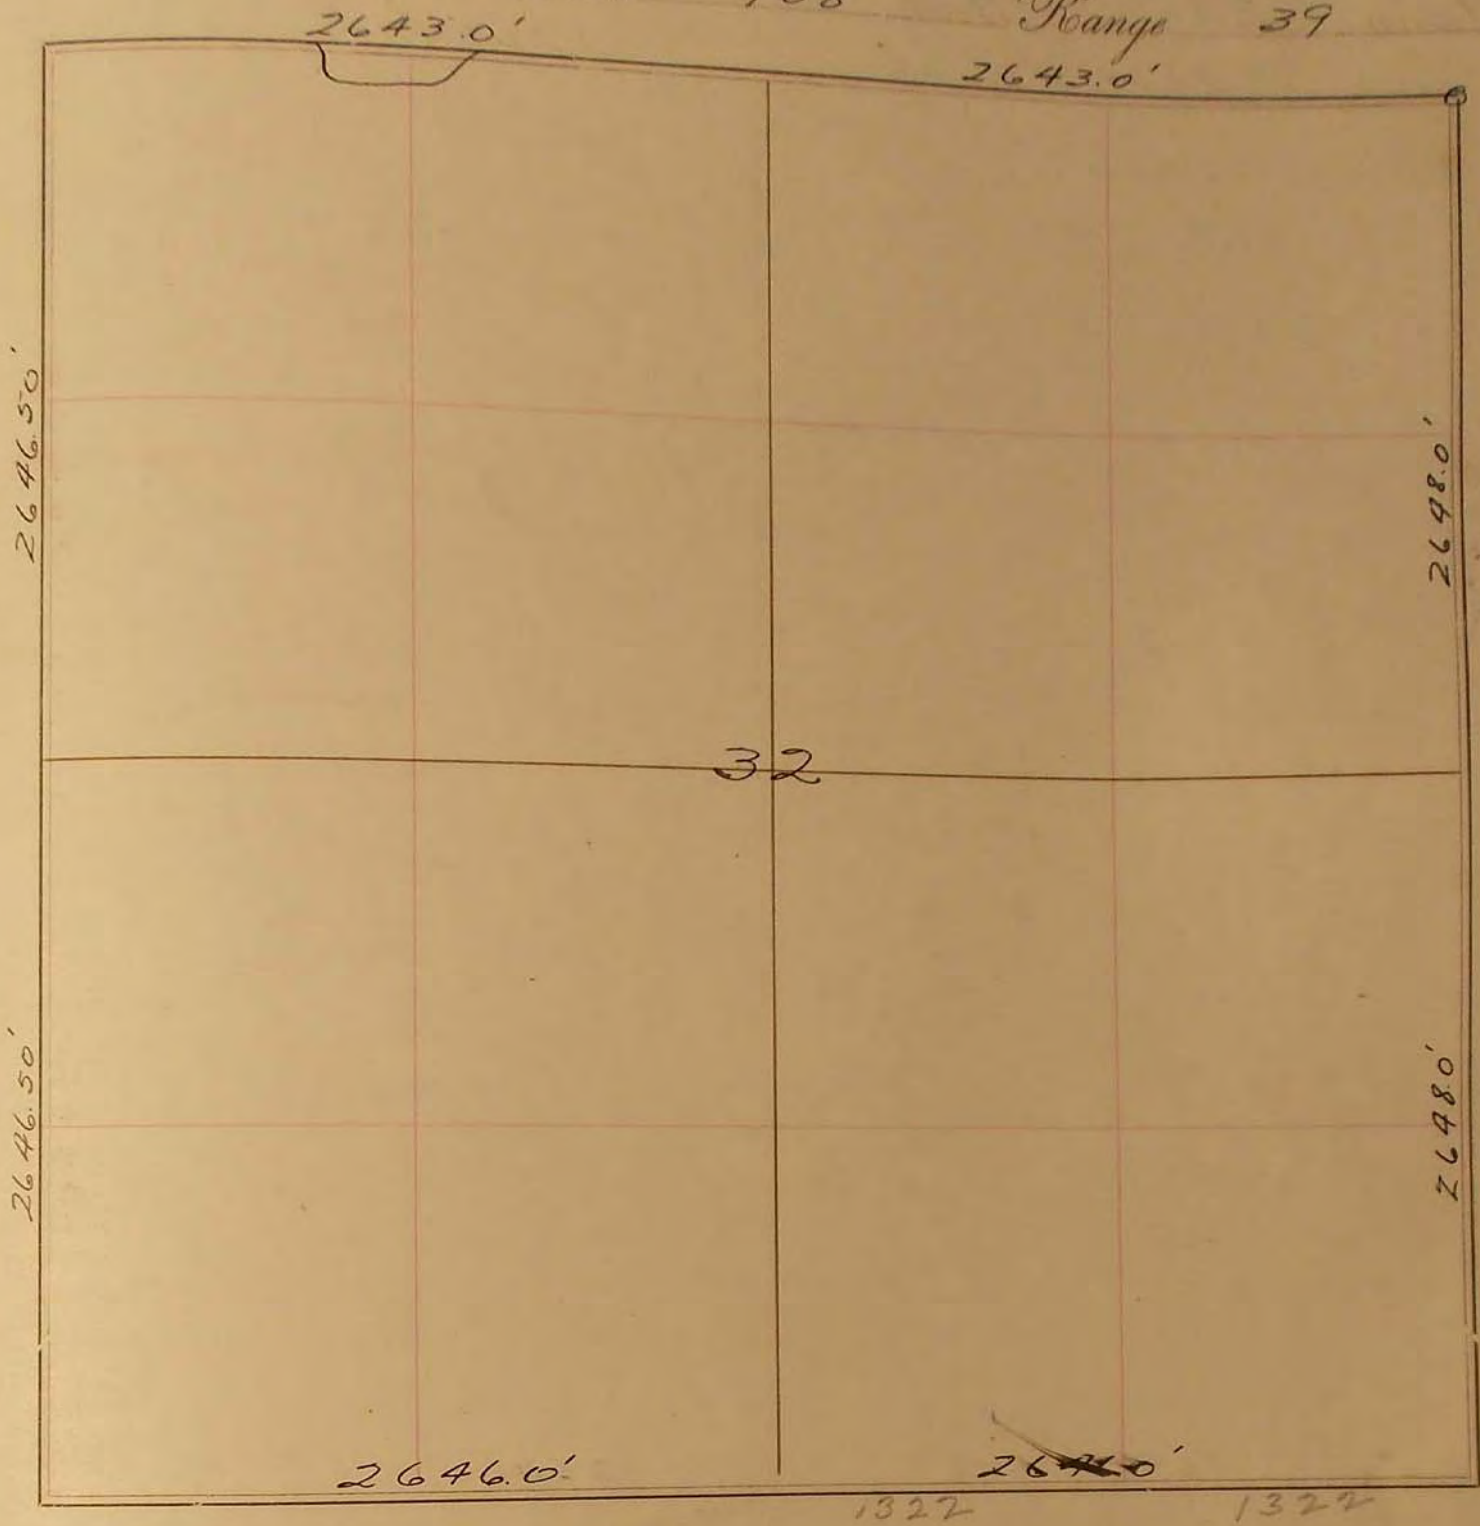

FIELD NOTES.

o indicates Gov't corners.

see pgs 240.