

SURVEYOR'S RECORD


Section 8

Township 10.5

Range 39

89

2648

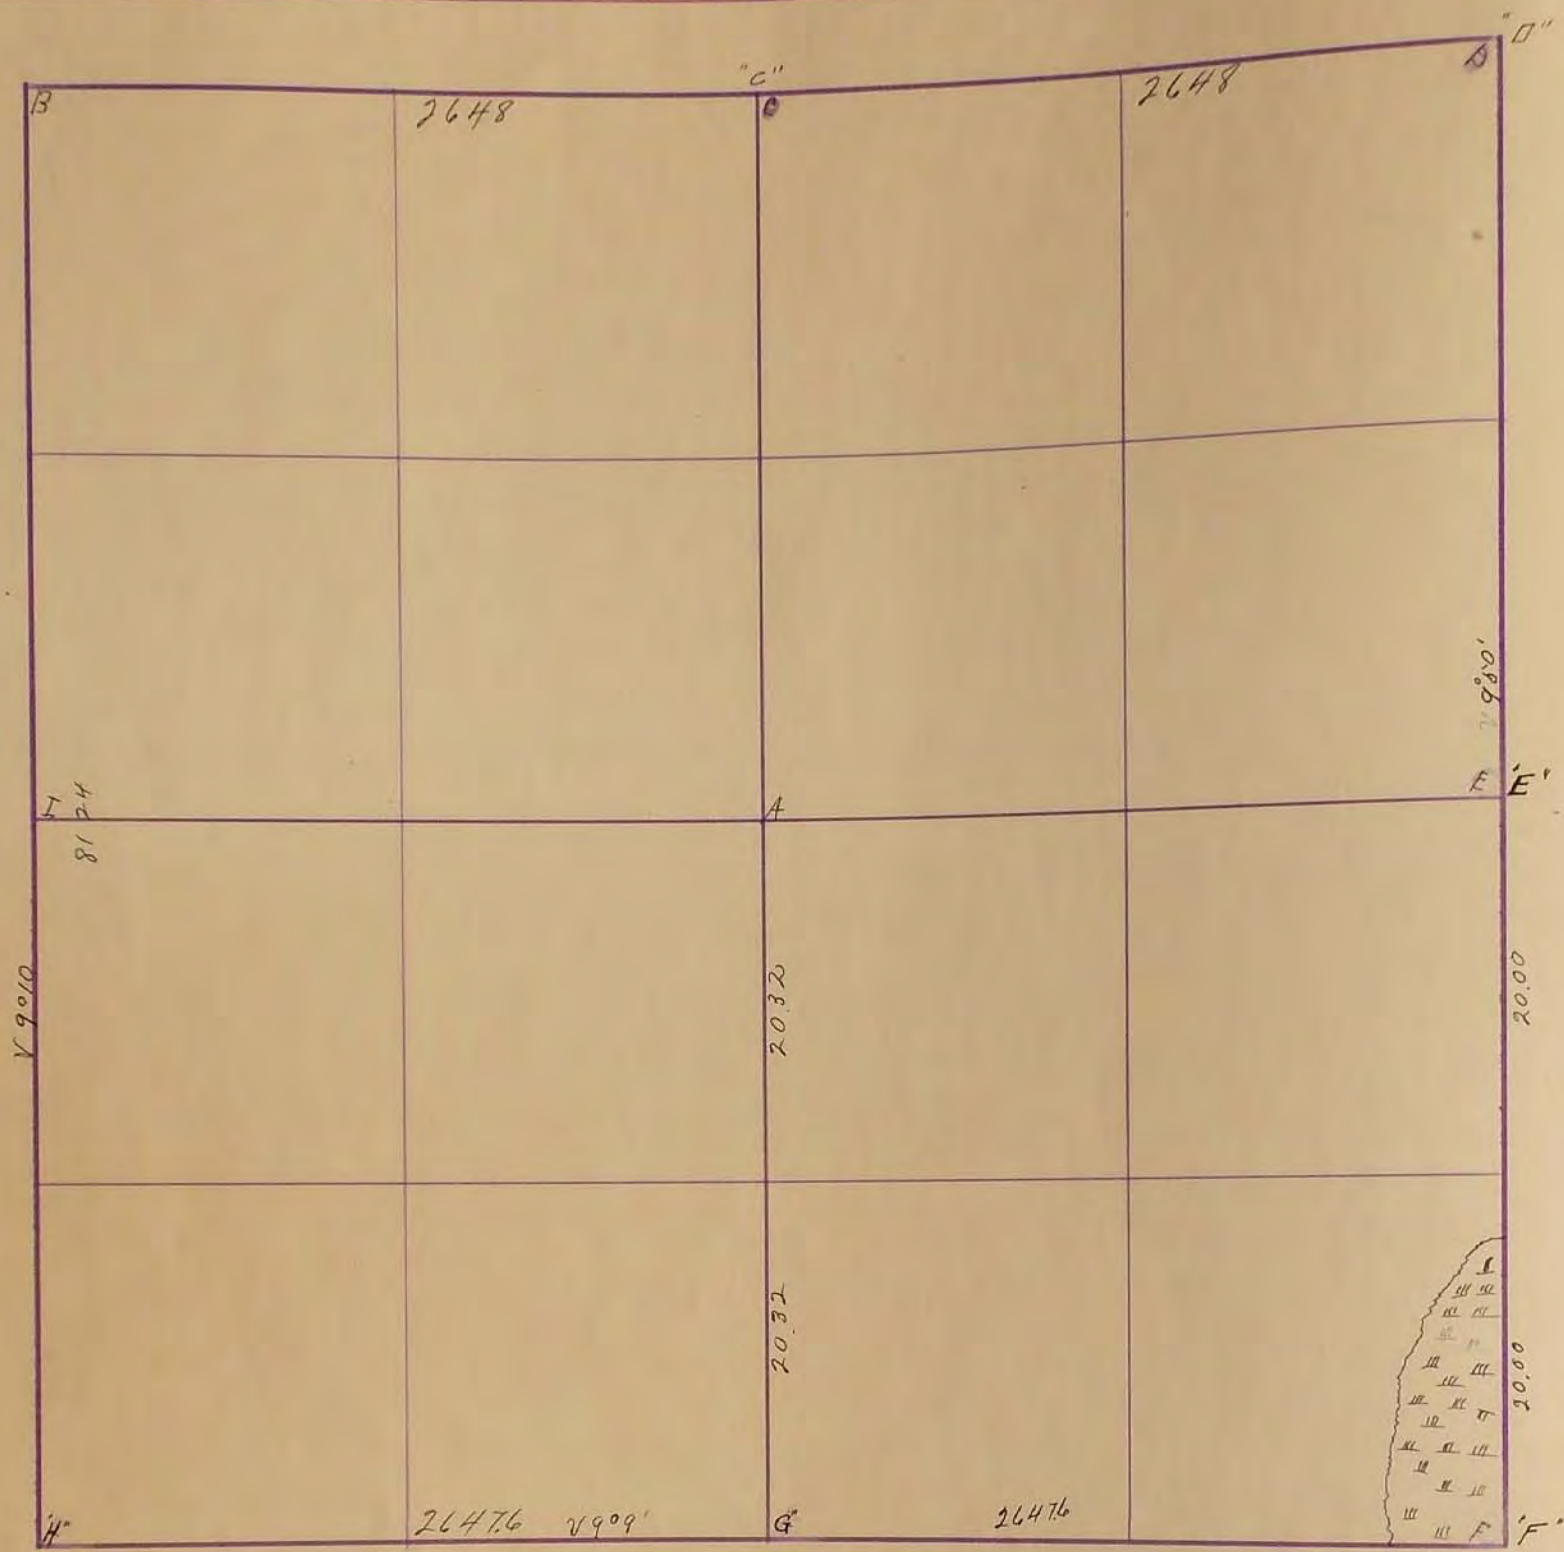

Surveyed July 8-1896

A. Stone and Pits

B. Stone 20' S of culvert. East side of grade stone on top of culvert F. Cor 448 S.E. F. Cor 37.0 S.W. F. Cor 369 N.W. Block

C. Gov mound

("D" continued) R.P., 2x2 hub N.E. 76°; R.P., N&C, P.P., S.W. 73°

D. In slough

E. Stone

F. Gov. mound and Iron stake

J. M. Washlinecraft Deputy

"D" Stone: R.P. Tack in Blazed tel pole S.E. 443'; R.P. Tack in Blazed

Light Pole S.W. 453'

"E" Stone: Edge of concrete post East @ base 314'; R.P. Tack in Blazed fence

post West on line 314'

"B" Concrete Stone: R.P. Tack in Light pole N.W. 454'; R.P. Tack in

Cor. fence post S.W. 482'

"D" Concrete Stone: R.P. Tack in Cor. fence post N.E. 471'; R.P.

Tack in tel. pole S.E. 450'

March 28, 1972 "E" located large field stone 0' below gravel grade

Placed steel fence post above stone "X": R.P., N&C. Cor. Fence Post

East 49°; R.P., N&C. last (3rd) brace post S.E. 57°; R.P., Built

on F.E. Cult. Apron West 57°


"D" Located Conc. monument 1.3' below gravel grade; Placed

12" steel fence post above monument: R.P., N&C. T.P., N.W. 61°;

SURVEY No. 25

Section 5 Town 105 Range 39

2648

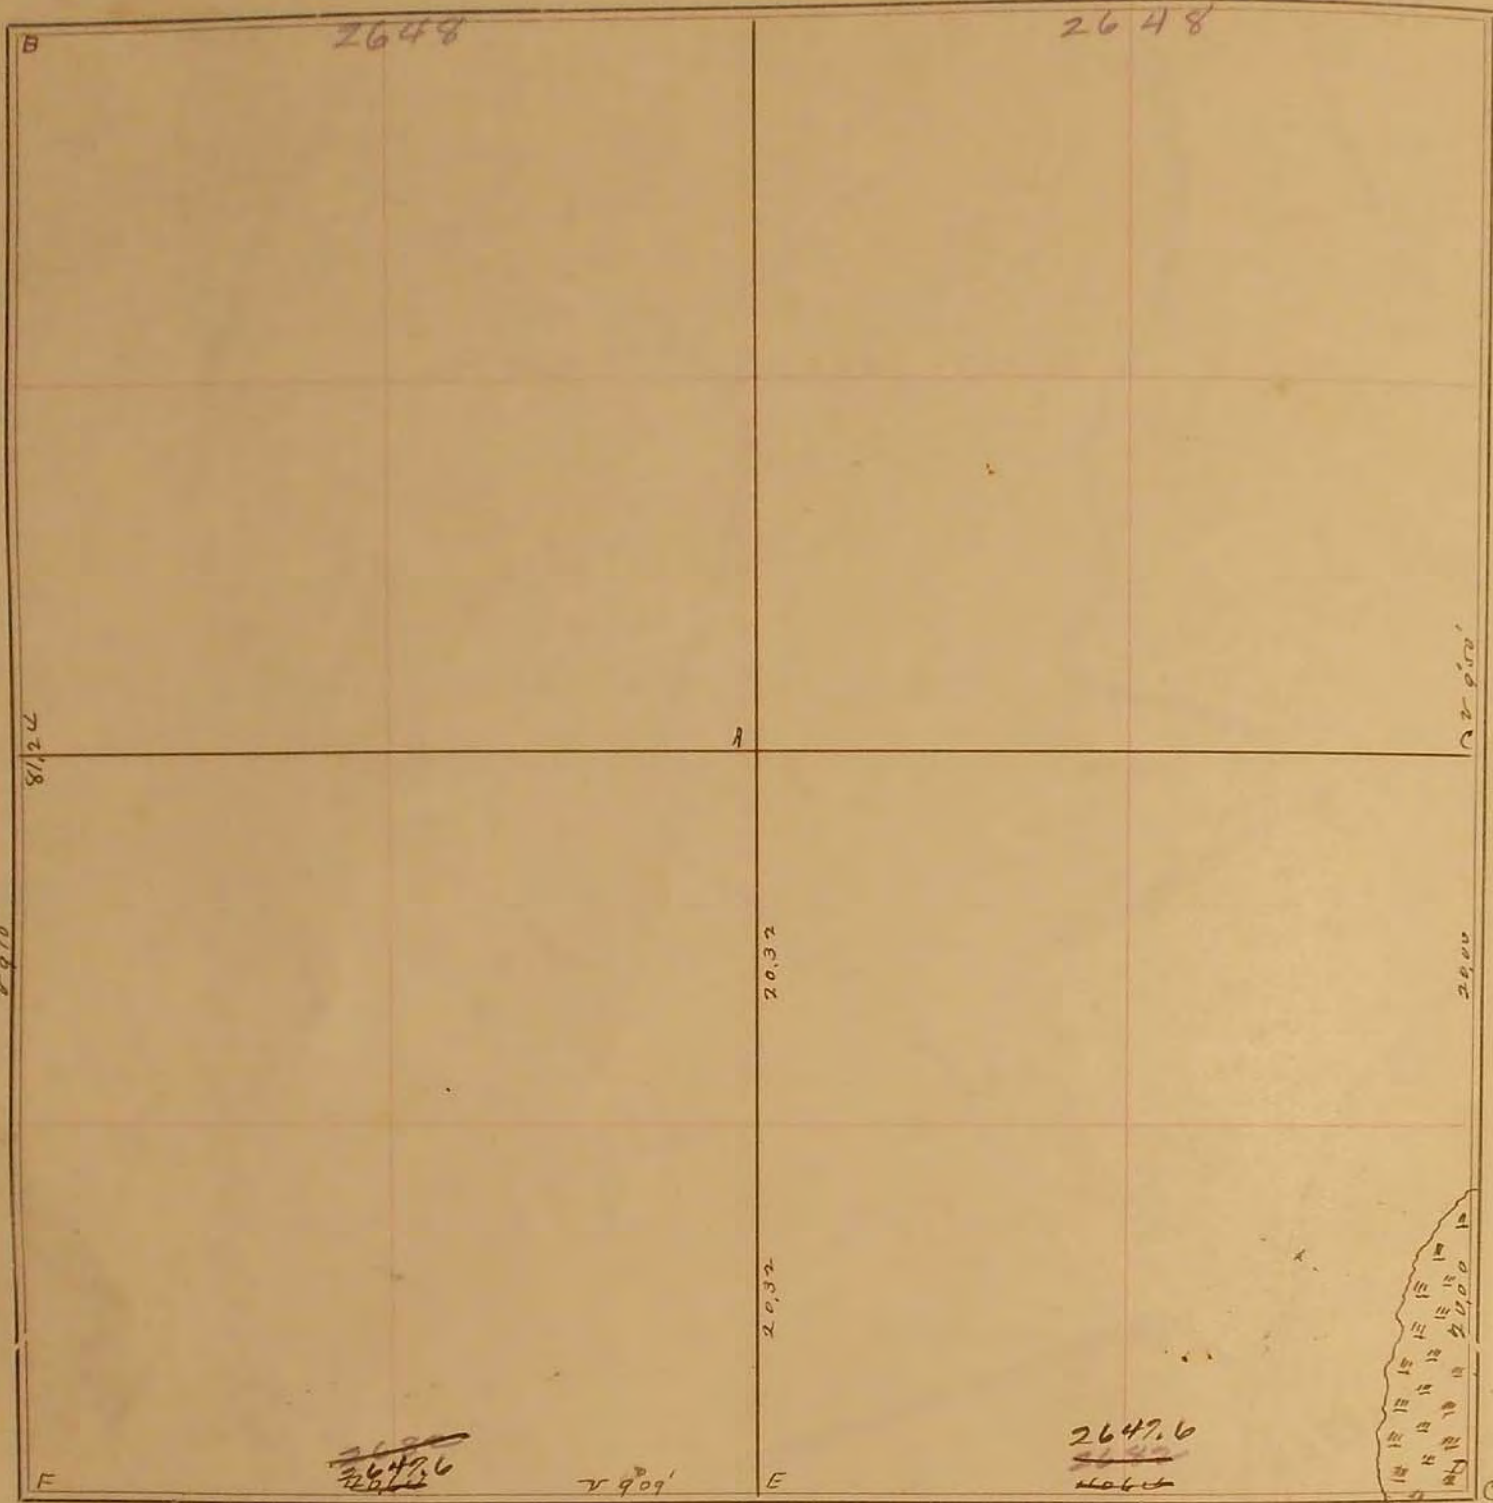

FIELD NOTES.

Surveyed July 8, 1896.

- A Stone and pits
 - B " 20' S. of culvert, east side of grade stone on top of culvert. F. 36446E, F. 3705A, F. 369 12W, E. 36446E
 - C Gr. mound
 - D In slough
 - E Stone
 - F Gr. mound and iron stake
- J.W. Musselman
Deputy