

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER _____ Corner of Section 16, Township 105, Range 43, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On 10-21-2008 found a POINTED FIELD STONE
DATE

left monument as found, lowered monument, removed monument (explain)

On 10-21-2008 placed a 5/8" IRON WITH SEAL #43844 BESIDE STONE.
DATE

SKETCH OF REFERENCE TIES

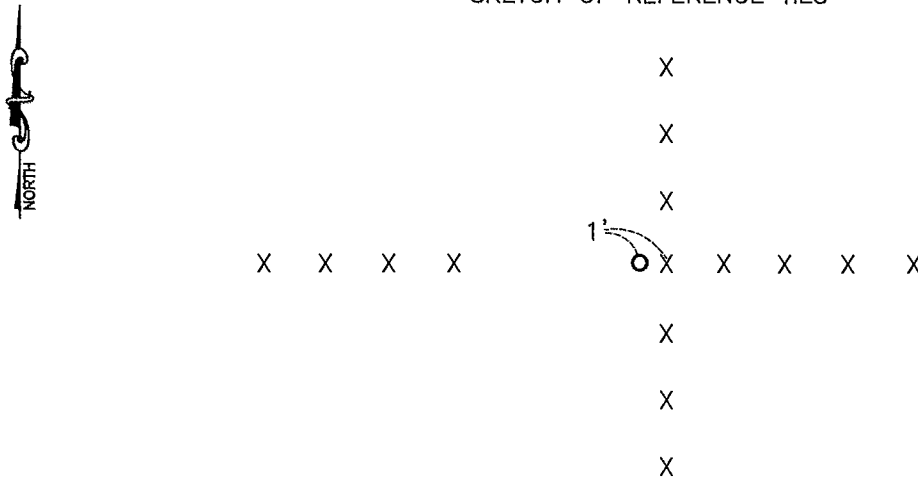

Minnesota State Plane Coordinate
System Murray County Datum
NAD83 (1996)

N: 118919.076
E: 434776.068

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Samuel Buehler 3/5/09
SIGNATURE DATE

Registration No. 43844

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of _____ A.D. 20 _____

County Recorder *James V. Johnson*
By _____, Deputy

DOCUMENT NO. JUL 10 2009

Statement of Evidence

In 1866, J. W. Bishop did the original subdivision of the township.

On June 19, 1913 a stone was set at the center of section.

On October 21, 2008, Bueltel-Moseng Land Surveying found a stone 1 foot west of the corner fence post. We set $\frac{5}{8}$ " iron with seal #43844 beside the stone.