

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 18, Township 106, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On _____ found a _____
- left monument as found, lowered monument, removed monument (explain)
- On 10/14/15 placed a 5/8" iron with seal #50343

SKETCH OF REFERENCE TIES

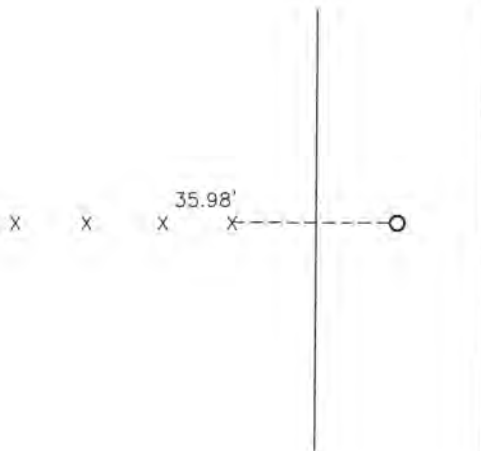


Minnesota State Plane Coordinate
 System Murray County Datum
 NAD83 (1996)
 N: 150406.608
 E: 553583.463

Nail and seal in corner fence post West 35.98'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.



 SIGNATURE

3-21-16

 DATE

Registration No. 50343

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of MURRAY

I hereby certify that this document was filed in the Co. Recorders office at 11:00 A.M on the 18TH day of OCTOBER A.D. 2016

County Recorder Evelyn C. Larson

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

In August, 1861, Wellman and Smoot did the original subdivision of the township.

On May 19, 1898, J.W. Woolstencroft recorded a government mound and stake at the corner.

On October 14, 2015, Bueltel-Moseng Land Surveying set a 5/8" iron with seal #50343 midway and on line between the section corners. It is in line with fence to the west and in centerline of the road.