

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 18, Township 107, Range 43, 5th P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

On 10-14-01 found a 2 8" stones on top of each other  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 10-14-01 placed a 1" pipe at the road surface  
DATE

### SKETCH OF REFERENCE TIES

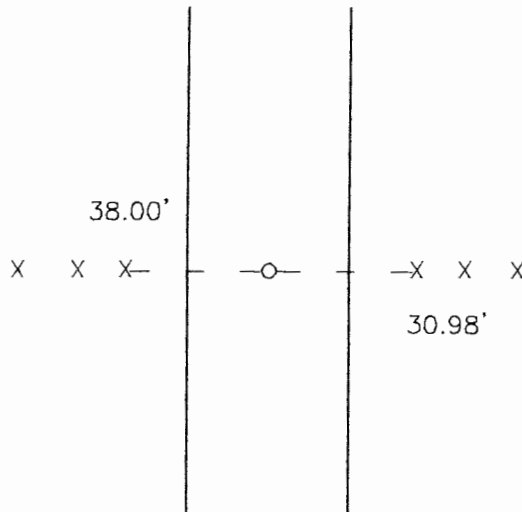

Nail and seal top end post West 38.00'

Nail and seal top end post East 30.98'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Lyle C. Messing 11-27-01  
SIGNATURE DATE

Registration No. 11943

- Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER

County of

**DEC 27 2001**

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M on the \_\_\_\_\_ day of \_\_\_\_\_ A.D. 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

### Statement of Evidence

The original survey was done by J.W. Bishop in 1866.

On November 14, 2001 Moseng Land Surveying and Alyde Grog dug with a backhoe and found 2 - 8" stones on top of each other. We placed iron around the stones. We placed a 1" iron pipe at the road surface over the stone.