

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 2, Township 106, Range 40, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY



At the corner location shown on the sketch:

On 07-11-2011 found a large field stone.
DATE

left monument as found, lowered monument, removed monument (explain)

On 07-11-2011 placed a cast iron monument.
DATE

SKETCH OF REFERENCE TIES

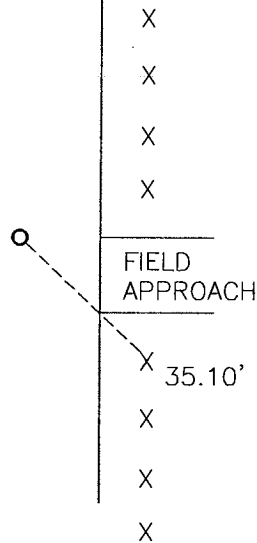

Minnesota State Plane Coordinate System Murray County Datum NAD83 (1996)

N: 160842.471
E: 543160.967

Nail and survey marker in wooden fence post SE 35.10'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James V. Johnson 1/23/12
SIGNATURE DATE

Registration No. 43844

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of JAN 25 2012 A.D. 20____

County Recorder *James V. Johnson*
By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

In 1861, Wellmann and Smoot did the original subdivision of the township.

On September 28, 1926, the corner was recorded as a old corner casting and a stone was placed on the west side.

On April 22, 1930, a stone was found at the corner, and a stone was set over the corner.

On July 11, 2011, Bueltel-Moseng Land Surveying dug by hand and found a large field stone 1'± below the surface of the road, with a large angle iron on the south side of it. We set a cast iron monument over the stone. the corner is in the center of the road and in line with the fence to the west.