

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 21, Township 107, Range 40, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 12/2/13 placed a 5/8" iron w/seal #43844
DATE

SKETCH OF REFERENCE TIES

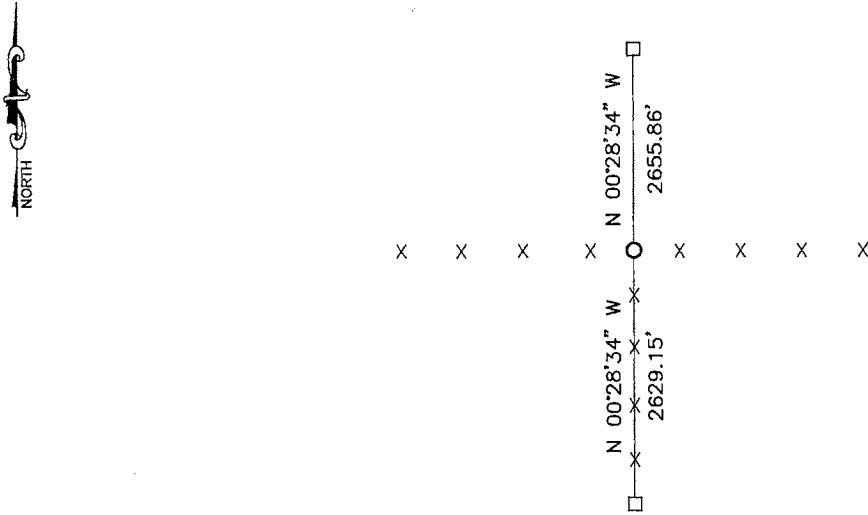

Minnesota State Plane Coordinate
 System Murray County Datum
 NAD83 (1996)
 N: 176707.620
 E: 532508.783

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James V. Johnson 2/4/14
 SIGNATURE DATE

Registration No. 43844
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ M on the _____ day of FEB 5 2014 A.D. 20____

County Recorder *James V. Johnson*
 By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

In 1861, L. Brockmann did the original subdivision of the township.

On December 2, 2013, Bueltel-Moseng Land Surveying set a 5/8" iron with seal #43844 by projecting old wooden post fence line from the east to the line between the northeast and southeast corners of Section 21 (bearing-bearing). It is in line with fences to the east, west, and south.