


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section **28** , Township **108** , Range **41** 5th P.M.
STATE OF MINNESOTA, County of Murray.

Statement: July 13, 1989 - Found an 18 inch x 8 inch x 12 inch stone. Placed a Mn/DOT Cast Iron Monument.

SKETCH OF REFERENCE TIES

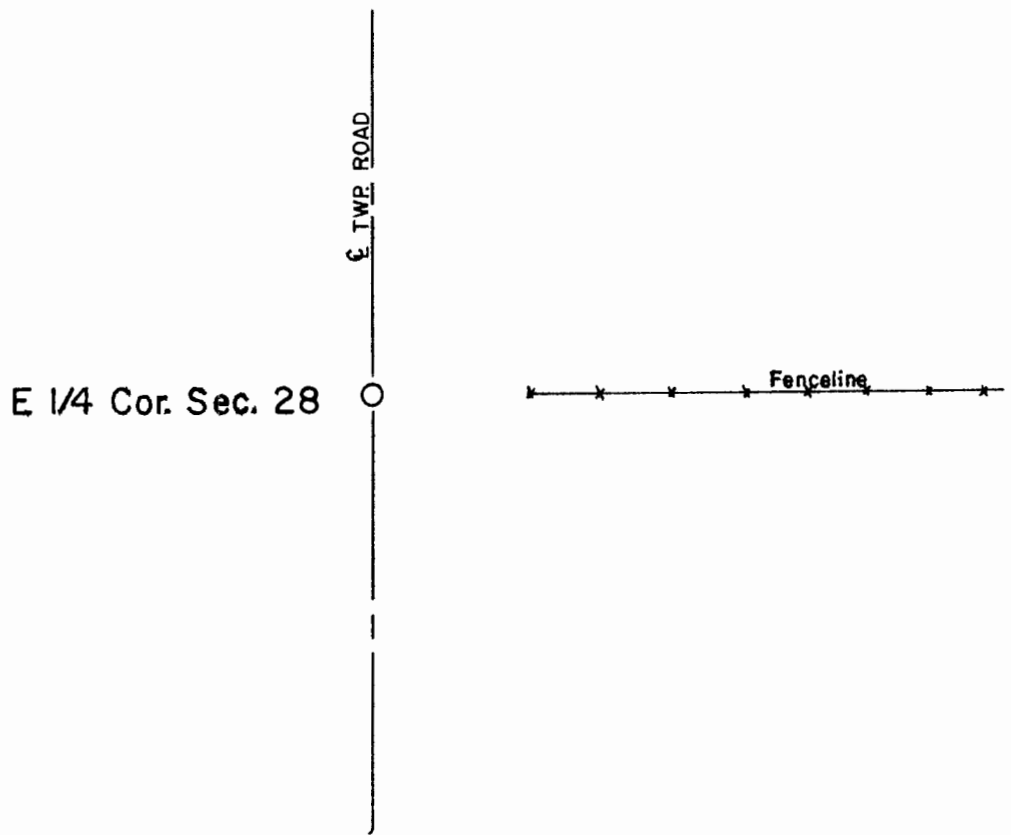

Statement of evidence relative to this corner location is on the back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Duane A. Bonnema
Duane A. Bonnema

9-11-89
Date

Minnesota Registration No. 14895

OFFICE OF THE COUNTY RECORDER
COUNTY OF MURRAY **NOV 15 1989**

I hereby certify that this document was filed in the County Recorder's office at ____M. on the ____ day of _____ A.D., 19__

County Recorder *James U. Paul*

By _____, Deputy
DOCUMENT NO. _____

East Quarter Cor. Sec. 28 T108N-R41W

Statement:

August 1861

Original Government Land Office Surveyor L. G. M. Fletcher records in his field notes, "built mound with trench pits, charred stake, per instructions."

June 4, 1907

J. W. Woolstencroft, County Surveyor, records in the County Surveyor's Record Book, page 201, that he established this Corner and that he put a stone here while he was doing survey work in Section 28.

July 13, 1989

Duane A. Bonnema, LS Reg. No. 14895, found an 18 inch x 8 inch x 12 inch field stone 2 feet below the road surface. Placed a Minnesota Department of Transportation Cast Iron Monument 5 inches below the road surface above the field stone. The half mile dimensions North and South agree within 1 foot of the dimension noted in the 1907 survey.