

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 29, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 04-27-2011 placed a SURVEY SPIKE WITH SEAL #43844
DATE

SKETCH OF REFERENCE TIES

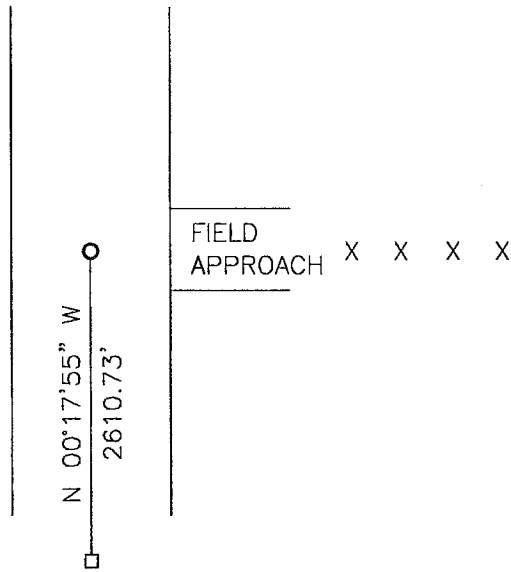


Minnesota State Plane Coordinate System Murray County Datum NAD83 (1996)

N: 171365.940
E: 558883.243

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

 12/16/11
SIGNATURE DATE

Registration No. 43844

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of _____ A.D. 20 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

In 1861, L. Brockmann did the original subdivision of the township.

In 1986, the Murray County Highway Department found a stone at the corner. They placed a 1/2" rebar over the stone and a PK nail over at the road surface.

On November 8, 2007, Zieske Land Surveying found an iron monument at the corner.

On April 27, 2011, Bueltel-Moseng Land Surveying set a survey spike with seal #43844 at the road surface using the ties from Zieske Land Surveying.