

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 7, Township 108, Range 43, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 3/10/14 placed a 5/8" iron w/seal #50343
DATE

SKETCH OF REFERENCE TIES

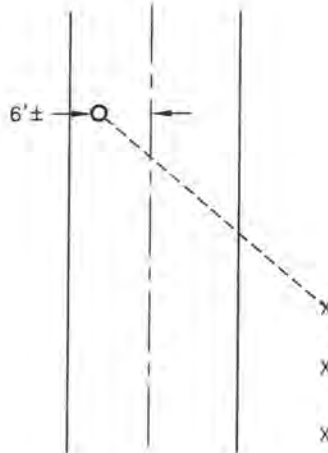

Minnesota State Plane Coordinate
 System Murray County Datum
 NAD83 (1996)

N: 219423.335
 E: 427210.107

DNR seal in end fence post SE 85.80'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 4/21/15
SIGNATURE DATE
 Registration No. 50343

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of **FEB 20 2015** A.D. 20____

County Recorder Evelyn C. Larson

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

In 1866, J. W. Bishop did the original subdivision of the township.

On April 27, 1983, Lowell Pommerening set a DNR monument at the corner.

On March 10, 2014, Bueltel-Moseng Land Surveying set $\frac{5}{8}$ " iron with seal #50343 between section corners as the DNR did on the 1983 survey. It is $6' \pm$ west of centerline of the road.