

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 14, Township 107, Range 40, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 7/24/17 placed a 5/8" iron with seal #43844  
DATE

### SKETCH OF REFERENCE TIES

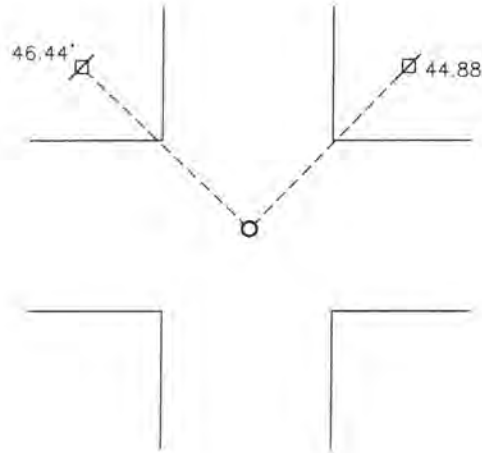

Minnesota State Plane Coordinate  
System Murray County Datum  
NAD83 (1996)

N: 184626.761  
E: 540414.236

Nail and bottle cap in utility pole NW 46.44'  
Nail and bottle cap in utility pole NE 44.88'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 9/18/17  
SIGNATURE DATE

Registration No. 43844

- Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

STATE OF MINNESOTA, } ss.  
COUNTY OF MURRAY, }

I hereby certify that the within Instrument was filed in this office for record on the 12<sup>TH</sup> day of OCTOBER A.D. 20 17 at 11:00 o'clock A. M. and was duly recorded as Document No. \_\_\_\_\_

[Signature]  
County Recorder

## Statement of Evidence

In 1861, L Brockmann did the original subdivision of the township.

In 1964, D.N.R. Bureau of Engineering set a railroad spike at the corner.

On July 21, 2017, Bueltel-Moseng Land Surveying dug with a backhoe and found nothing. We set 5/8" iron with seal #43844 by using D.N.R. survey from 1964.