

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 18, Township 108, Range 41, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On 06-13-2008 found a 1" SOLID IRON
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

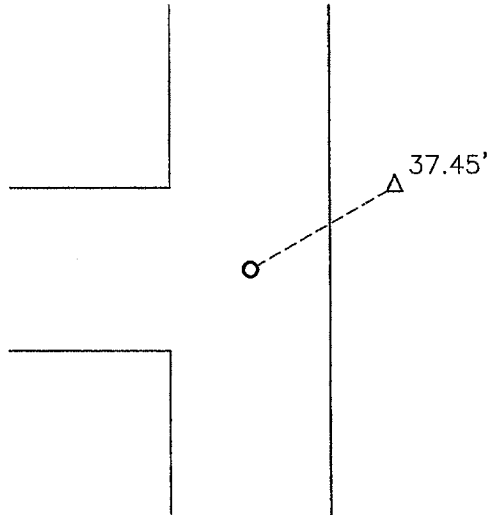


Minnesota State Plane Coordinate
System Murray County Datum
NAD83 (1996)

N: 216343.208
E: 487429.902

Nail and seal in pedestal guard post NE 37.45'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.


SIGNATURE 1/29/09
DATE

Registration No. 43844

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of _____ A.D. 20 _____

County Recorder James V. Johnson
By _____, Deputy

DOCUMENT NO. JUL 10 2009

Statement of Evidence

In 1861, L. G. M. Fletcher did the original subdivision of the township.

On June 13, 2008, Bueltel-Moseng Land Surveying found a 1" solid iron 8" below road surface in the center of the intersection. The iron is within $4' \pm$ of single proportionate distance. We accepted the corner.