

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 21, Township 108, Range 43, 5th P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

On 10-14-01 found a Nothing
DATE

left monument as found, lowered monument, removed monument (explain)

On 10-14-01 placed a 5/8" rerod with a seal
DATE

SKETCH OF REFERENCE TIES

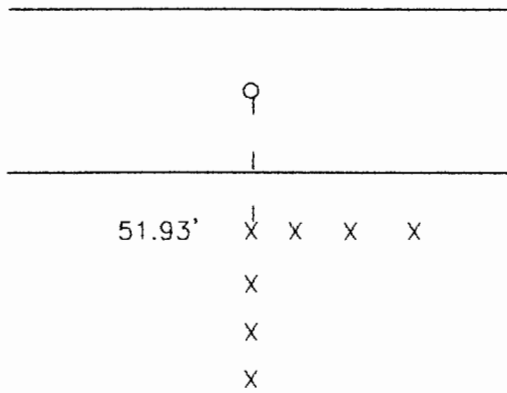

Nail and seal in corner fence post 51.93' South

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Syle E. Moore 11-28-01
SIGNATURE DATE

Registration No. 11943

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

DEC 27 2001

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of _____ A.D. 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

The original survey was done by J.W. bishop in 1866

In 1956 a wooded hub was set by the Highway Department.

On November 14, 2001 Moseng Land Surveying set a 5/8" rerod w/seal in line with fence to the south and in center line of the road. (At the County Highway Department we did not dig.)