

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 23, Township 108, Range 43, 5th P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

On 10-14-01 found a Nothing
DATE

left monument as found, lowered monument, removed monument (explain)

On 10-14-01 placed a 5/8" rerod w/seal
DATE

SKETCH OF REFERENCE TIES

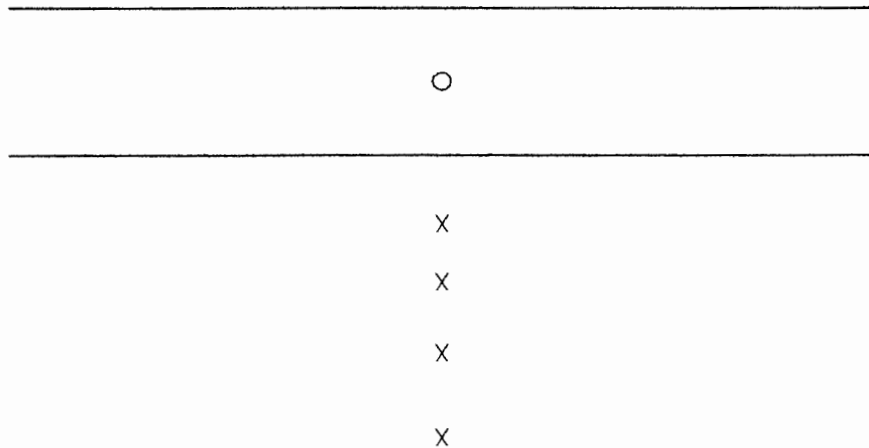

No ties

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Lyle C Moen 12-10-01
SIGNATURE DATE

Registration No. 11943

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER **DEC 27 2001**
County of

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of _____ A.D. 19__

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

The original survey was done by J.W. Bishop in 1866.

In 1956 a wooden hub was set by the highway department.

On November 23, 2001 Moseng Land Surveying set a 5/8" rerod w/seal. Midway fell 15' East of the existing fence lines. We set the corner on line with section corners, and in line with North-South fences. (We did not dig at the county's request.)