

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 24, Township 107, Range 40, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On 7/18/17 found a D.N.R. Monument
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

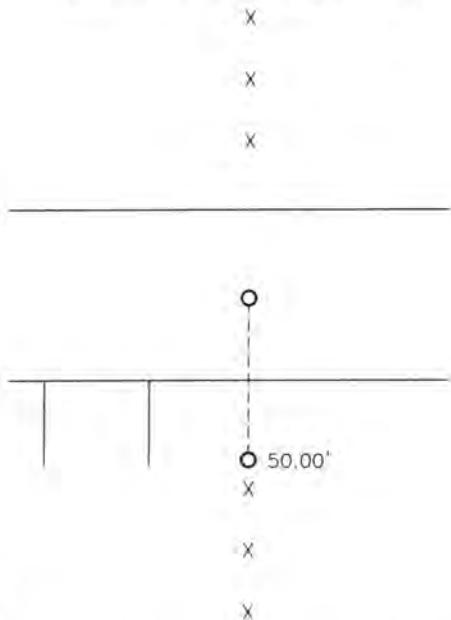

Minnesota State Plane Coordinate
 System Murray County Datum
 NAD83 (1996)

N: 179319.504
 E: 545720.351

5/8" iron w/seal #43844 South 50.00'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 9/18/17
SIGNATURE DATE

Registration No. 43844

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

STATE OF MINNESOTA, } ss.
 COUNTY OF MURRAY, }

I hereby certify that the within Instrument was filed in this office for record on the 12TH day of OCTOBER A.D. 20 17 at 11:00 o'clock A. M. and was duly recorded as Document No. _____

[Signature]
 County Recorder

Statement of Evidence

In 1861, L. Brockmann did the original subdivision of the township.

In October, 1898, J.W. Woolstencraft shows a 4"x6"x20" stone at the corner.

In 1964, the D.N.R. Bureau of Engineering found an iron pin at the corner.

In 1971, the D.N.R. Bureau of Engineering set a railroad spike at the corner.

On July 2, 1985, the D.N.R. Bureau of Engineering dug with a backhoe and found a 3/4"x7" rebar. They accepted the rebar and replaced it with a 1 1/4"x1 1/4" perforated steel tube with aluminum cap stamped "D.N.R. SURVEY MARKER."

On July 18, 2017, Bueltel-Moseng Land Surveying found a D.N.R. Monument with aluminum cap stamped "D.N.R. SURVEY MARKER."