

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 31, Township 108, Range 43, 5th P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

On 10-05-01 found a large field stone  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 10-05-01 placed a pipe with a seal #11943 at the road surface.  
DATE

### SKETCH OF REFERENCE TIES

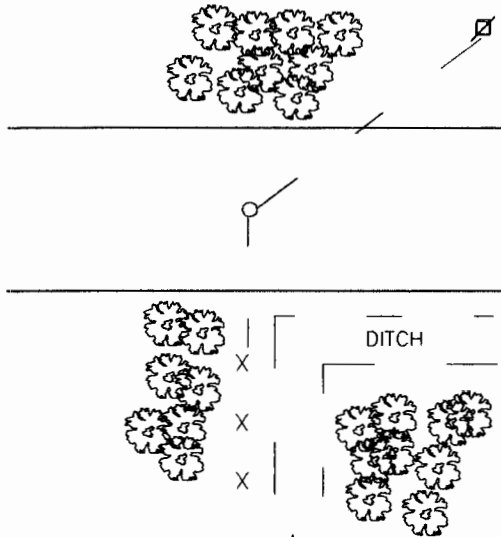

Nail and seal #11943 in top of end fence post 43.55' South

Nail and seal #11943 in power pole 79.90' Northeast

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ryle C. Moring 2-12-04  
SIGNATURE DATE

Registration No. 11943

- Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER  
County of

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M on the \_\_\_\_\_ day of 6-18-04 A.D. 19 \_\_\_\_\_

County Recorder James V. Johnson  
By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence

On October 5, 2001 Moseng Land Surveying and Clyde Krog dug with a backhoe and found a large field stone, we set a rerod with a seal on the north side of the stone. We tied the corner out and set a iron pipe at the road surface.