

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 32, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On 04-27-2011 found a concrete monument
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 04-27-2011 placed a railroad spike on the north and south sides of the monument.
DATE

SKETCH OF REFERENCE TIES

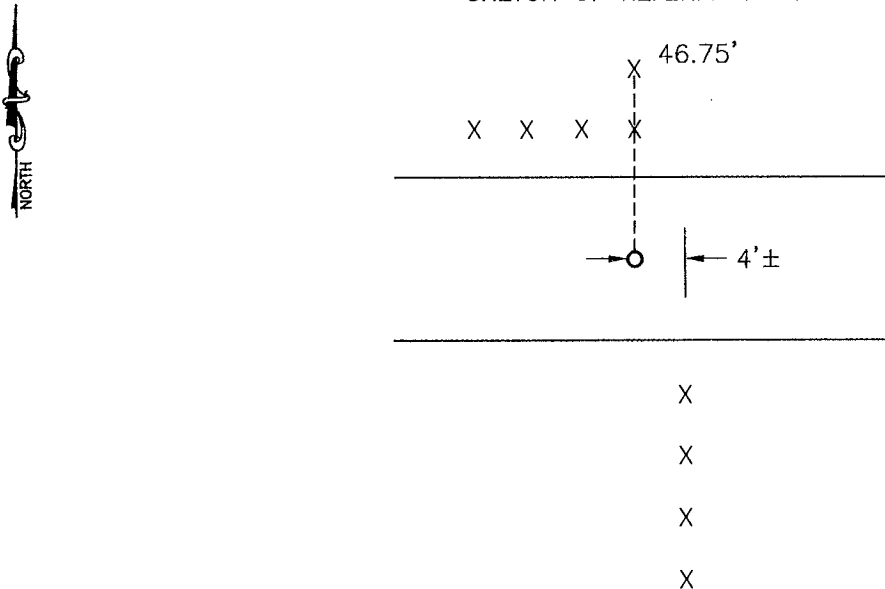

Minnesota State Plane Coordinate
System Murray County Datum
NAD83 (1996)
N: 168756.411
E: 556251.574

Nail and bottle cap in second wooden post North 46.75'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David Bentley 12/6/11
SIGNATURE DATE

Registration No. 43844

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of _____ A.D. 20 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

In 1861, Brockmann did the subdivision of the township.

On May 15, 1975, the Murray County Highway Department found a concrete monument.

On April 27, 2011, Bueltel-Moseng Land Surveying found a concrete monument using the county ties and stationing. We set railroad spike on the north and south sides of the monument.