

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 32, Township 108, Range 41, 5th P.M.

STATE OF MINNESOTA, County of Murray

At the corner location shown on the sketch:

- On April 5, 2006 found a large field stone 1.5 feet below the surface
DATE
- left monument as found, lowered monument, removed monument (explain)
- On April 5, 2006 placed a chiseled X in the top center of the stone and placed a 5/8"
DATE to the West and East of the stone with seal 43844, it is in line with fence to the North


SKETCH OF REFERENCE TIES

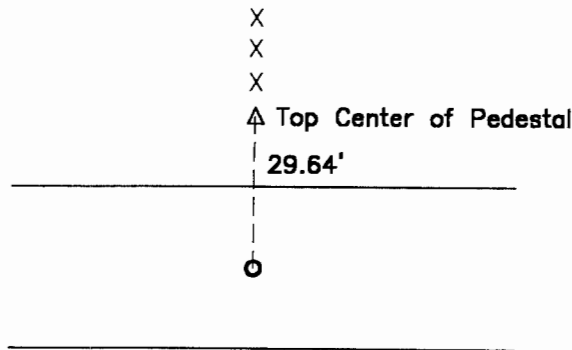

Minnesota State Plane Coordinate
 System Murray County Datum
 NAD83 (1996)
 N: 200481.225
 E: 492788.813

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.


SIGNATURE June 15, 2006
DATE

Registration No. 43844

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of _____ A.D. 20 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

On April 6, 1970 Murray County Highway Department found a field stone 2.1 feet below the surface. They place a 18 inch long bridge bolt above the stone.

On April 5, 2006 Bueltel-Moseng Land Surveying dug with backhoe and found a field stone 1.5 feet below the surface. We chiseled an X in the top center of the stone and placed a 5/8" iron to the West and East of the stone with seal number 43844. It is in line with fence to the North.