

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 5, Township 105, Range 42, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 10-21-2005 placed a 5/8" IRON WITH SEAL #43844  
DATE

### SKETCH OF REFERENCE TIES

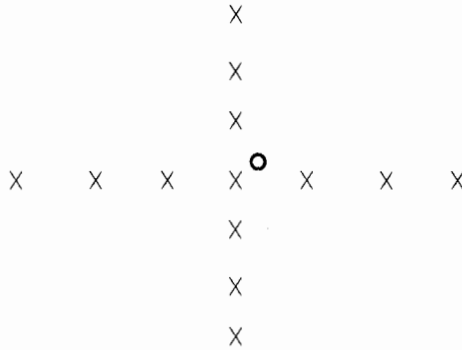

CORNER IS 1'± NORTHEAST OF CORNER FENCE POST.

Minnesota State Plane Coordinate  
System South Zone  
NAD83 (1996)

N: 674989.791  
E: 2120573.388

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*Samuel Buehler* 2/3/06  
SIGNATURE DATE

Registration No. 43844

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M on the \_\_\_\_\_ day of MAR 14 2006 A.D. 20 \_\_\_\_\_

County Recorder *James R. Johnson*  
By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

## Statement of Evidence

In September, 1866 J. W. Bishop did the original survey.

On October 21, 2005 Bueltel-Moseng Land Surveying set a  $\frac{5}{8}$ " iron with seal #43844 midway and on line between the section corners.