

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 5, Township 106, Range 40, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 4/3/15 placed a 5/8" iron with seal #43844
DATE

SKETCH OF REFERENCE TIES

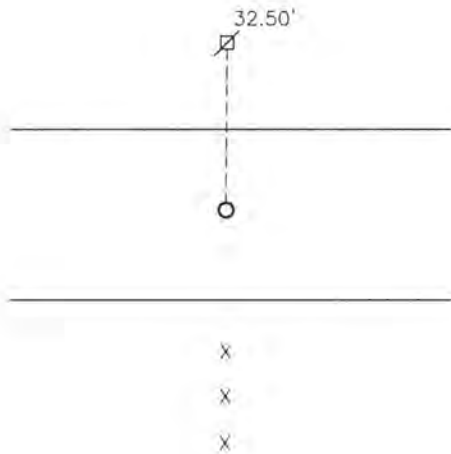

Minnesota State Plane Coordinate
System Murray County Datum
NAD83 (1996)

N: 163438.659
E: 524547.184

Nail and seal in utility pole North 32.50'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 3/2/16
SIGNATURE DATE

Registration No. 43844

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of MURRAY

I hereby certify that this document was filed in the Co. Recorders office at 11:00 A.M. on the 18TH day of OCTOBER A.D. 20 16

County Recorder Evelyn C. Larson

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

In July, 1861, J.W. Myers did the original survey of the north line of the township.

On October 16, 1901, J.W. Woolstencroft recorded a 12"x18"x36" stone at the corner.

On May 25, 2012, Murray County Highways Department, found a capped iron at the corner.

On April 3, 2015, Bueltel-Moseng Land Surveying dug with a backhoe and found nothing. We set 5/8" iron with seal #43844 midway and in centerline of the road. It is in line with fence to the south.