

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 5, Township 107, Range 43, 5th P.M.

STATE OF MINNESOTA, County of Murray



At the corner location shown on the sketch:

On 11-14-01 found a Nothing
DATE

left monument as found, lowered monument, removed monument (explain)

On 11-14-01 placed a 1" pipe at the road surface
DATE

SKETCH OF REFERENCE TIES

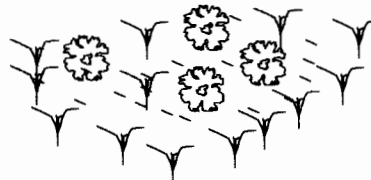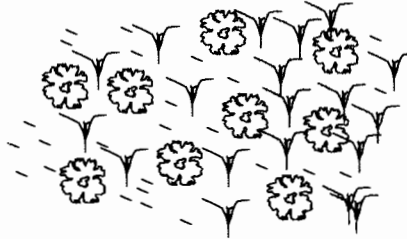

No Ties

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Steve C. Moring 12-10-01
SIGNATURE DATE

Registration No. 11943

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____ **DEC 27 2001**
I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of _____ A.D. 19 _____

County Recorder _____
By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

The corner was originally set by J.W. Bishop on September 1st - 7th 1866. He set Pit and Mound midway and on line.

On November 14, 2001 Moseng Land Surveying and Klyde Crog dug with a backhoe and found nothing. We set a 1" pipe w/seal #11943 midway and on line. The total mile was 5274.00' the 1/2 was 2637.00'