

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter \_\_\_\_\_ Corner of Section 6 , Township 106 , Range 43 , 5th P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

On Sept 28, 1999 found a field stone 3' below surface  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On Sept 28, 1999 placed a 5/8" iron next to stone and a 1" iron pipe w/seal at surface  
DATE

### SKETCH OF REFERENCE TIES

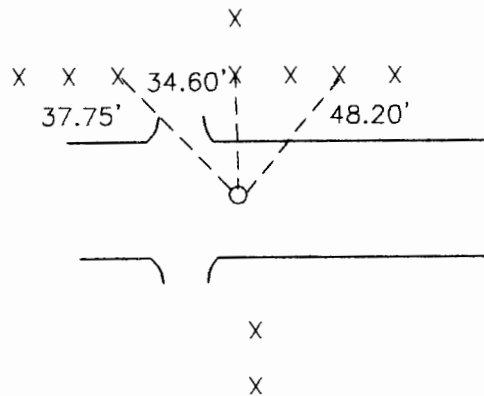

Nail and seal in gate post 37.75' NW  
Steel corner fence post 34.60' N  
Steel fence post, second east 48.20' NE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*Ryle C. Moser* Oct 4, 1999  
SIGNATURE DATE

Registration No. 11943

Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

### OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M on the \_\_\_\_\_ day of FEB 10 2000 A.D. 19 \_\_\_\_\_

County Recorder *James V. Johnson*  
By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

## Statement of Evidence

On September 15, 1866 the original survey was done, set post in mound.

On July 10, 1899 the north line was measured by J.W. Woolsteincraft his distance from the Northwest corner to the North Quarter was 2648 feet our distance is 2647.01 feet, his distance from the Northeast corner to the North Quarter was 2645 feet our distance is 2643.22 feet.

On September 28, 1999 Moseng Land Surveying dug with backhoe, and found a field stone 3 feet below surface. We placed a 5/8" iron on west side of stone and a 1" iron pipe with seal number 11943 at surface.