

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 1, Township 107, Range 42, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On 4/25/16 found a 1/4" iron
DATE

left monument as found, lowered monument, removed monument (explain)

On 4/25/16 placed a 5/8" iron with seal #50343
DATE

SKETCH OF REFERENCE TIES

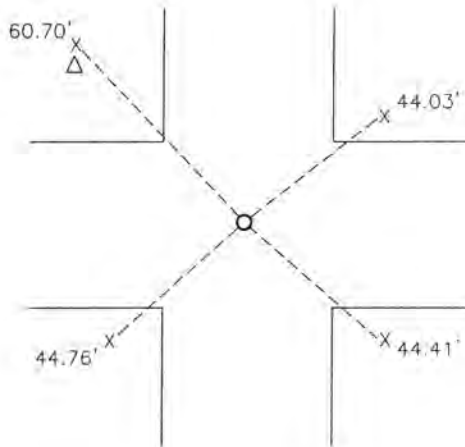


Minnesota State Plane Coordinate
System Murray County Datum
NAD83 (1996)

N: 195252.342
E: 485095.451

Nail and bottle cap in pedestal post NW 60.70'
"X" in culvert SW 44.76'
"X" in culvert SE 44.41'
"X" in culvert NE 44.03'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

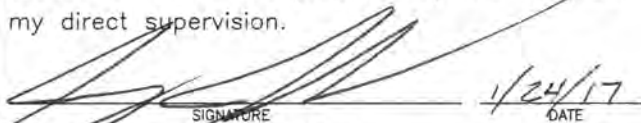
SIGNATURE 1/24/17
DATE

Registration No. 50343

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of MURRAY

I hereby certify that this document was filed in the Co. Recorders office at 9:00 A.M. on the 17TH day of FEBRUARY A.D. 20 17

County Recorder Ervelyn C. Larson
By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

In 1861, J.W. Myers did the original survey of the north line of the township.

On September 4, 1957, the Murray County Highway Department found a field stone and set 1/2" steel rod over found stone.

On May 4, 1992, the Murray County Highway Department set a 1/2" steel pin at the corner.

On January 22, 2010, Zieske Land Surveying found an iron monument at the corner.

On April 25, 2016, Bueltel-Moseng Land Surveying found a 1/4" iron at the corner. We set a 5/8" iron with seal #50343 over found 1/4" iron at the surface of the road.