

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 14, Township 107, Range 40, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On 7/18/17 found a D.N.R. Monument

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

SKETCH OF REFERENCE TIES

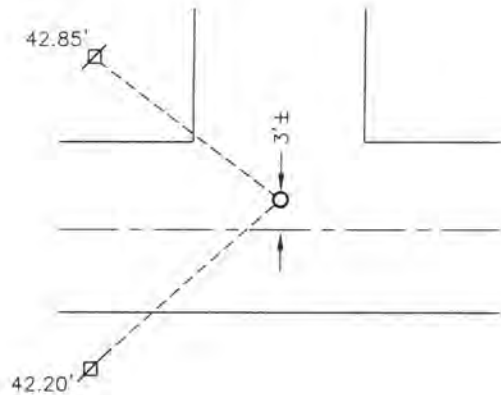

Minnesota State Plane Coordinate
System Murray County Datum
NAD83 (1996)

N: 184598.054
E: 543058.692

Nail and bottle cap in utility pole NW 42.85'
Nail and bottle cap in utility pole SW 42.20'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision

[Handwritten Signature]
SIGNATURE

9/18/17
DATE

Registration No. 43844

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

STATE OF MINNESOTA, } ss.
COUNTY OF MURRAY, }

I hereby certify that the within Instrument was filed in this office for record on the 12TH day of OCTOBER A.D. 20 17 at 11:00 o'clock A. M. and was duly recorded as Document No. _____

[Handwritten Signature]
County Recorder

Statement of Evidence

In 1861, L. Brockmann did the original subdivision of the township.

In 1964, D.N.R. Bureau of Engineering set railroad spike at the center of the intersection of the roads to the east, west, and north.

In 1971, D.N.R. Bureau of Engineering found railroad spike at the corner.

On July 2, 1985, the D.N.R. Bureau of Engineering dug with a backhoe and found a 10"x12"x22" stone at the corner. They set a 1-1/4"x1-1/4"x16" perforated steel tube with aluminum cap stamped "D.N.R. SURVEY MARKER" over the stone.

On July 18, 2017, Bueltel-Moseng Land Surveying found a D.N.R. Monument with aluminum cap stamped "D.N.R. SURVEY MARKER."