

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 16, Township 105, Range 43, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On 11-06-2008 found a POINTED FIELD STONE
DATE

left monument as found, lowered monument, removed monument (explain)

On 11-06-2008 placed a 5/8" IRON WITH SEAL #43844 ON NORTH AND SOUTH
DATE SIDE OF STONE.

SKETCH OF REFERENCE TIES

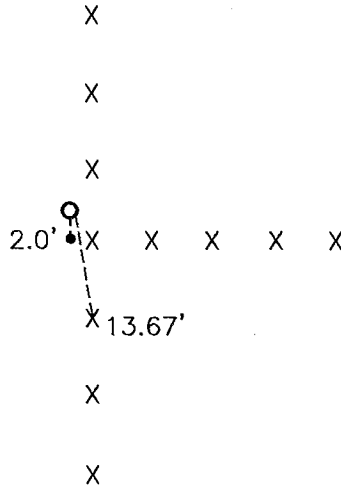

Minnesota State Plane Coordinate
System Murray County Datum
NAD83 (1996)
N: 121535.538
E: 437439.183

Mag nail in post South 13.67'
Pipe with RLS seal #42604 South 2.0'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James V. Johnson 3/5/09
SIGNATURE DATE

Registration No. 43844

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of _____ A.D. 20 _____

County Recorder *James V. Johnson*
By _____, Deputy

DOCUMENT NO. JUL 10 2009

Statement of Evidence

In 1866, J. W. Bishop did the original subdivision of the township.

On June 18, 1913 a stone was recorded at the corner.

On August 9, 2006, a $\frac{1}{2}$ " pipe with seal #42604 was set 0.3'± west of the corner fence post.

On November 11, 2008 Bueltel-Moseng Land Surveying found a pointed field stone at the corner, it is 2'± north of the corner fence post. We also found a $\frac{1}{2}$ " pipe with seal #42604 0.3'± west of corner fence post. We determined that the stone that we found was the one that had been set and recorded as the corner and held to it. We set $\frac{5}{8}$ " irons with seal #43844 on the north and south sides of the stone.