

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 18, Township 107, Range 43, 5th P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

On 10-14-01 found a 12" field stone  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 10-14-01 placed a 1" iron pipe w/seal #11943  
DATE

### SKETCH OF REFERENCE TIES

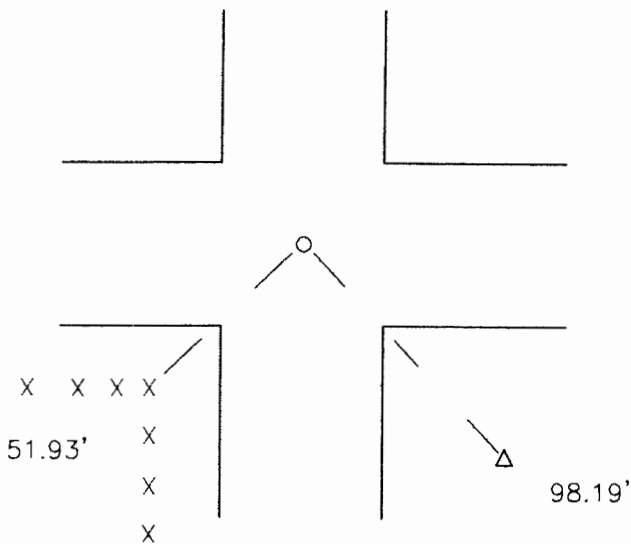

Nail and seal in pedistal 98.19' Southeast

Nail and seal in corner fence post 51.93' Southwest

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*Able C. Moring* 11-28-01  
SIGNATURE DATE

Registration No. 11943

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

### OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_ **DEC 27 2001**

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M on the \_\_\_\_\_ day of \_\_\_\_\_ A.D. 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

## Statement of Evidence

On November 14, 2001 Moseng Land Surveying and Clyde Krog dug with backhoe and found a 12" field stone 1' down. We lowered the stone after setting 20' ties. We placed a 5/8" Iron on the north side of the stone. We placed a 1" pipe w/seal at the road surface.