

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 19, Township 107, Range 43, 5th P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

On 11-12-01 found a 1/2" rerod 14" below the road surface
DATE

left monument as found, lowered monument, removed monument (explain)

On 11-12-01 placed a 5/8" iron rerod w/seal #11943 at road surface
DATE

SKETCH OF REFERENCE TIES

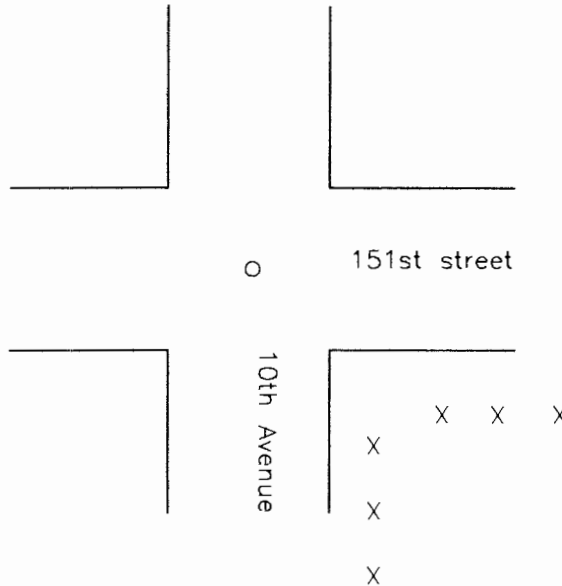

No Ties

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Lyle C. Moring 11-22-01
SIGNATURE DATE

Registration No. 11943

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of

DEC 27 2001

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of _____ A.D. 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

Original survey was done by J.W. Bishop in September 1866.

In 1985 the County Highway Department found a concrete monument. It was removed and replaced with a 30" rerod.

On November 12, 2001 Moseng Land Surveying dug with a jackhammer after finding a P.K. nail at the road surface. We found a 1/2" rerod 14" below the road surface. We then placed a 5/8" rerod w/seal at the road surface.