

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 22, Township 108, Range 43, 5th P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

On 11-12-01 found a rail road spike 4" down
DATE

left monument as found, lowered monument, removed monument (explain)

On 11-12-01 placed a 5/8" rerod w/seal over the spike at road surface
DATE

SKETCH OF REFERENCE TIES

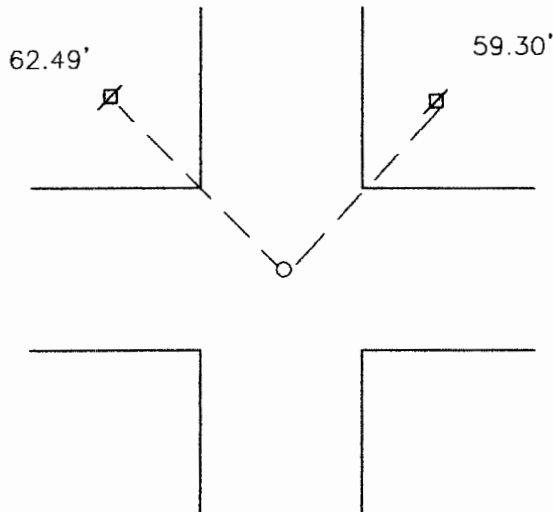

Nail and bottle cap in power pole Northwest 62.49'

Nail and bottle cap in power pole Northeast 59.30'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Kyle E Mosey 11-27-01
SIGNATURE DATE

Registration No. 11943

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER **DEC 27 2001**
County of

I hereby certify that this document was filed in the Co. Recorders office at _____ M on the _____ day of _____ A.D. 19 ____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

Original Survey was done in 1866 by J.W. Bishop.

Stone was found on June 26, 1925

At the County's Engineer's request, we did not dig up the asphalt.

On November 11, 2001 Moseng Land Surveying found a railroad spike 4" down.
We placed a 5/8" rerod with seal over the spike at the road surface.