

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 23, Township 108, Range 43, 5th P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

On 11-12-01 found a spike
DATE

left monument as found, lowered monument, removed monument (explain)

On 11-12-01 placed a 5/8" rerod w/seal #11943
DATE

SKETCH OF REFERENCE TIES

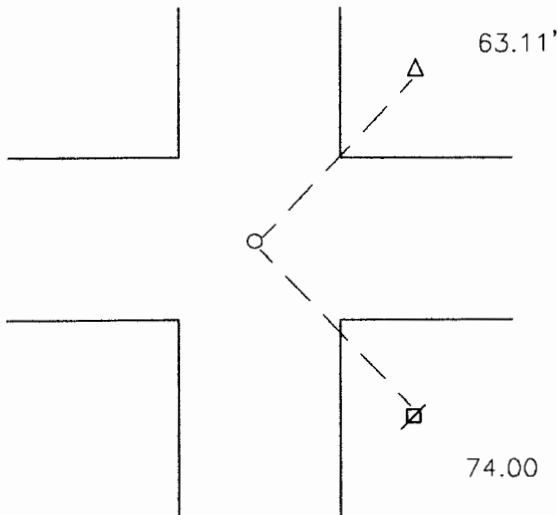

Nail and seal in power pole 74.00' Southeast

Pedestal Northeast 63.11'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Kyle C. Moring 12-10-01
SIGNATURE DATE

Registration No. 11943

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER **DEC 27 2001**
County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of _____ A.D. 19 ____

County Recorder _____
By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

Original survey was done in 1866 by J.W. Bishop.

On November 11, 2001 Moseng Land Surveying found a spike 2" below the road surface. At the County's request so we did not dig. We set a 5/8" rerod w/seal #11943 at the road surface.