

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 27, Township 106, Range 43, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On 10-12-2005 found a 3/4" PIPE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_

### SKETCH OF REFERENCE TIES

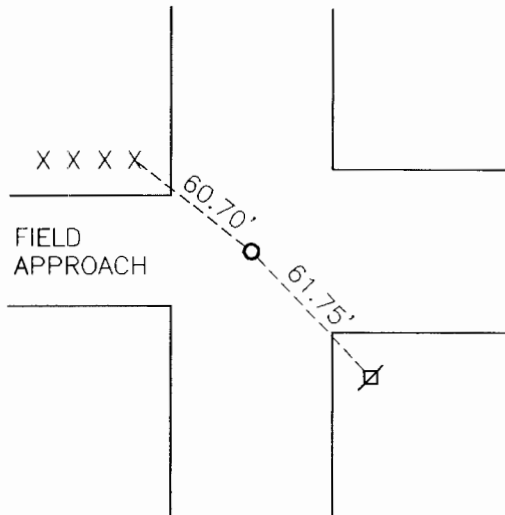

BEARING BASED ON THE  
MINNESOTA STATE PLANE  
COORDINATE SYSTEM  
MN SOUTH ZONE  
NAD 83 (1996).

N: 686022.450  
E: 2102407.352

NAIL AND SEAL IN POWER POLE SE 61.75'  
NAIL AND SEAL IN CORNER FENCE POST NW 60.70'

.Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 10/21/05  
SIGNATURE DATE

Registration No. 43844

- Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M on the \_\_\_\_\_ day of JAN 26 2006 A.D. 20 \_\_\_\_\_

County Recorder [Signature]  
By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

## Statement of Evidence

On September 10, 1902 J.W. Woolstern set government corner.

On October 12, 2005 Bueltel-Moseng Land Surveying found a  $\frac{3}{4}$ " pipe. We removed the pipe to dig with a backhoe and found nothing else. We then replaced the pipe.