

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 32, Township 108, Range 41, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 9/11/15 placed a 5/8" iron with seal #43844  
DATE

## SKETCH OF REFERENCE TIES

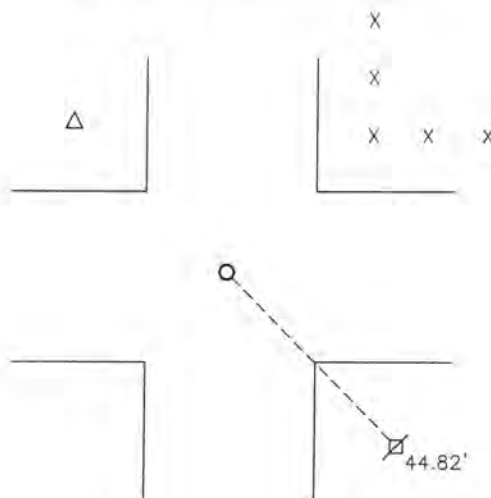

Minnesota State Plane Coordinate  
System Murray County Datum  
NAD83 (1996)

N: 200471.042  
E: 495435.473

Nail and survey marker in utility pole SE 44.82'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision

  
SIGNATURE

3/22/16  
DATE

Registration No. 43844

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER

County of MURRAY

I hereby certify that this document was filed in the Co. Recorders office at 11:00 A.M on the 18<sup>th</sup> day of OCTOBER A.D. 2016

County Recorder Evelyn C. Larson

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

## Statement of Evidence

In 1861, LGM Fletcher did the original subdivision of the township.

On June 3, 1907, J.W. Woolstencroft recorded at stone at the corner.

On April 5, 2006, Bueltel-Moseng Land Surveying found an unrecorded 3/8" iron. West tied it out and dug with a backhoe. We found a large field stone below the iron. We placed a 3/8" iron next to the stone and set a 1" pipe with seal #43844 at the surface.

On January 24, 2007, Zieske Land Surveying found an iron monument at the corner.

On September 11, 2015, Bueltel-Moseng Land Surveying could not find the 1" pipe at the corner. We set 5/8" iron with seal #43844 by using the recorded coordinates from the 2006 survey.