

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 6, Township 106, Range 43, 5th P.M.

STATE OF MINNESOTA, County of Murray

At the corner location shown on the sketch:

- On Sept 28, 1999 found a pointed field stone 2' below surface
DATE
- left monument as found, lowered monument, removed monument (explain)
- On Sept 28, 1999 placed a 5/8" iron next to stone and a 1" iron pipe w/seal at surface
DATE

SKETCH OF REFERENCE TIES

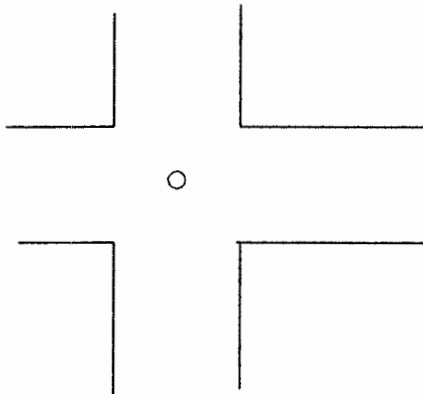

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Dele P. Moser Oct 6, 1999
SIGNATURE DATE

Registration No. 11943

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of FEB 10 ¹⁹⁹⁹ A.D. 19 _____

County Recorder James V. Johnson
By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

On September 15, 1866 the original survey was done, set post in mound.

On July 10, 1899 the north line was measured by J.W. Woolsteincraft his distance from the Northwest corner to the North Quarter corner was 2648 feet our distance is 2647.01 feet, the distance from the North Quarter corner to the Northeast corner was 2645 our distance is 2643.22 feet.

On September 28, 1999 Moseng Land Surveying dug with backhoe and found a pointed field stone 2 feet below surface. We placed a 5/8" iron on the North side of stone and a 1" iron pipe with seal number 11943 at surface.