

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW COR GOV'T LOT 1 of Section 21, Township 108, Range 41, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On 09-14-2009 found a FIELD STONE
DATE

left monument as found, lowered monument, removed monument (explain)

On 09-14-2009 placed a 5/8" IRON ON THE WEST SIDE OF STONE.
DATE

SKETCH OF REFERENCE TIES

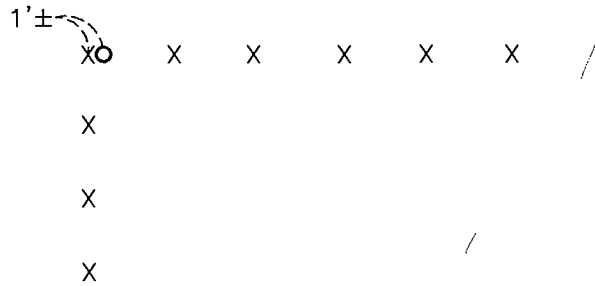

Minnesota State Plane Coordinate
System Murray County Datum
NAD83 (1996)
N: 209720.939
E: 495332.460

Nail and survey marker in corner fence post 1'± East.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sam Butler 11/24/09
SIGNATURE DATE

Registration No. 43844

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of _____ A.D. 20 _____

County Recorder *Janna V. Johnson*
By NOV 25 2009, Deputy

DOCUMENT NO. _____

Statement of Evidence

In 1861, L. G. M. Fletcher did the original subdivision of the township.

In December of 1914, Johnston, the County Surveyor set a stone at the corner.

On September 14, 2009, Bueltel-Moseng Land Surveying found a stone at the corner $6'' \pm$ below the surface.

We set a $\frac{2}{8}''$ iron with seal #43844 on the west side of the stone.