

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

WEST QUARTER Corner of Section 19, Township 106, Range 43, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On 8/31/16 found a field stone  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 8/31/16 placed a 5/8" iron with seal #43844  
DATE

### SKETCH OF REFERENCE TIES

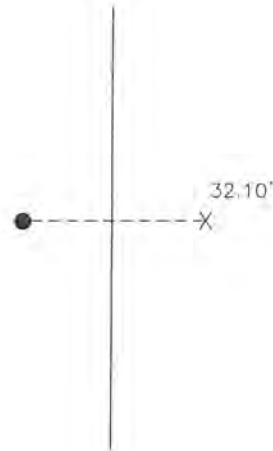

Minnesota State Plane Coordinate  
System Murray County Datum  
NAD83 (1996)

N: 145280.420  
E: 421656.304

Steel post East 32.10'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 12/8/16  
SIGNATURE DATE

Registration No. 43844

- Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER

County of MURRAY

I hereby certify that this document was filed in the Co. Recorders office at 9:00 A.M. on the 17<sup>TH</sup> day of FEBRUARY A.D. 20 17

County Recorder Evelyn C. Larson

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

## Statement of Evidence

In 1861, J.W. Myers did the original survey of west line of the township.

On November 20, 1925, J.W. Woolstencroft recorded a stone at the corner on line with an iron post to the east.

On August 31, 2016, Bueltel-Moseng Land Surveying dug with a backhoe in the center line of the road and in line with a steel post to the east, as shown on the 1925 survey. We found a field stone and set 5/8" iron with seal #43844 at the surface of the road.