


# SURVEYOR'S RECORD

Section 24

Township 105

Range 40

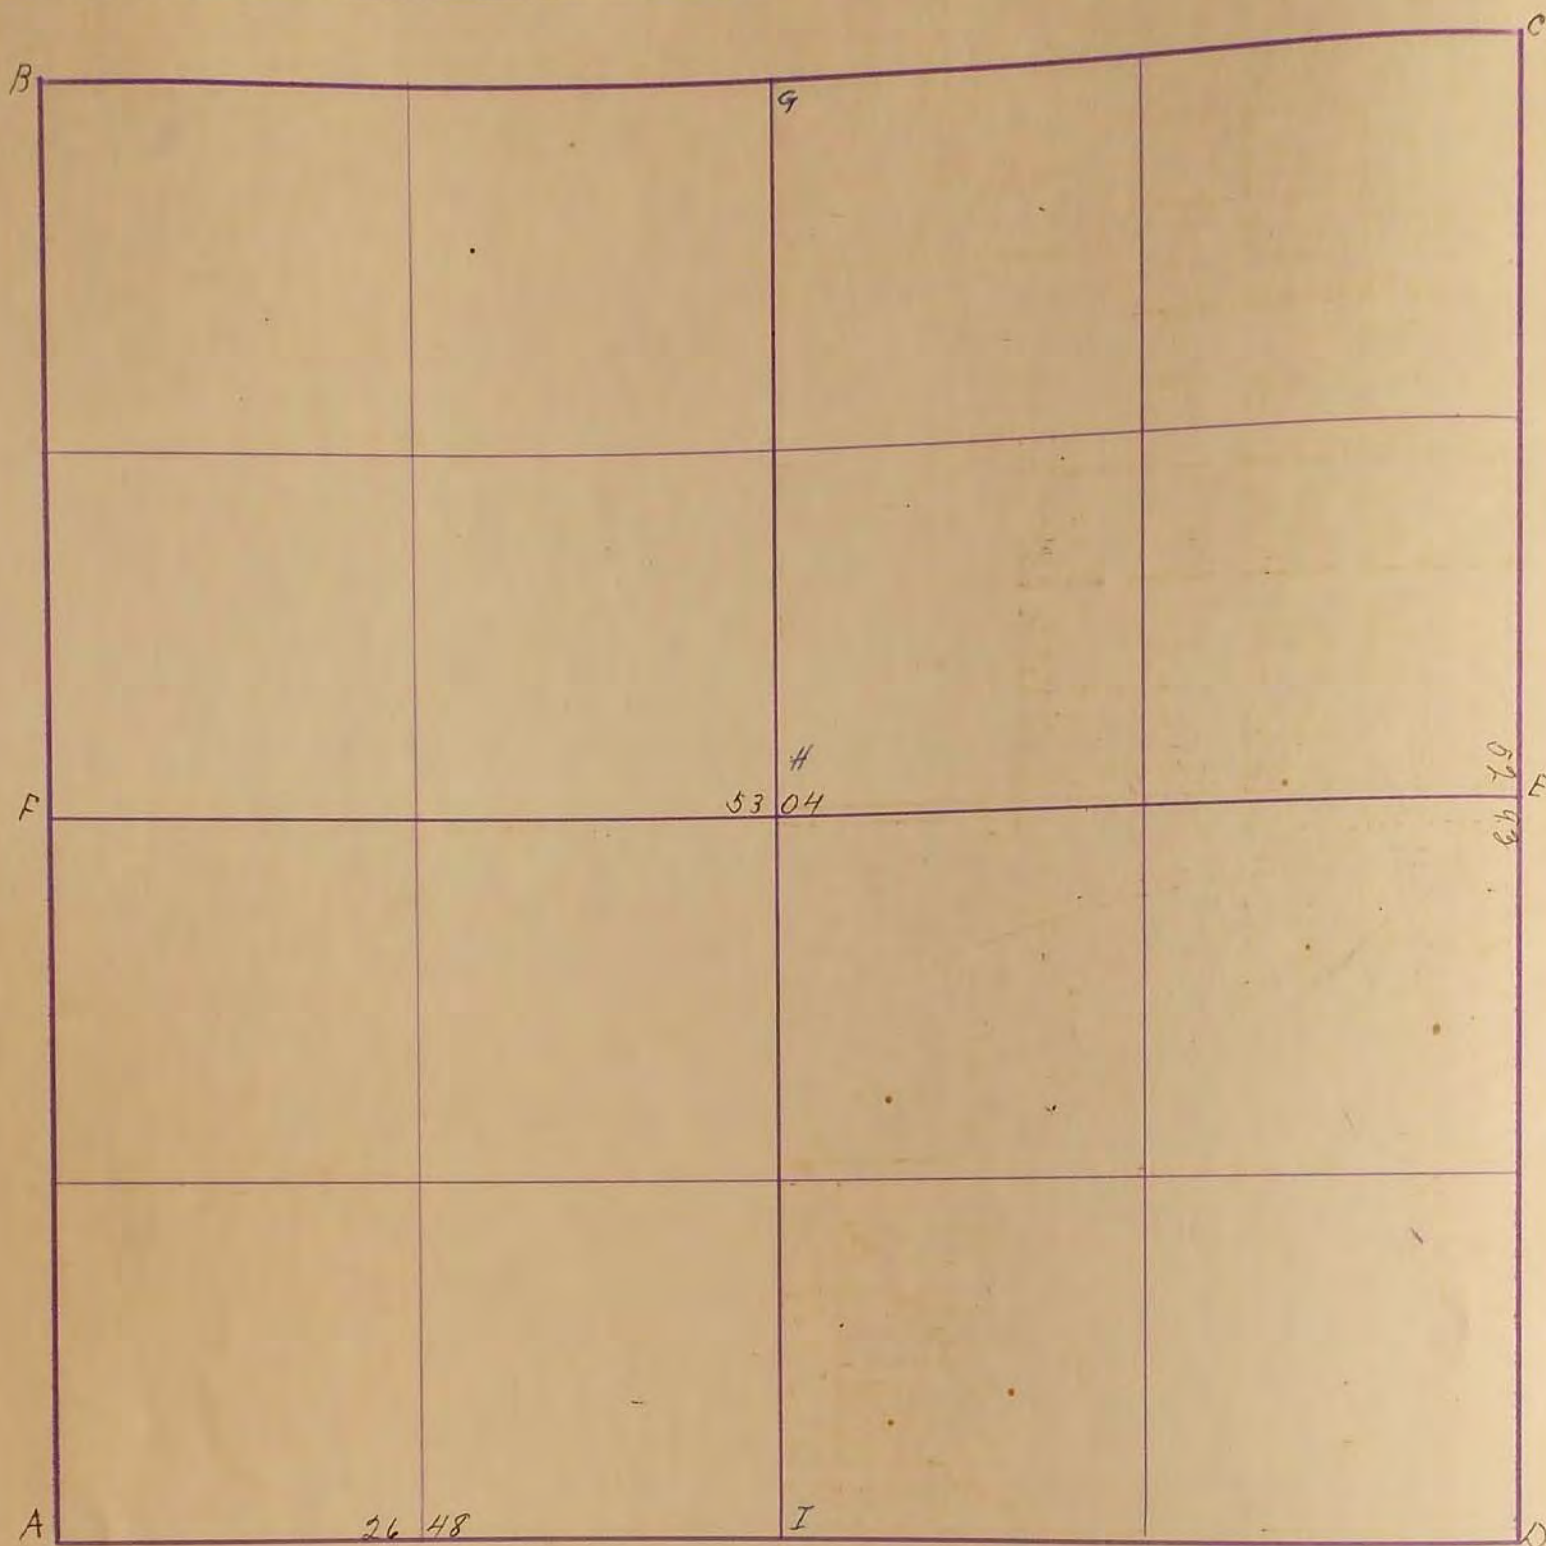

Mar 24 1898

A. 35 ft. west and 34 ft. south of trees

B. Stone 4x6x14

C. stone 1x3x16 in Gov mound

D. Stone in center of road

E. Gov. mound and pits Stone 6x6x14

F. Stone 6x6x14

*J. H. Thoolstoncraft*

"B" "Concrete Stone" R.P. Edge of Steel Cor post S.W. 79.0'

R.P. Edge of Steel cor post S.W. 79.2'; R.P. Tack in cor fence post S.E. 120.2'

"C" "Concrete Stone" R.P. Tack in Cor. fence post S.W. 44.2'; R.P.

Tack in cor fence post N.W. 61.0'

"D" "Concrete Stone" R.P. Center of concrete post south on Line 33.5' R.P.

Edge of steel cor. post N.W. 45.0' R.P. Edge of Concrete post N.E. 45.8'

G. Stone. R.P. N40° P.P. SE. 60.3'; R.P. N40° P.P. SW. 59.1';

R.P. N40° T.P. NW. 96.1' Sept. 1969 J. J. Sorenson

B. Cona. Block with "X" C.F.P. 41.04' N.W. - Oct. 27, 1969 Robert Knott

Chiseled + on Steel C.F.P. W.S.W. 79.16'

Chiseled + on steel R.F.P. S.S.W. 79.87

24  
25




SURVEY No. \_\_\_\_\_

Section 24

Town 105

Range 40

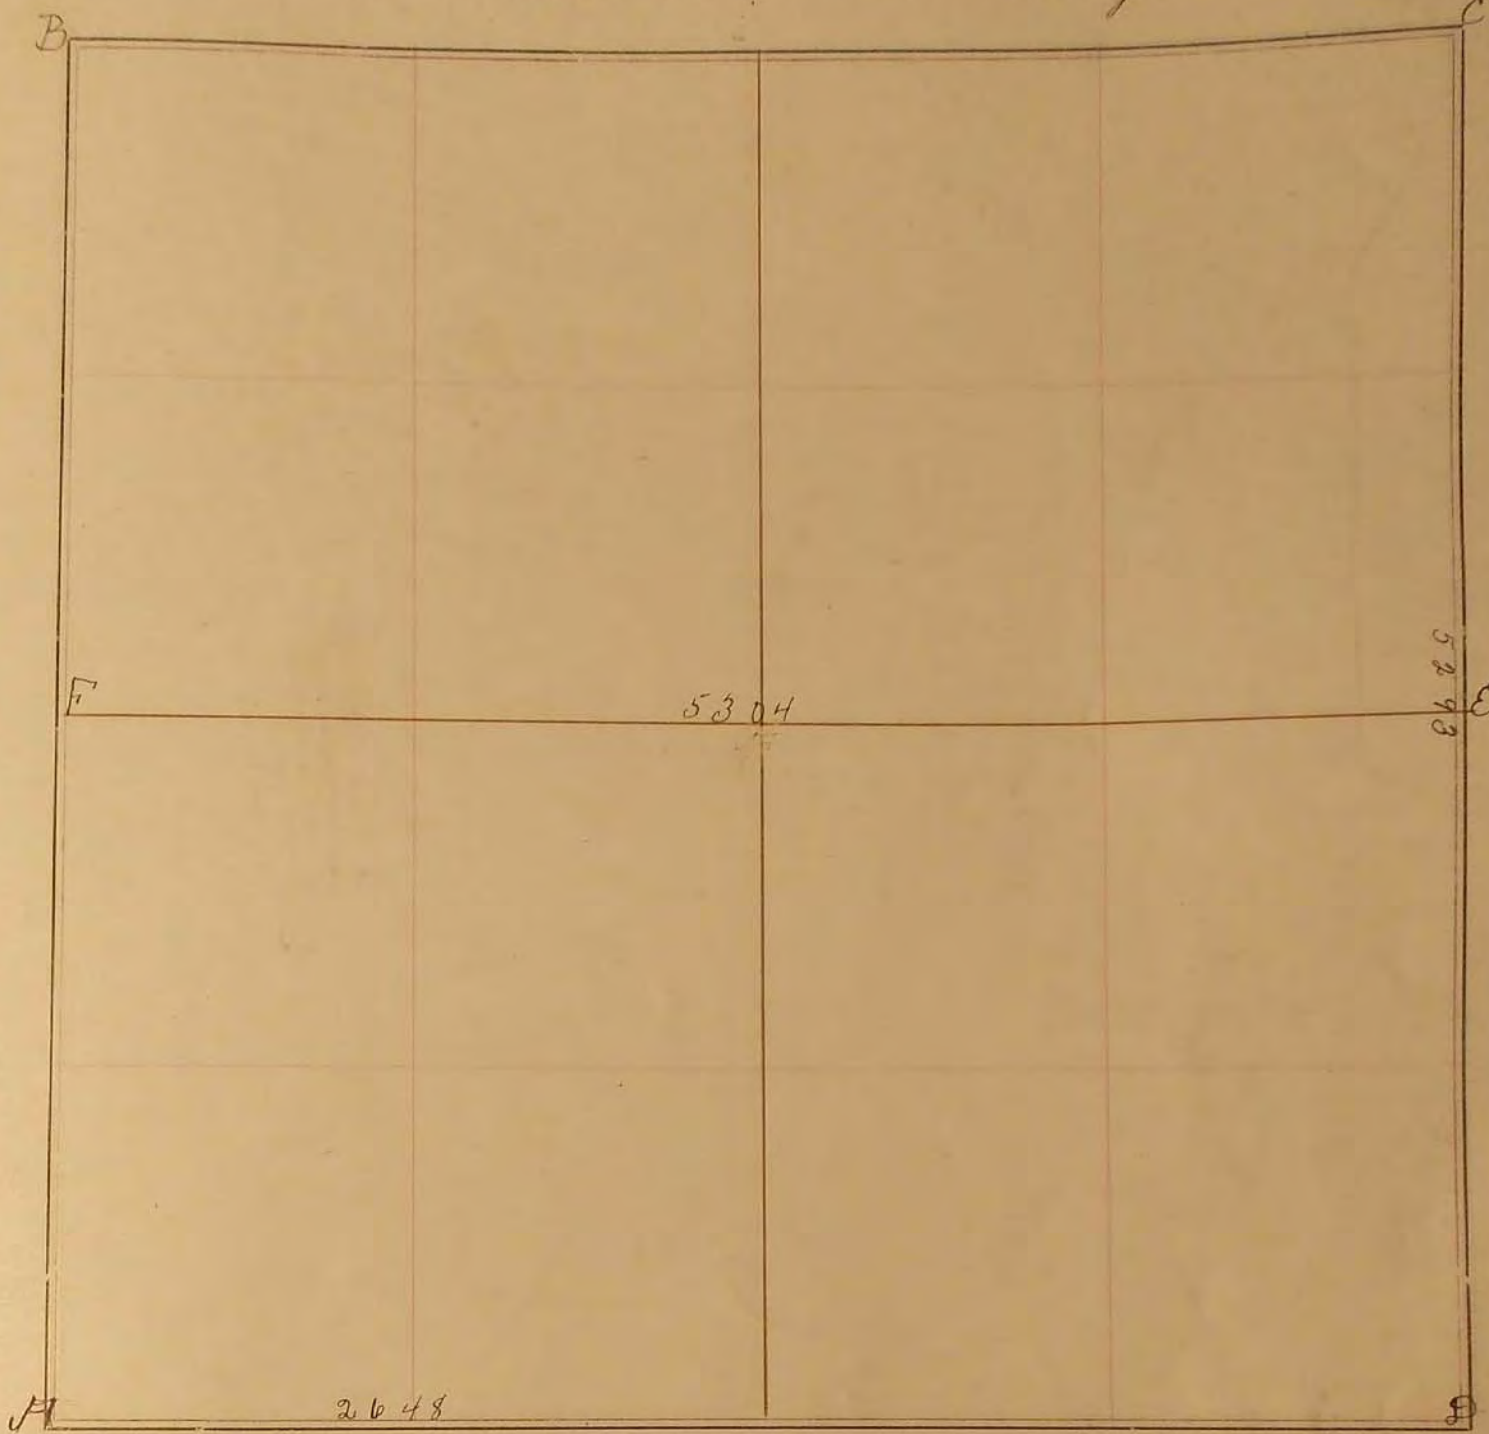

FIELD NOTES.

Mar. 24, 1898.

M.E. Kaspman July 21, 1955 Co. Surveyor

- A. 35 ft west and 34 ft south of trees.
- B. Stone 6x6x14. B.P. 71.15' W. Corner post + RR 79.7' S.S.W. steel corner post tubular
- C. Stone 1x3x16 in Gov mound.
- D. Stone in center of road.
- E. Gov mounds and pits; Stone 6x6x14.
- F. Stone 6x6x14.

J.W. Woolstenholpe