


SURVEYOR'S RECORD

Section 26

Township 106

Range 42

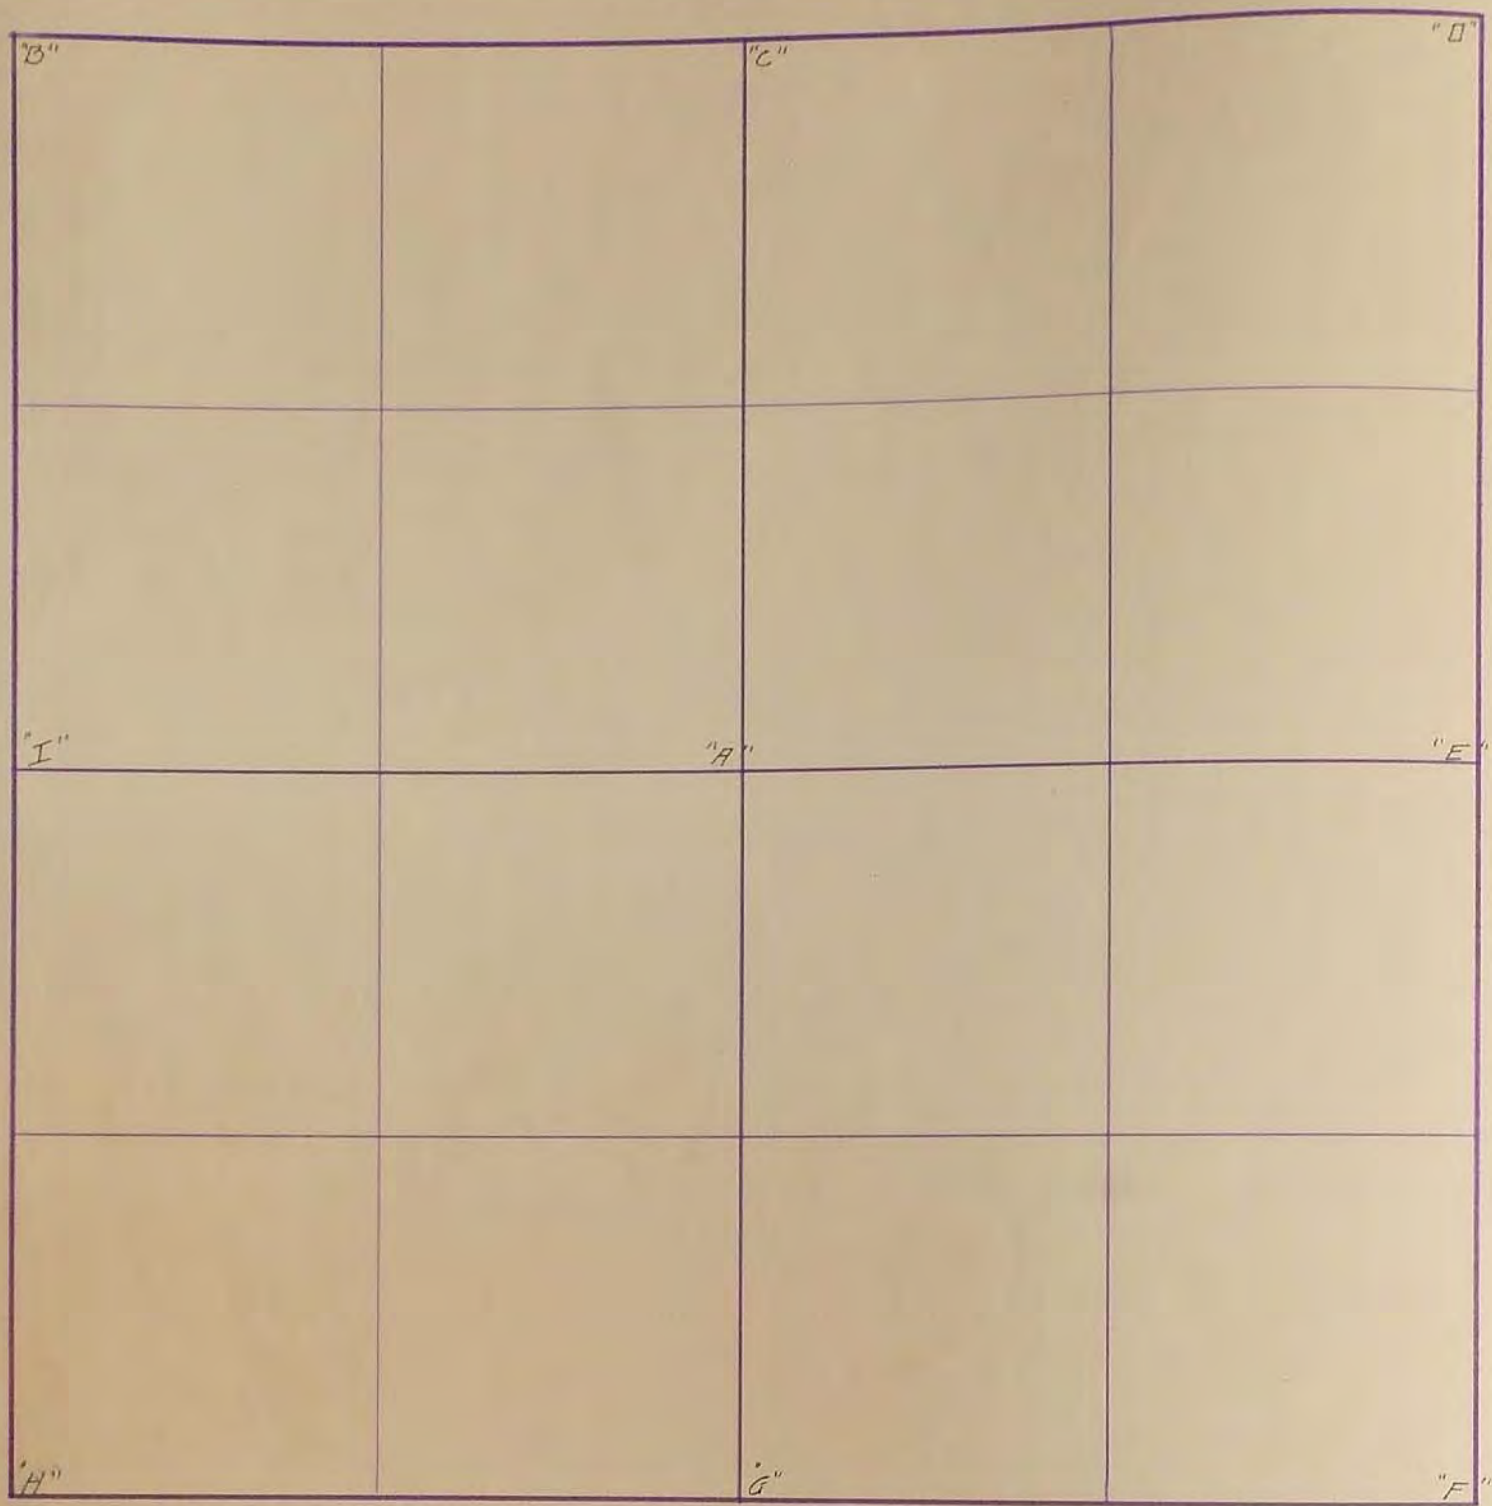

"G" Stone R.P. Tack in Cor fence post NW 46³ : R.P. Tack in Cor fence post N.E. 42.8' : R.P. Tack in Cor fence post SE. 41.8'

"H" Stone R.P. Tack in Cor fence post SE. 45.5' : R.P. Tack in Cor. fence post S.W. 43.5'

"I" Rock with stake 2ft South of Cor fence post F.A. March 7

"G" Found 2x2 hub 3 1/2' below Grade Level. Placed 5/8" steel pin above hub with Nail in oil mat.
7el. Term. 1.3' East of 3rd. Cor = 2' Mat.
 R.P. (N4C in P.P. N.E. 78.68' N4C in P.P. S.E. 77.31' N4C in P.P. S.W. 59.65') 11-15-71 Del. t.

"F" found Conc. Cylinder with "x" in Center. 1/2" below Grade level - R.P. N4C P.P. NW 48.46, R.P. Hub & Nail in fence post NW 46
 R.P. (N4C in P.P. S.W. 41.15' N4C in P.P. N.E. 49.45' N4C in C.F.P. N. on line. 95.94') 11-15-71 Del. t.

"A" Located 2x2 Hub 3.5' below oil mat; Placed Conc. monument top 1.8' below oil mat; March 22, 1973

Placed steel pin in 3" bituminous overlay July 5, 1973; R.P. N4C. Brace post N.E. 51⁵⁶; R.P. N4C, Cor Post West 50⁶²; R.P. N4C, Fence Post S.W. 75²⁵

"C" Located 1x2 Hub March 26, 1973; Placed steel pin in 3" bituminous overlay July 5, 1973; R.P. N4C, P.P. N.E. 51⁹⁵
 R.P. N4C, Cor Post SE. 60³⁰; R.P. N4C, Cor Post SW. 63⁶⁰

"G" Placed steel pin in 3" bituminous overlay July 6, 1973 (Used R.P. above)


"H" SW 500. Cor. - Located field stone 20" below gravel grade; Placed 18" steel re-bar above stone: R.P. N4C, SW 61.45;
 R.P. N4C, T&T, SE. 45.03; R.P. N4C, P.P. NW 43.35'. Oct. 11, 1974

"F"

26
27

SURVEY No. _____

Section 26 Town 106 Range 42

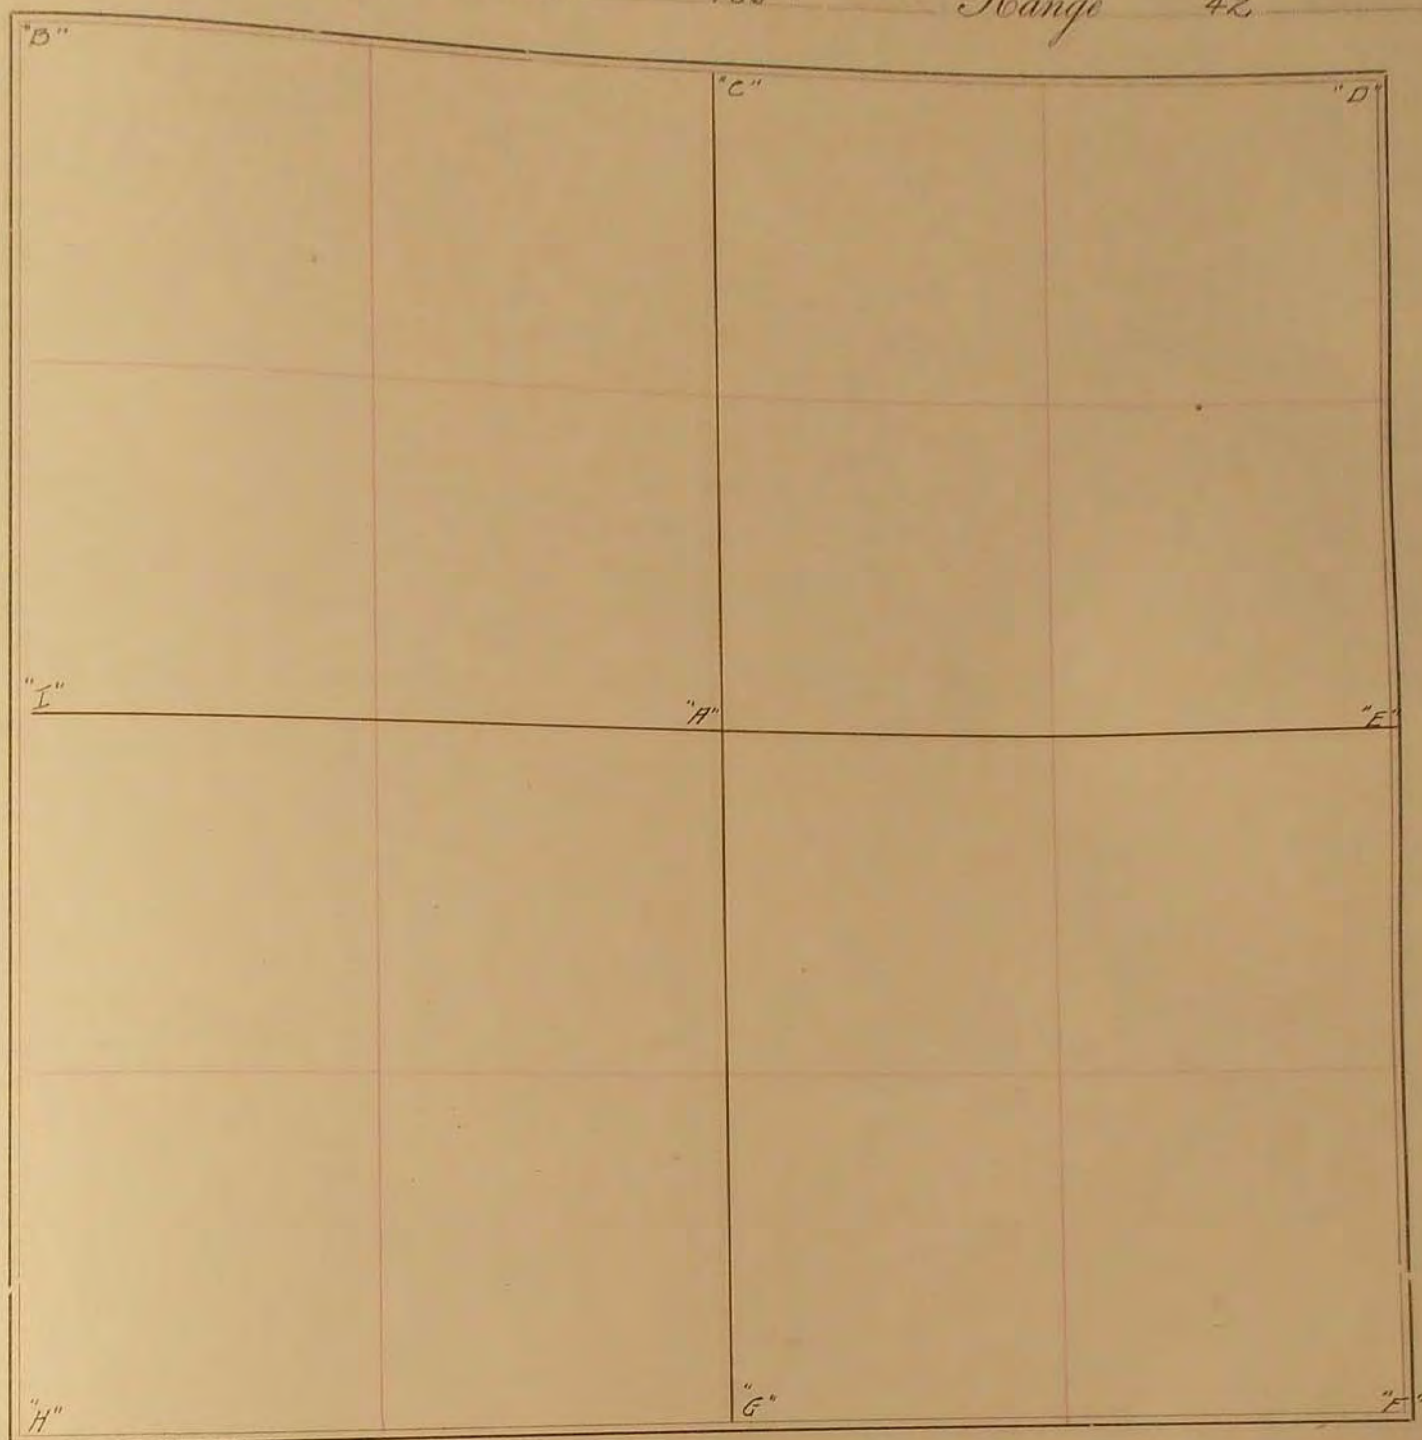

FIELD NOTES.

"G" Stone R.P. Tack in cor fence post N.W. 46⁰': R.P. Tack in cor.
 fence post N.E. 42⁰': R.P. Tack in cor fence post S.E. 41⁰
 "H" Stone R.P. Tack in cor fence post S.E. 45⁰': R.P. Tack in cor
 fence post S.W. 43⁰':
 "I" Rock with stake 2 ft south of cor fence post: F.A. Morch.