


SURVEYOR'S RECORD

Section 28

Township 105

Range 41

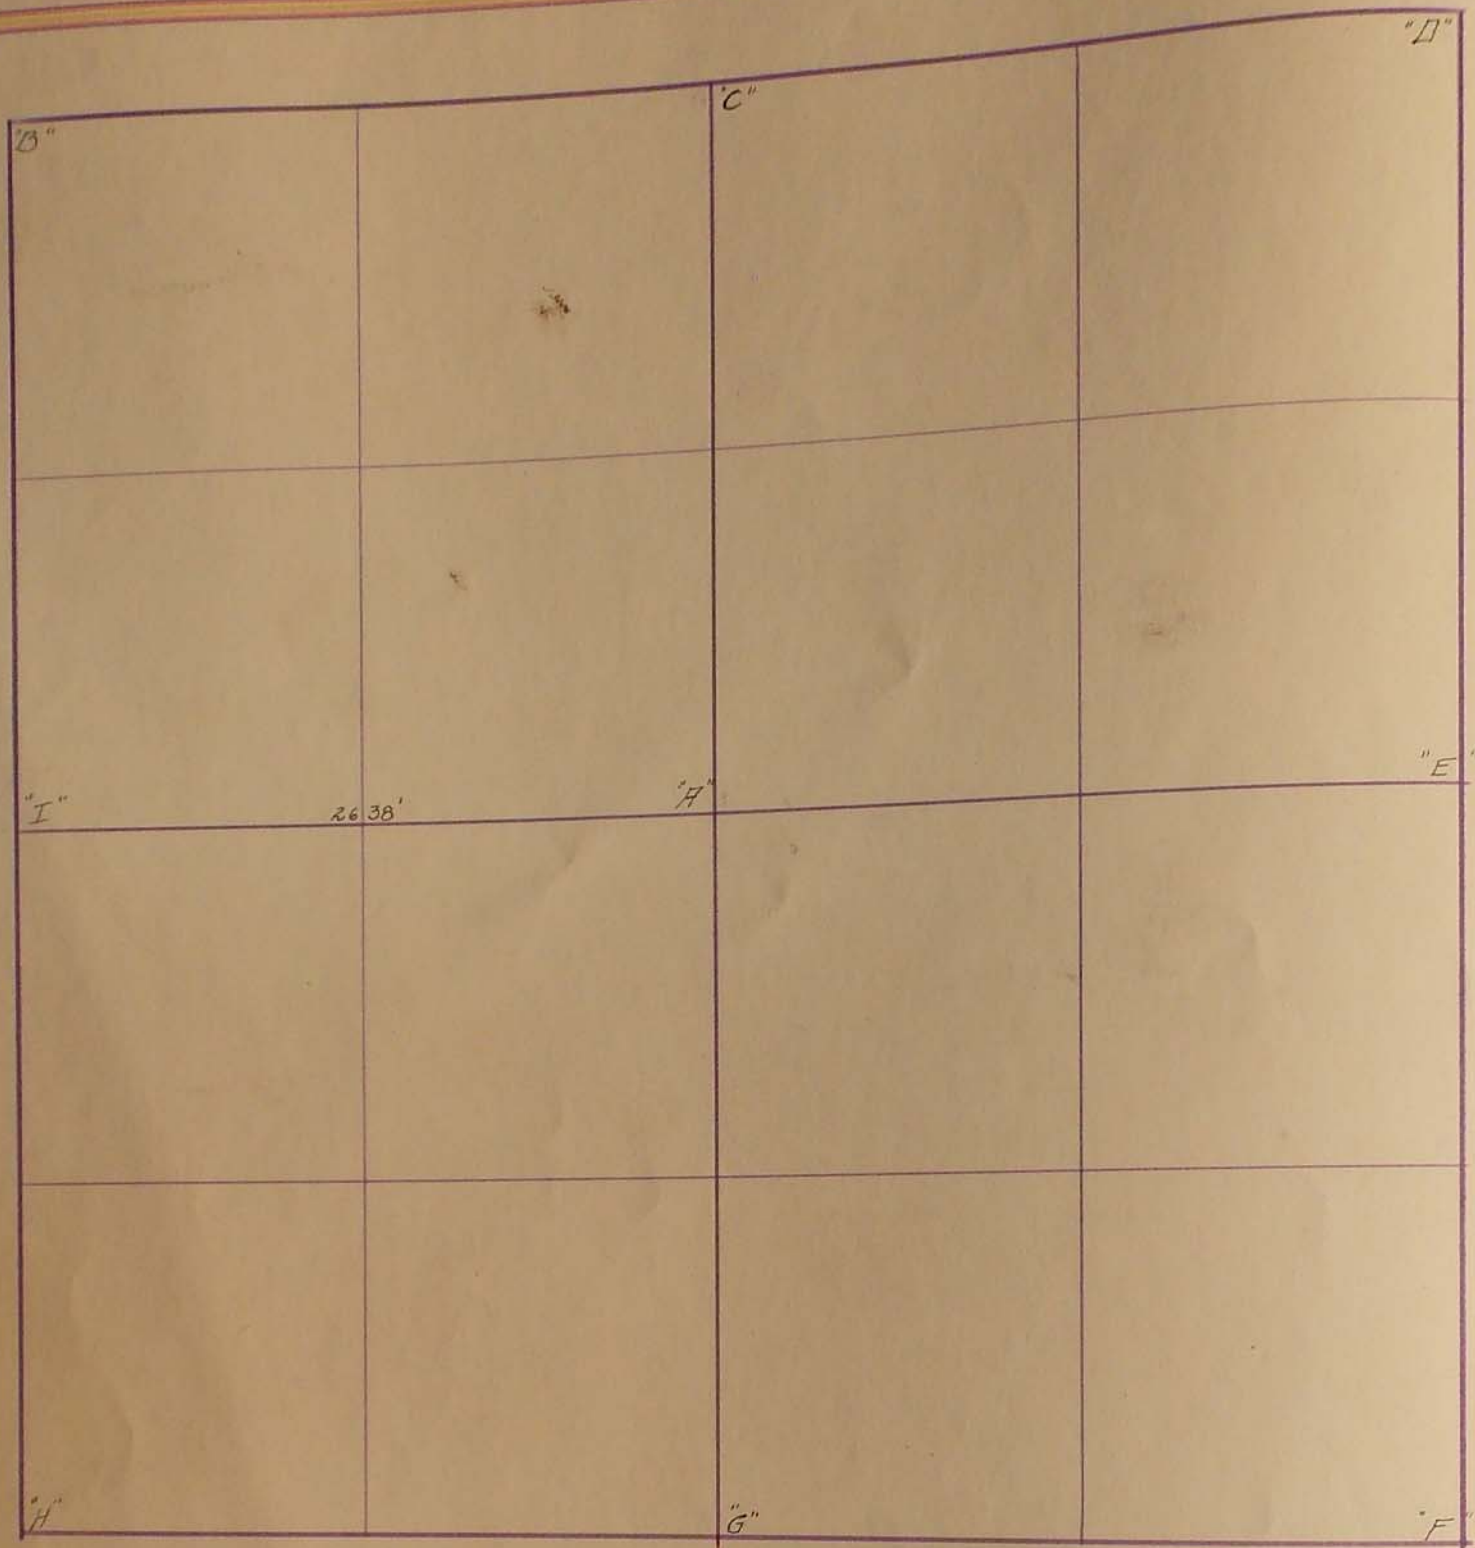

"B" Concrete Stone": R.P. Edge of Steel Cor. post West 34°: R.P.
Tack in tel. pole SE 52.2°: Tack in fence post NW. 46.8°
"I" Concrete Stone": R.P. Tack in cor. fence East 35°: R.P.
Tack in fence post NE 46°: R.P. Tack in Cor. fence post SW 45.8°
"D" Concrete Stone": R.P. Tack in Cor. post NE 49.0°: R.P. Tack in Cor.
post SE 52.4°

"C" Iron pin R.P., N&C. Cor. Post South 86.1'
R.P., N&C. P.P. NW. 89.65' Oct. 1967
"D" Iron pin R.P., N&C., T.P., SE. 58.2'
R.P., N&C., P.P., NW. 56.5' Oct. 1967
R.P. "X" on Culvert End N.E. 44.4'

~~"I" located cons. monument 8" below grade; placed 1/2" rebar above.
R.P., N&C., Sign post East 34.30'; R.P., N&C., Gate post, NE. 44.83',
R.P., N&C., Cor. post SW. 45.56'~~

Sept 29, 75

"I" Placed 18" Conc. Monu. 2" below Gravel surface.
R.P. N&C in t&t E. 51.07. Chisled "X" on Culv.
End N.E. 50.56. Nails in twp Road W. 100'-200'-300'

"B" Placed 18" Conc. Monu. 2" below Gravel surface.
R.P. N&C in sign post N.E. 57.04. Chisled "X" on Culv.
End S.W. 43.60. Chisled "X" on Culv. End N.W. 45.89'
Nails in blacktop East 100' & 200' Sept 29, 75

28
29