


# SURVEYOR'S RECORD

Section 34

Township 105

Range 41

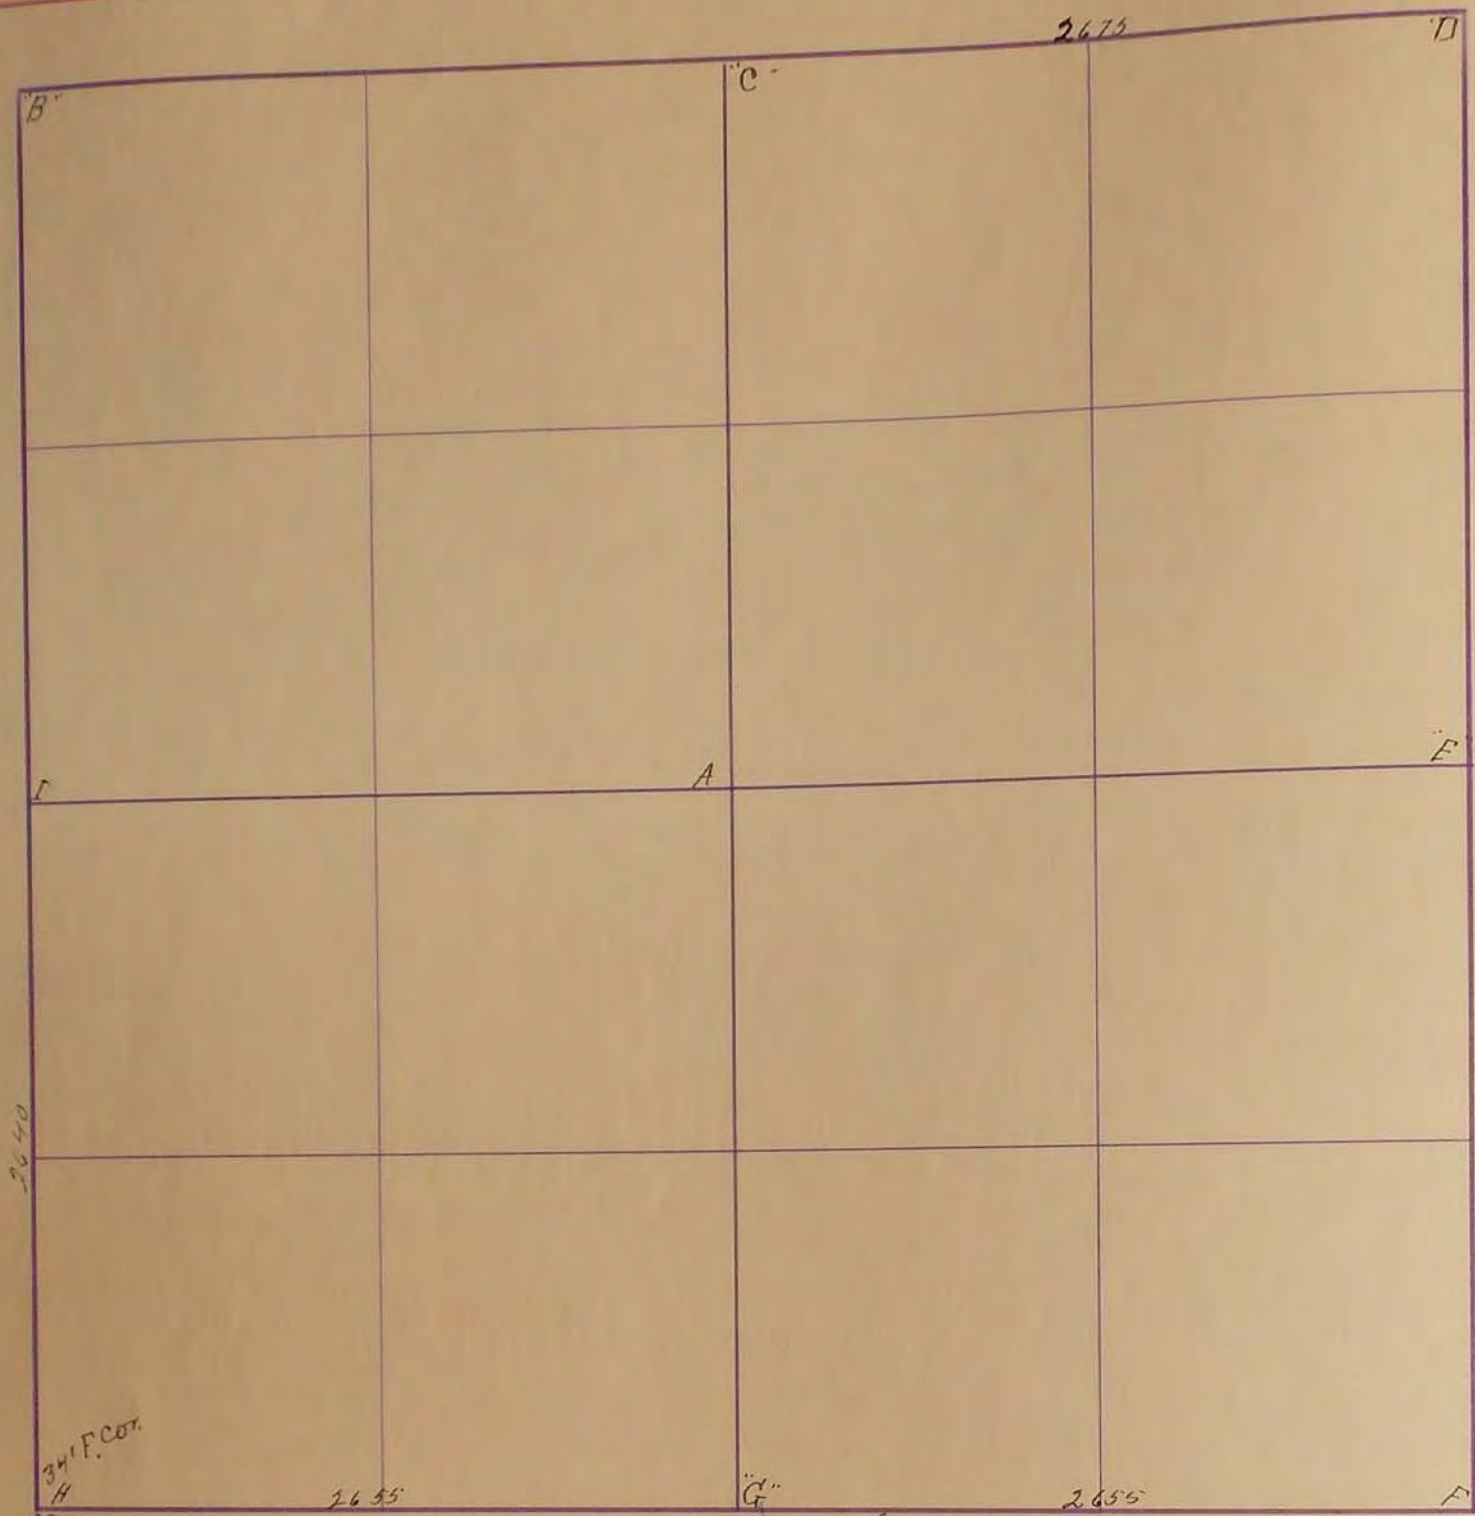

341 P. Cor.  
H  
323' 70' center bunch of willows  
F line

estonwood  
497'

1597'  
X N.W. Cor. as located May 13-1892 in old mound

May 19-1925

- B.
- C.
- D.
- E.
- F.

G. located N.W. Cor. 4258.5 east + 587.1 south

H. Found gov. stake & placed stone in place 2913.5' west of H.E. cor.

H. as given in survey 1892

I. measure from fence line

Feb. 5 1934

"D" concrete stone; R.P. Zack + cor fence post SE 45.7'

R.P. Zack + cor fence post S.W. 44.9'

"E" concrete stone; R.P. Zack + cor fence post west

on line 22.7'; R.P. Zack + cor fence post East

on line 32.3'; R.P. Zack + cor fence post SE 39.9'

"F" concrete stone; R.P. Zack + cor fence post

NE 480' R.P. Zack + cor fence post SE 39.0' R.P. Zack and


cor fence post S.W. 46.6'

"G" concrete stone; R.P. Zack + cor fence post SE 45.6'

R.P. Zack + cotton wood stump S.W. 56.6' F.P. March

SURVEY No. \_\_\_\_\_

Section 34 Town 105 Range 41

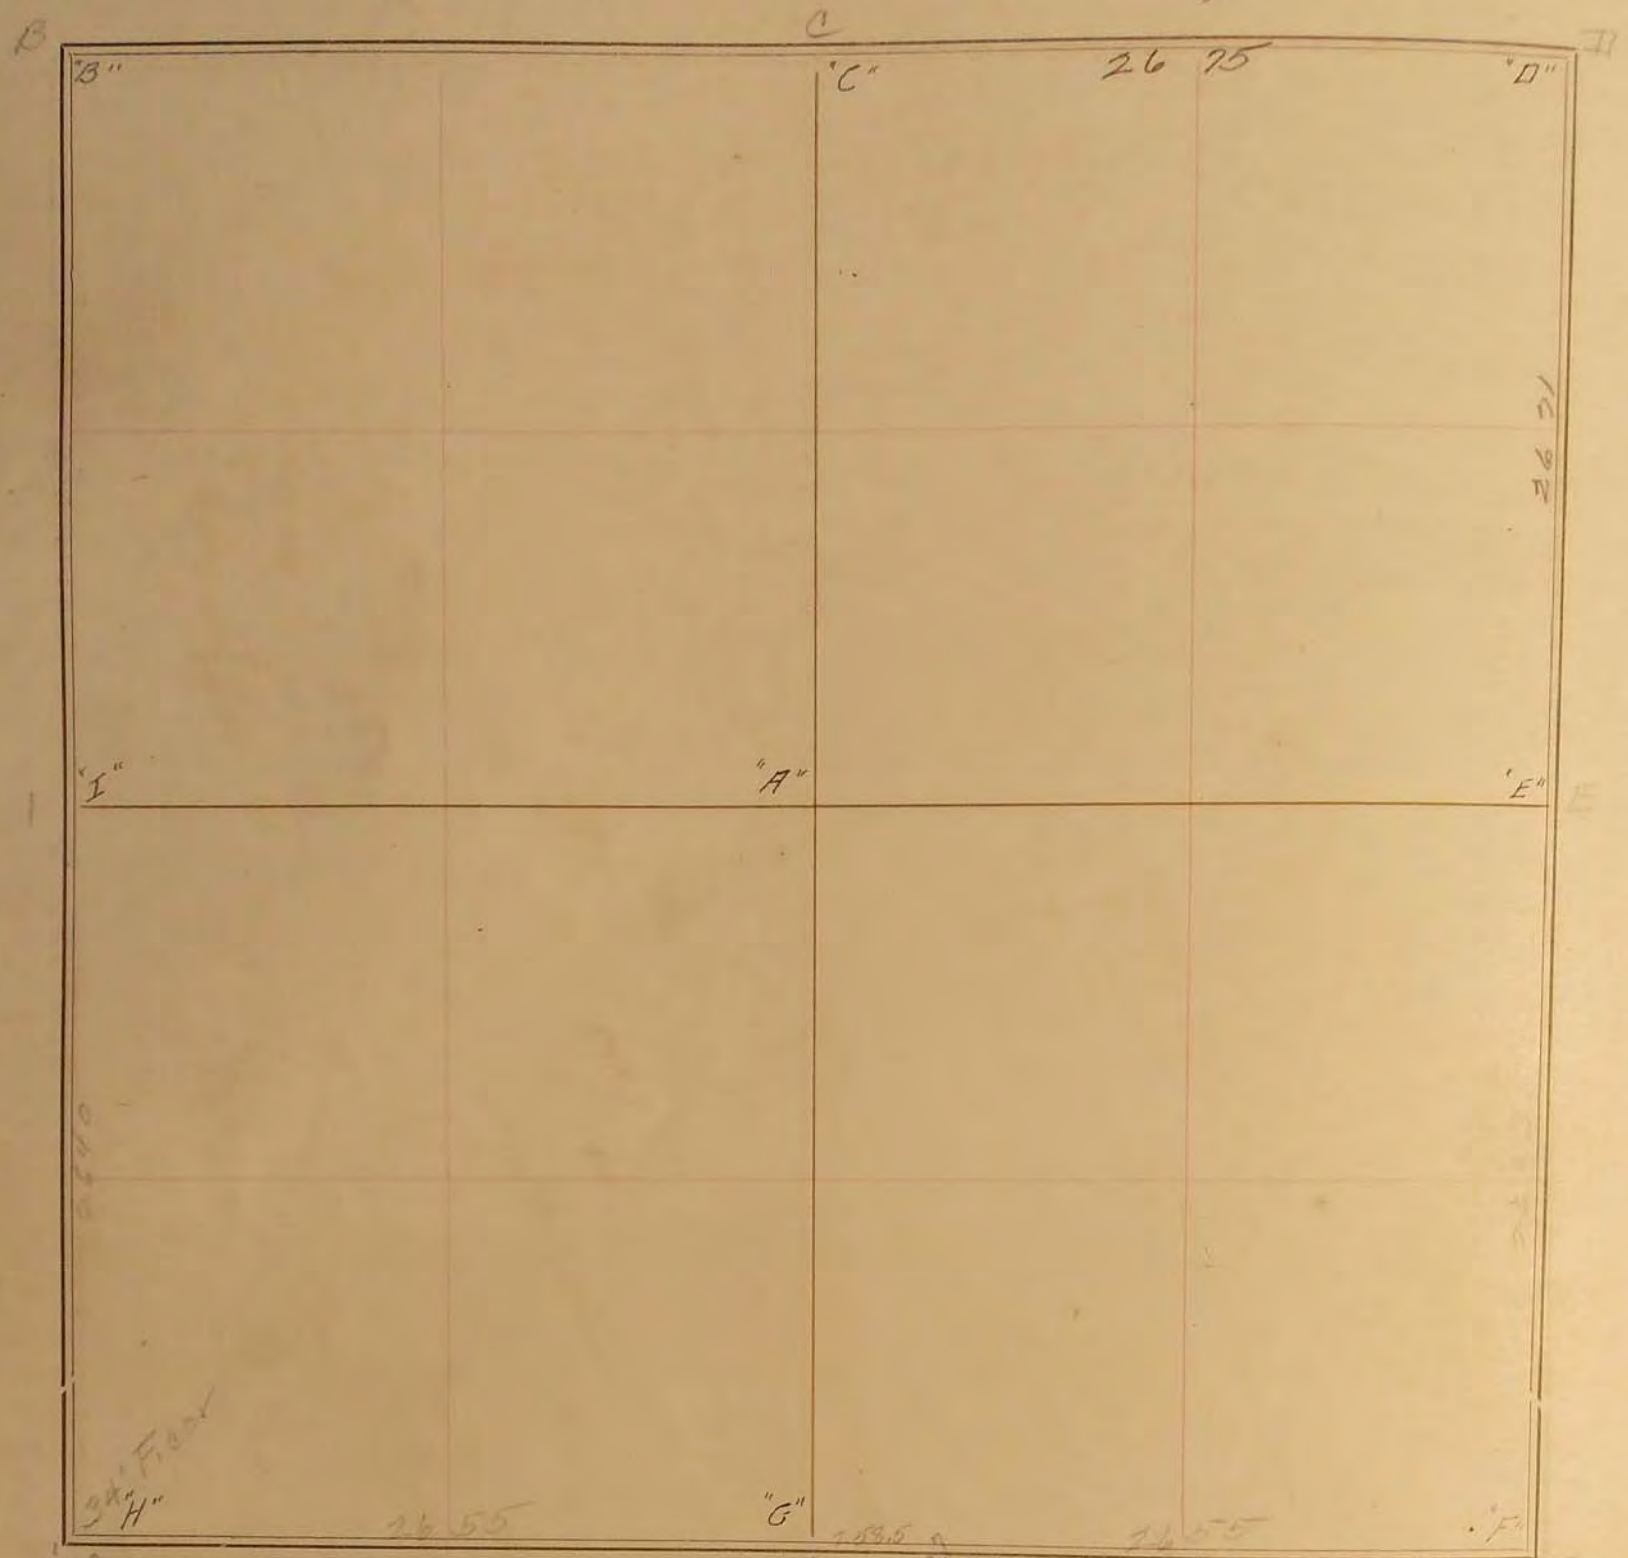

HW Cor Sec 3 as located May 12, 1892  
 cottonwood stump  
 20' center of section  
 Full line  
 34'

FIELD NOTES.

May 14, 1925

- B
- C
- D
- E
- F
- G - located, N.W. Cor. 4 - 256.5' east + 581.7' south
- H - Found Gov. Stake + placed stone in place, 2012.5' south of N.E. Cor. 4 - as given in survey 1892
- I - measured from base line

- February 5, 1934
- D - corner stone: R.P. Tack + cor. pine post S.E. 45.7'
  - R.P. Tack + cor. pine post S.W. 44.9'
  - E - corner stone: R.P. Tack + cor. pine post West on line 33.7'; R.P. Tack + corner pine post East on line 33.3'; R.P. Tack + cor. pine posts S.E. 39.7'
  - F - corner stone: R.P. Tack + cor. pine post N.E. 45.0'; R.P. Tack + cor. pine post S.E. 39.0'; R.P. Tack and cor. pine post S.W. 46.5'
  - G - corner stone: R.P. Tack + cor. pine post S.E. 45.6'; R.P. Tack + cotton wood stump S.W. 56.5'
- S.A. March.