

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Center Corner of Section 4, Township 108, Range 41, 5TH P.M.

STATE OF MINNESOTA, County of Murray

At the corner location shown on the sketch:

- ☐ On _____ found a _____
DATE
- ☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)
- ☒ On 7/7/2026 placed a 3" survey spike with seal #43844.
DATE


SKETCH OF REFERENCE TIES

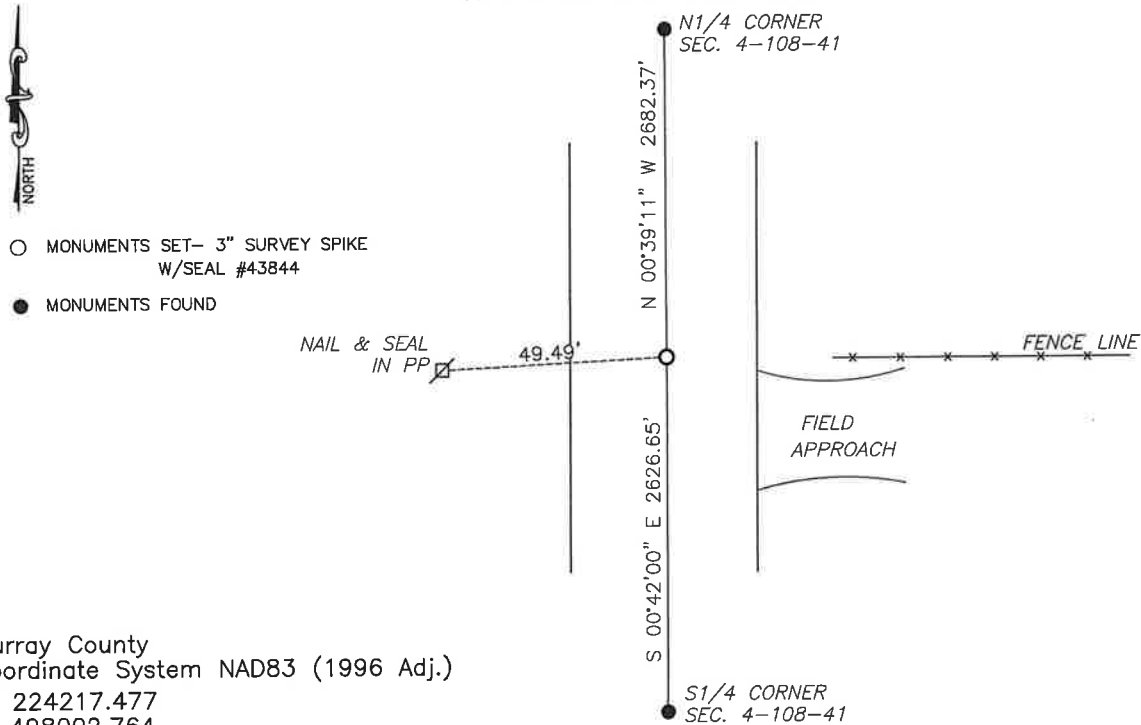

Murray County
Coordinate System NAD83 (1996 Adj.)
N: 224217.477
E: 498002.764

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.




Daniel L. Bueltel
License No. 43844

7/30/2026
DATE

RECORDING INFORMATION

JUL 31 2026



MURRAY COUNTY RECORDER

Statement of Evidence

Center of Section 4, T108N, R41W of the 5th P.M.

September 1858 - W.J. Neely surveyed the North township line.

July 1861 - J.W. Myers surveyed the East, West, and South township lines.

September 1861 - L.G.M. Fletcher subdivided the township.

February 6, 1934 - County records show a concrete stone with an "x" at the corner.

September 30, 1974 - County records show a concrete monument found and a steel pin set above the monument.

May 17, 2021 - Bueltel-Moseng Land Surveying found a $\frac{1}{2}$ " iron monument at the corner.

July 7, 2026 - Bueltel-Moseng Land Surveying set a 3" survey spike with seal #43844 at the location of the previously found $\frac{1}{2}$ " iron after the county over lay project.