

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 1, Township 106, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of Murray

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 5/23/2025 placed a 5/8" iron with seal #43844 on line in between the section
DATE corners and in line with the fence line running west.

SKETCH OF REFERENCE TIES

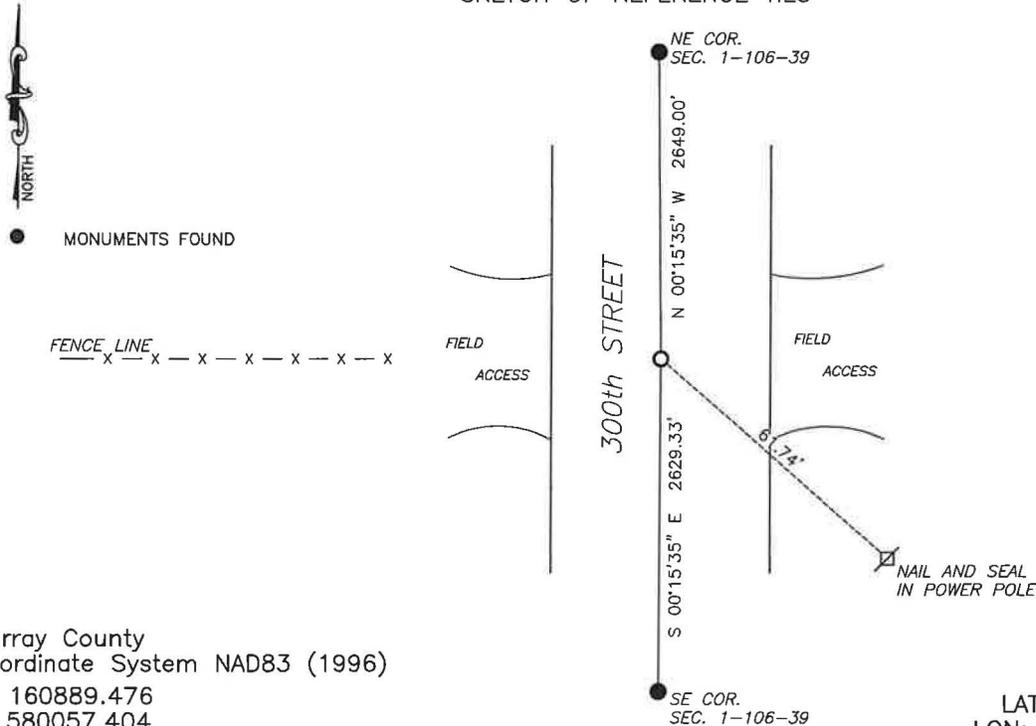

Murray County
 Coordinate System NAD83 (1996)
 N: 160889.476
 E: 580057.404

WGS84
 LAT: 44°00'52.8131"
 LON: -95°27'44.5609"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Bueltel
 Daniel L. Bueltel
 License No. 43844

8/8/2025
 DATE

AUG 12 2025

Karen Brown

MURRAY COUNTY RECORDER

Statement of Evidence

EAST QUARTER CORNER SECTION 1, T106N, R39W OF THE 5th P.M.

In September 1858, W.J. Neely surveyed the east township line.

In July of 1861, J.W. Myers surveyed the north, south, and west township lines.

In August of 1861, Wellman & Smoot subdivided the township.

On June 28, 2024 Bueltel-Moseng Land Surveying searched with a metal locator in the center line of the road and in line with the fence line the west and found nothing.

On July 22, 2024 dug a 6' x 10' x 5' deep hole with a backhoe and found nothing. Nothing was ever recorded at the corner. The best fit for the corner is in line with the fence line and in the center line of the road.

On May 23, 2025 set a $\frac{5}{8}$ " iron with seal #43844 on line between section corners and in line with fence line to the west.