

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter \_\_\_\_\_ Corner of Section 13, Township 106, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On 6/10/2025 found a 3/4" IRON PIPE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_

### SKETCH OF REFERENCE TIES

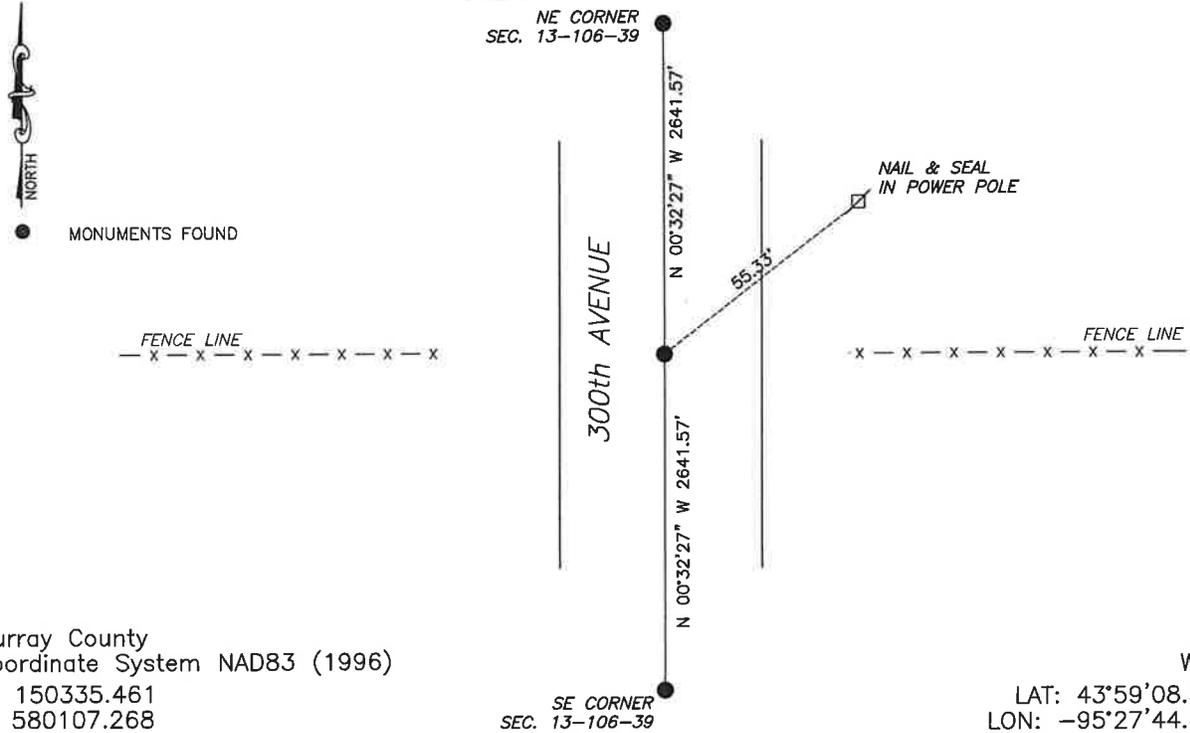

Murray County  
Coordinate System NAD83 (1996)  
N: 150335.461  
E: 580107.268

WGS84  
LAT: 43°59'08.5940"  
LON: -95°27'44.4118"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*Daniel L. Bueltel*  
Daniel L. Bueltel  
License No. 43844

8/8/2025  
DATE

AUG 12 2025

*Karen Brown*

**MURRAY COUNTY RECORDER**

Statement of Evidence

EAST QUARTER CORNER SECTION 13, T106N, R39W OF THE 5th P.M.

In September 1858, W.J. Neely surveyed the east township line.

In July of 1861, J.W. Myers surveyed the north, south, and west township lines.

In August of 1861, Wellman & Smoot subdivided the township.

A survey dated March 2, 1914 by J.W. Woolstencroft shows he established the corner midway between the section corners but does not note what was set.

A survey by John Madsen, LS #13593, dated November 20, 1992 shows that he set a  $\frac{3}{4}$ "x24" iron pipe midway and on line between the section corners.

County records from 1997 notes Zieske Land Surveying found a  $\frac{3}{4}$ " iron pipe at the corner.

On June 10, 2025 Bueltel-Moseng Land Surveying found a  $\frac{3}{4}$ " iron pipe at the corner, accepted the pipe as the corner.