

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 17, Township 105, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

On 3/6/2025 found a steel pin.  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 10/8/2025 placed a 3" survey spike with seal #43844 at the location of the steel pin after the road over lay.  
DATE

SKETCH OF REFERENCE TIES

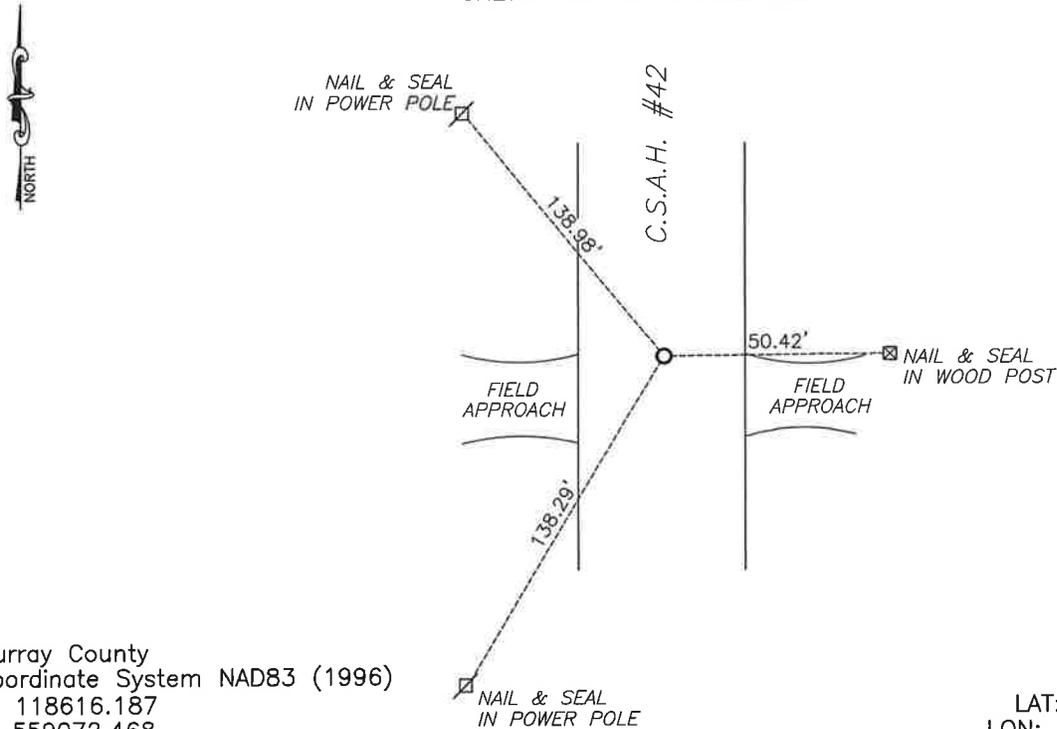

Murray County  
Coordinate System NAD83 (1996)  
N: 118616.187  
E: 559072.468

WGS84  
LAT: 43°53'56.0399"  
LON: -95°32'33.2724"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Bueltel  
License No. 43844

1/16/2026  
DATE

MURRAY COUNTY RECORDER

JAN 20 2026

Statement of Evidence

East Quarter Corner Section 17, T105N, R39W of the 5th P.M.

In September of 1858 W.J. Neely surveyed the South township boundary.

In July of 1861 J.W. Myers surveyed the North, East, and West township boundary lines.

In August of 1861 Wellman & Smoot subdivided the township.

Survey record of section 17 dated October 2, 1898 notes a stake located at the corner.

Survey record of section 17 dated March 28, 1972 notes a field stone located at the corner.

A survey in section 16 by Perry Zieske, L.S. 23008, dated November 18, 2013 notes an iron monument found at the corner.

On March 6, 2025 Bueltel-Moseng Land Surveying found a steel pin located at the corner. Returned on October 8, 2025 and set a 3" survey spike with seal #43844 at the location of the steel pin after the road over lay.