

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 24, Township 107, Range 40, 5TH P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

On 7/10/2025 found a 3/4" iron with an aluminum cap stamped "DNR SURVEY MARKER"

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

SKETCH OF REFERENCE TIES

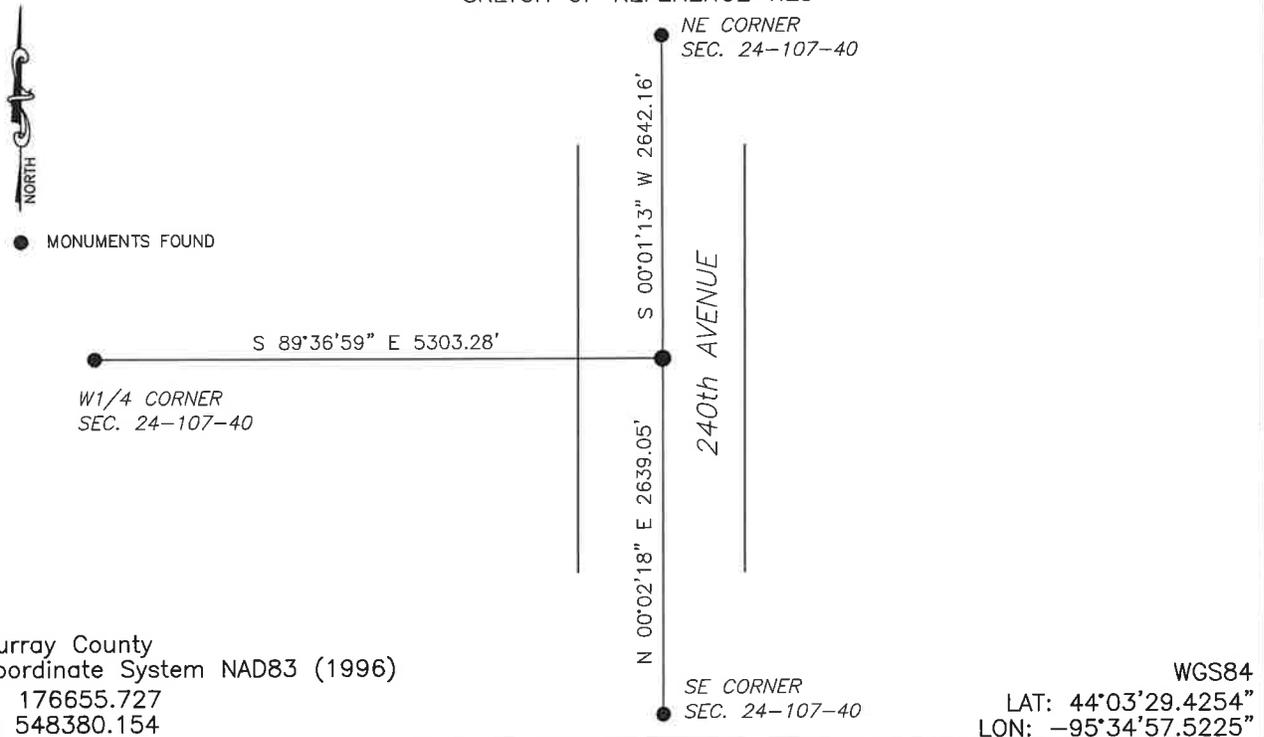

Murray County
Coordinate System NAD83 (1996)
N: 176655.727
E: 548380.154

WGS84
LAT: 44°03'29.4254"
LON: -95°34'57.5225"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Bueltel

1/16/2026
DATE

License No. 43844

MURRAY COUNTY RECORDER

Karen Brown

JAN 20 2026

Statement of Evidence

East Quarter Corner Section 24, T107N, R40W of the 5th P.M.

In 1861 J.W. Myers surveyed the original township lines.

September 1861, L. Brockmann did the original township subdivision.

A corner certificate by Bruce Shepperd, L.S. 17003, dated May 8, 1991 shows he found a 15" x 12" x 20" stone down 0.10' and placed a $\frac{3}{4}$ " x 24" rebar down 2.5' under the stone which was reset down 0.5'.

On July 10, 2025 Bueltel-Moseng Land Surveying found a $\frac{3}{4}$ " iron with an aluminum cap stamped "DNR SURVEY MARKER". Accepted the iron as the corner.